

Keyword:
XOL – Extended Operating Life

Model: **SL-850**

Performance Data **Size ½AA**
 (Typical values for batteries stored at 25°C for one year)


System	Li/SOCl ₂
Nominal voltage	3.6 V
Nominal capacity	1.2 Ah
Nominal current	0.5 mA
Max. continuous discharge current	20 mA
Max. pulse current capability	50 mA
Anode surface area	6 cm ²
Lithium content	0.35 g
Weight	9 g
Volume	4.3 cm ³
Temperature range	-55...+85 °C

WARNING:
 Fire, explosion, and severe burn hazard. Do not recharge, disassemble, heat above 100 °C, incinerate, or expose contents to water.


UL recognition under file MH 12827

See also our website under Products/Safety




Typical Discharge Curves at +25°C

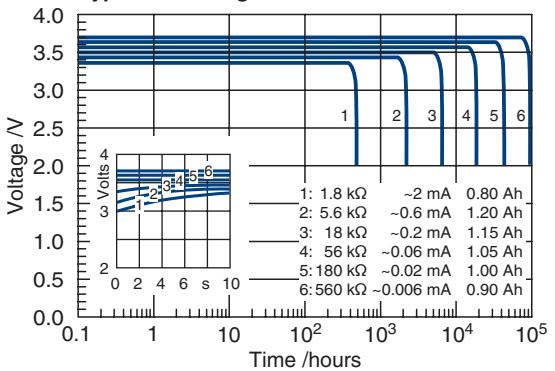


Available Capacity

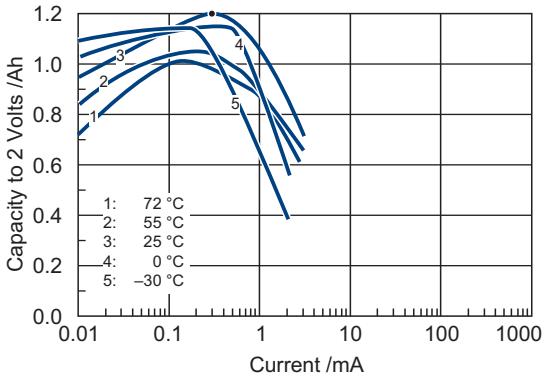


Operating Voltage

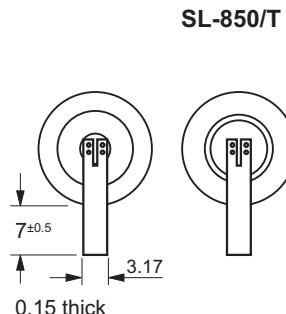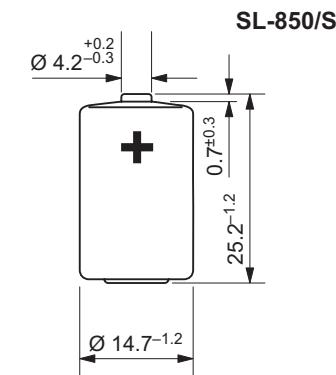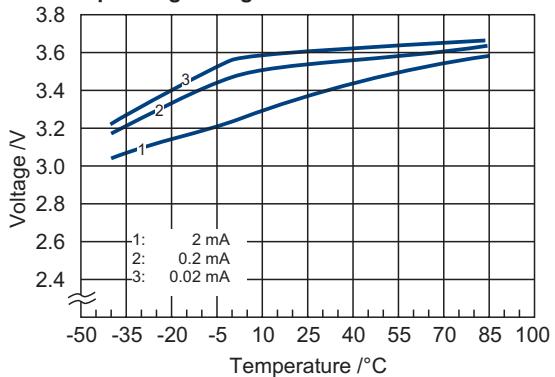


SL-850/P

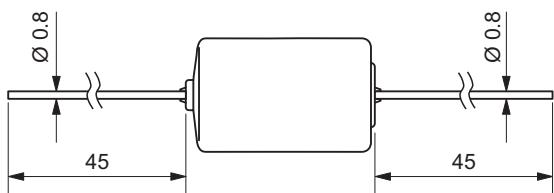

SL-850/PR

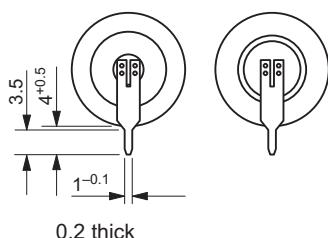

SL-850/PT

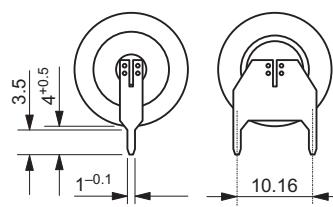

Available Terminations

SL-850/S	Standard	11 1 08501 00
SL-850/T	Tags	11 1 08502 00
SL-850/P	Pins	11 1 08503 00
SL-850/PR	Pins Radial	11 1 08506 00
SL-850/PT	Polarized Tags	11 1 08508 00

Catalogue No.

Any values given here are for information purposes only. They also depend on actual conditions of use and are not warranties of future performance. Subject to change.