

Part number

TM 3265 IR



Interlocked switched socket-outlet, TM series, 3 poles + N + PE, 6 h (red), 32 A, 200/346 ÷ 240/415 V, with compartment for modular units, 6 DIN-rail modules EN 60715, with base box



Product description		Material properties	
Product type	Interlocked switched socket-outlet	Colour	RAL 7012 grey, RAL 3000 red
Series	TM..IR/KIR		Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight
N. of poles	3 poles + N + 	RoHs conformity	
Clock position	6	China RoHs - EFUP	50
Size	145 x 565 x 18 mm	REACH SVHC substances	Yes Lead
Specification	With compartment for modular units, 6 DIN-rail modules EN 60715 With base box	SCIP number	F6799547-ab84-42f2-938f-233ba663766d
Technical data		Approvals / Standards	
Current	32 A	Reference standard	EN 60309-1, -2 e -4
Voltage	200/346 ÷ 240/415 V	General ordering information	
IP degree of protection	IP66 / IP67	EAN13 code	8015747092005
Further technical details		Packaging Information	
Weight	2.825,00 g	Sub-packaging length	150,00 mm
Operating temperature range (min, max)	-25°C ... +40°C	Sub-packaging height	188,00 mm
UL 94 flammability rating	V-2	Sub-packaging width	430,00 mm
IK rating (impact degree of protection)	IK10	Sub-packaging weight	2,83 kg
		Sub-packaging volume	12,13 dm³
		Sub-packaging description	Carton box
		Sub-packaging quantity	1 Pcs
		Sub-packaging EAN barcode	8015747092029

Part number

TM 3265 IR



Catalogue drawings

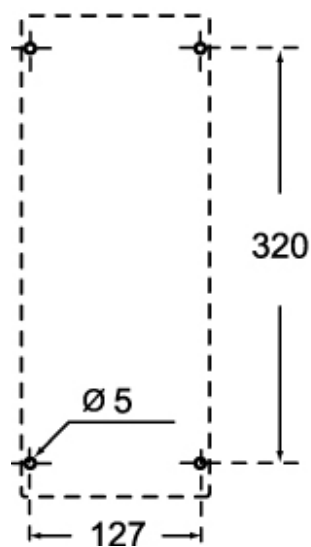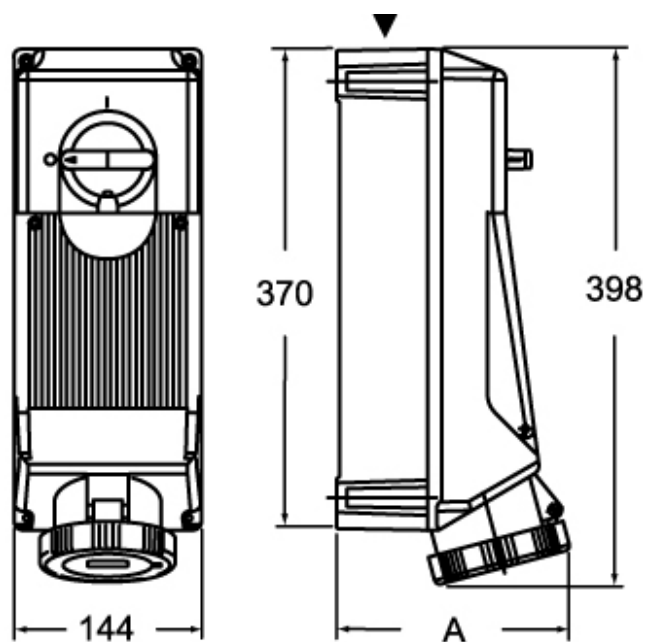

	A
2P+⊕	162
3P+⊕	162
3P+N+⊕	169

Notes

Dimensions shown in mm are not binding and may be changed without notice.