



70 RT HP is a complete offer of rotary isolator switches from 16 A to 160 A, available in boxes both in insulating material and aluminium, in control or emergency versions, compatible with the main applications for residential, tertiary and industrial contexts.

DC versions for photovoltaic applications are also available from 16 A to 40 A in insulating box.


The series is completed with versions for board from 16 A to 1000 A and for DIN rail fixing from 16 A to 63 A, which can be equipped with auxiliary contacts.

The devices have been designed to reduce wiring time, facilitate installation and guarantee the maximum safety and robustness even in the most demanding conditions.

ELECTRICAL CHARACTERISTICS

ELECTRICAL CHARACTERISTICS		- Caractéristiques fonctionnelles		-
Organe de coupure	Interrupteur-sectionneur rotatif	Versions		Depuis le coffret
Courant nominal (A)	315	Nb mod. EN 50022		14
Nombre de pôles	4P	Plage de réglage		161 - 256 mm
Courant en AC21A (415V)	315	Type		Commande
Courant en AC22A (415V)	315	Couleur poignée		Noir
Courant en AC23A (415V)	315	Verrouillable		OUI (3 cadenas maxi. sur OFF)
Puissance dissipée par pôle	20,8 W/pôle	ACCESSORIES		-
Section des câbles	1x185-2x185 mm²	Type d'accessoire		Max. 8 contacts auxiliaires (4 par côté)

DIMENSIONS

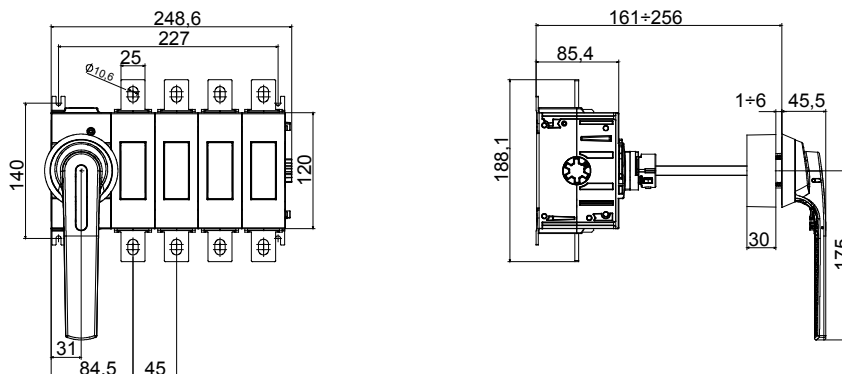

NORMES ET HOMOLOGATIONS

