

STREET [O₃] LED

GEWISS




IP66



$t_{min} -25^{\circ}C$

1x16 LEDs	8,5	Max 15m	0,21m ²	0,11m ²
2x16 LEDs	9,1			
3x16 LEDs	9,7			
4x16 LEDs	10,3			
5x16 LEDs	10,9			









STREET [O3]		I _{LED} (A)			
		t _a 50 °C	t _a 45 °C	t _a 40 °C	t _a 35 °C
STAND-ALONE / DIMMABLE 1-10V	1x16 LED	0,7 A	0,7 A	0,7 A	0,7 A
	2x16 LED	0,55 A	0,6 A	0,6 A	0,7 A
	3x16 LED	0,55 A	0,65 A	0,7 A	0,7 A
	4x16 LED	0,55 A	0,6 A	0,65 A	0,7 A
	5x16 LED	0,45 A	0,5 A	0,55 A	0,55 A
BI-POWER WITH SELF-LEARNING	1x16 LED	0,55 A	0,55 A	0,55 A	0,55 A
	2x16 LED	0,55 A	0,55 A	0,55 A	0,55 A
	3x16 LED	0,55 A	0,55 A	0,55 A	0,55 A
	4x16 LED	0,55 A	0,55 A	0,55 A	0,55 A
	5x16 LED	0,45 A	0,45 A	0,55 A	0,55 A
DALI	1x16 LED	0,55 A	0,55 A	0,55 A	0,55 A
	2x16 LED	0,55 A	0,55 A	0,55 A	0,55 A
	3x16 LED	0,55 A	0,55 A	0,55 A	0,55 A
	4x16 LED	0,55 A	0,55 A	0,55 A	0,55 A
	5x16 LED	0,45 A	0,45 A	0,55 A	0,55 A


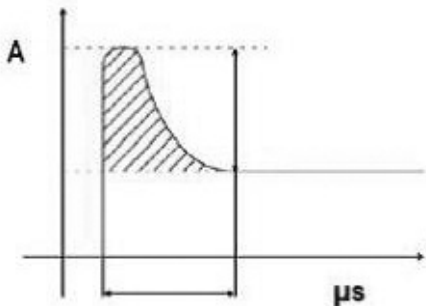


	I _{LED} (mA)	Inrush current peak and width
STREET [O ₃] STAND-ALONE / DIMMING		
1x16 LEDs	700	5 A / 50 μs
2x16 LEDs	700	35 A / 1000 μs
3x16 LEDs	700	35 A / 1000 μs
4x16 LEDs	700	35 A / 1000 μs
5x16 LEDs	700	35 A / 1000 μs
STREET [O ₃] BI-POWER		
1x16 LEDs	550	27 A / 265 μs
2x16 LEDs	550	46 A / 250 μs
3x16 LEDs	550	53 A / 300 μs
4x16 LEDs	550	53 A / 300 μs
5x16 LEDs	550	53 A / 300 μs

STREET OPTICS			CYCLE AND PEDESTRIAN OPTIC
ST 1	ST 2	ST 3	3,1 m
3,1 m	2,2 m	2,4 m	




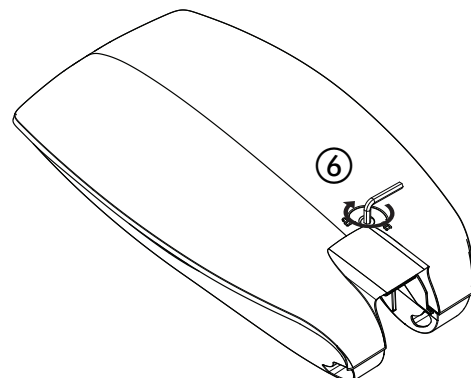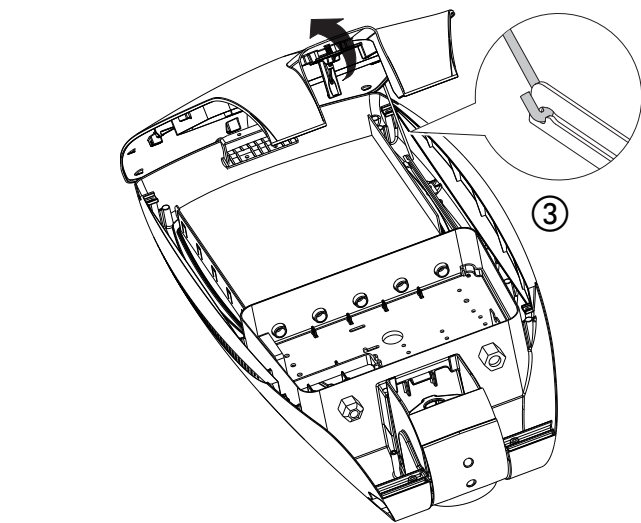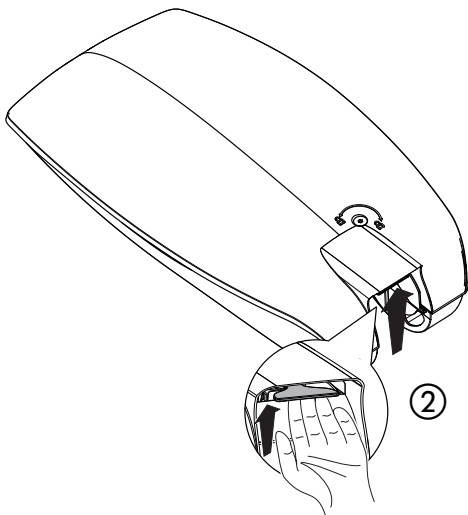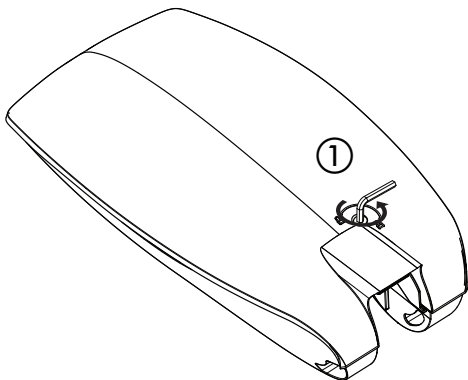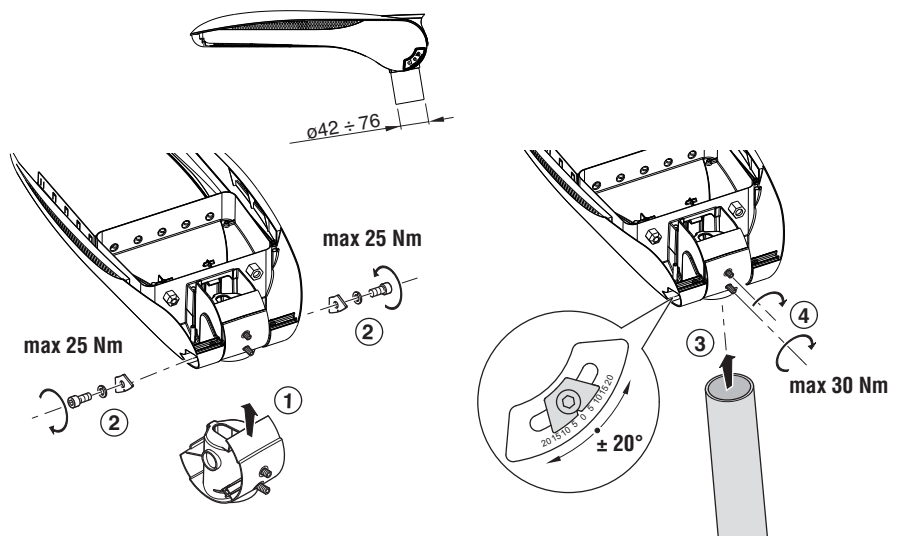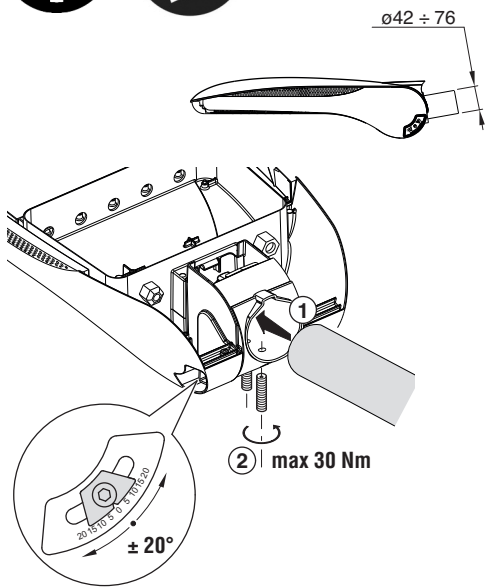

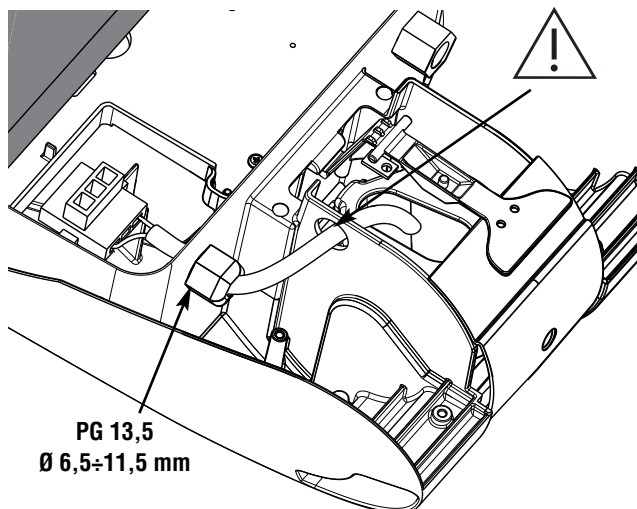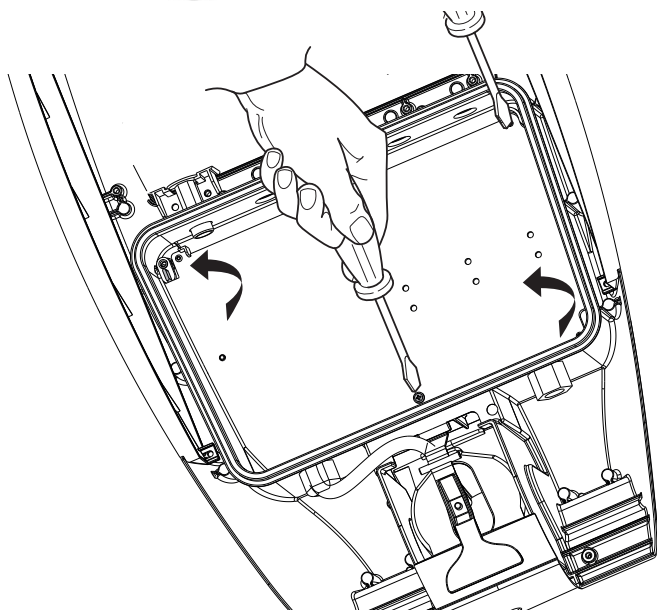


PG 13,5
Ø 6,5÷11,5 mm

2 x max 2,5 mm²



DIMMING 1-10V

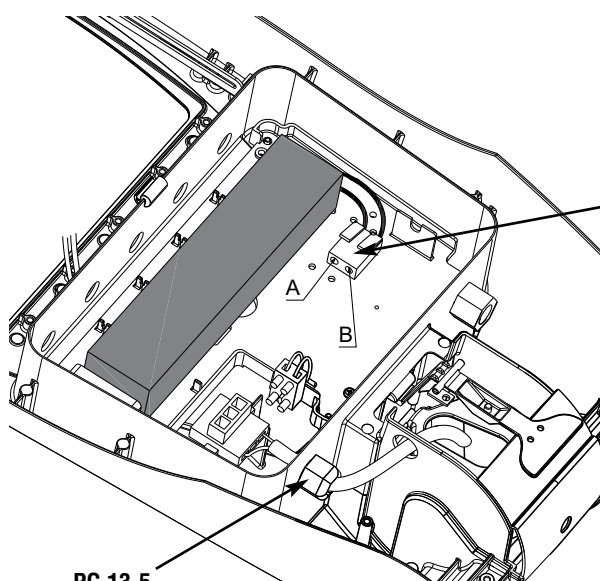


DIMMING 1-10V

PG 13,5
Ø 6,5÷11,5 mm

STREET O3 1x16 LED - Max 700mA


	6	5	4	3	2	1
OFF						
ON						
SEC	6	5	4	3	2	1
350 mA	-	-	-	-	-	-
500 mA	ON	-	-	-	-	-
550 mA STANDARD	-	ON	-	-	-	-
650 mA	ON	-	-	ON	-	-
700 mA	ON	ON	-	-	-	-







STREET O3 2x16 / 3x16 / 4x16 / 5x16 LED - Max 700 mA

	ON	OFF	ON	OFF
SEC	1	2	3	4
200 mA	-	-	-	-
250 mA	ON	-	-	-
300 mA	-	ON	-	-
350 mA	ON	ON	-	-
400 mA	-	-	ON	-
450 mA	ON	-	ON	-
500 mA	-	ON	ON	-
550 mA	ON	ON	ON	-
600 mA	-	-	-	ON
650 mA	ON	-	-	ON
700 mA	-	ON	-	ON



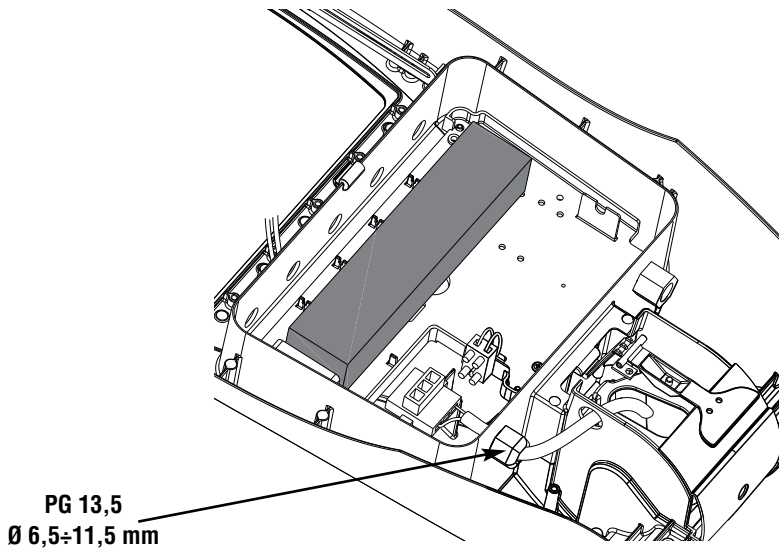

Dim level (%)	T-dim (hrs)	T-down (hrs)	After Midpoint (hrs)
50	5	1	4

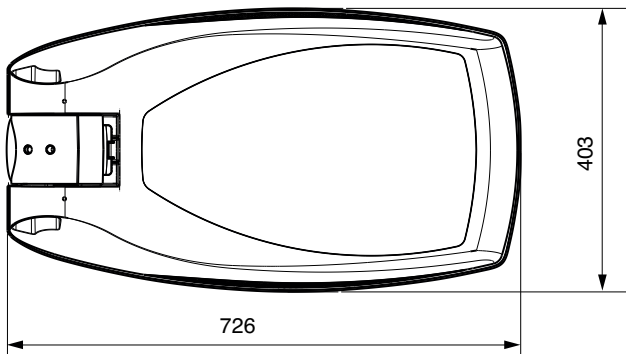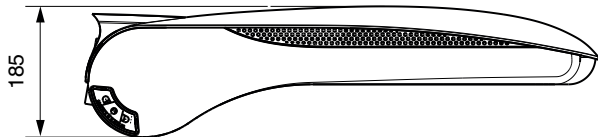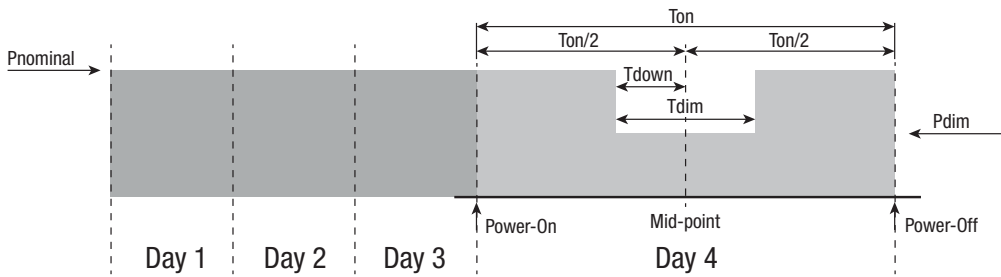

Punto di contatto indicato in adempimento ai fini delle direttive e regolamenti UE applicabili:
Contact details according to the relevant European Directives and Regulations:
GEWISS S.p.A. Via D.Bosatelli, 1 IT-24069 Cenate Sotto (BG) Italy tel: +39 035 946 111 E-mail: qualitymarks@gewiss.com

According to applicable UK regulations, the company responsible for placing the goods in UK market is:
GEWISS UK LTD - Unity House, Compass Point Business Park, 9 Stocks Bridge Way, ST IVES
Cambridgeshire, PE27 5JL, United Kingdom tel: +44 1954 712757 E-mail: gewiss-uk@gewiss.com

 **+39 035 946 111**
8:30 - 12:30 / 14:00 - 18:00
lunedì - venerdì / monday - friday

 www.gewiss.com

