




Wi-Fi communication interface module (GW90953) must be coupled on the right side of ReStart Autotest 2P and ReStart Autotest PRO 2P. Thanks to Wi-Fi ReStart APP, you can monitor the system status in real time and everywhere. The proper functioning of the residual current device can be tested at all times, operating self-diagnosis remotely with your APP: you have the possibility to have details about date, time and outcomes of all the Autotest operations. You can see the values of the energy produced and consumed, the active and reactive power, the current and the voltage of the system.

Description	Module interface Wi-Fi	Code	90 ReStart range
Nb mod. EN 50022	1	Adapté pour	ReStart Autotest PRO 2P
Fréquence nominale (Hz)	50	Tension nominale	230/240 V a.c.
Puissance max absorbée	1,6 W	Température d'utilisation	-25 +60 °C
Tension nominale tenue à l'impulsion	4 kV	Couple de serrage nominal	0,4 Nm
Température de stockage	-40 +70 °C	Tension nominale d'isolation (Ui)	500 V
Norme	EN 61326-1; EN 301489-1; EN 301489-17	Système de distribution	TT - TN-S
Section bornes	2,5 mm ²	Minimum requirements of the operating system	Android 4.4 / iOS 9
Wi-Fi communication	2.4	Maximum Wi-Fi range	100m free space transmission (towards router) - 80m free space transmission (other directions)
Maximum measurable current	80 A	CT maximum cable section	25 MM2
Mesure des valeurs électriques	Oui		

DIMENSIONS

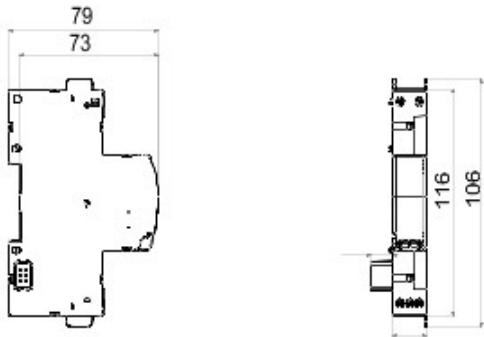

NORMES ET HOMOLOGATIONS

