




A system of command and control wireless devices based on Zigbee technology that offers innovative solutions for the renovation of buildings, minimizing the structural interventions. Zigbee is a safe and reliable system because the data exchanged are encrypted and every node of the network always ensures reachability among all the devices (mesh network). The Zigbee devices enrich the range of home&building automation solutions by Gewiss and can be managed via App, with smartphone and tablet, through the Smart Gateway.

Catégorie	Window sensor	Couleur	
Matière	Plastique	Protocole de communication	Blanc Zigbee (IEEE 802.15.4)
Tension d'alimentation	Alimenté par batterie	Piles d'alimentation	2 x AAA replaceable
Capteur type	Magnétique	Output power	3 dBm
Capteur de température	0...50 °C	Norme	2014/53/EU, EN 60669-2-1, ETSI EN 300 328
Indice de protection	IP40	Température de fonctionn.	0 ÷ +50 °C
Température de stockage	-20 ÷ +80 °C	Relative humidity (non-condensative)	10 ÷ 95%
Dimensions LxHxP (mm)	76x26x17	Electrocod	051A

DIMENSIONS

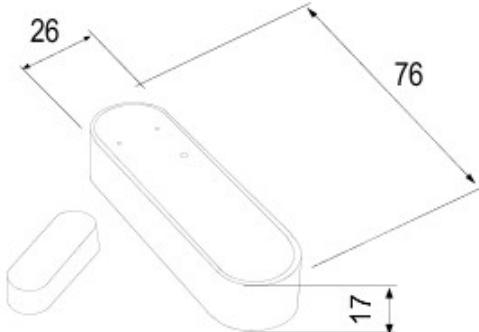

SYMBOLE TECHNIQUE

IP

IP40

NORMES ET HOMOLOGATIONS

