


TECHNICAL DATA

Product type	Waterproof socket
Product NO.	SAC3MPX (03)

SAC3MPX (03) Product Appearance

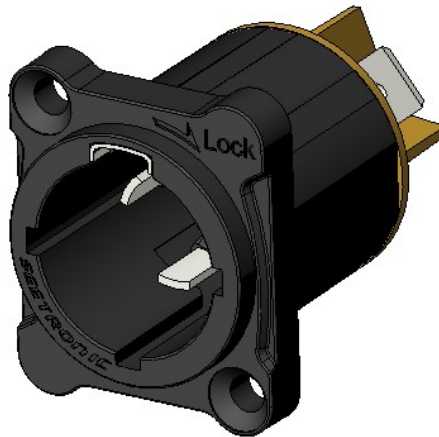

Product features

- ✓ Quick, simple locking system
- ✓ Connect reliably
- ✓ Small size of product

Technical parameters**1. Electrical parameters**

Contacts NO.	2+PE
Rated current	16A
Rated voltage	250V AC
Contact resistance	$\leq 5\text{m}\Omega$
Dielectric strength	4000V DC
Insulation resistance	$> 1000\text{M}\Omega$

2. Mechanical parameters

Service life	> 1000
Power line	$2.5\text{mm}^2(12\text{AWG})$
Solderability	Complies with IEC 68-2-20


3. Material and environmental parameters

Shell	PA
Contacts	Cu alloy
Contact surface	Ag
Protection degree	IP65
Flame-retardant grade	UL94-V0
Temperature range	-30°C to $+80^{\circ}\text{C}$

4. Standard

Standard	IEC61984
----------	----------

Product Profile

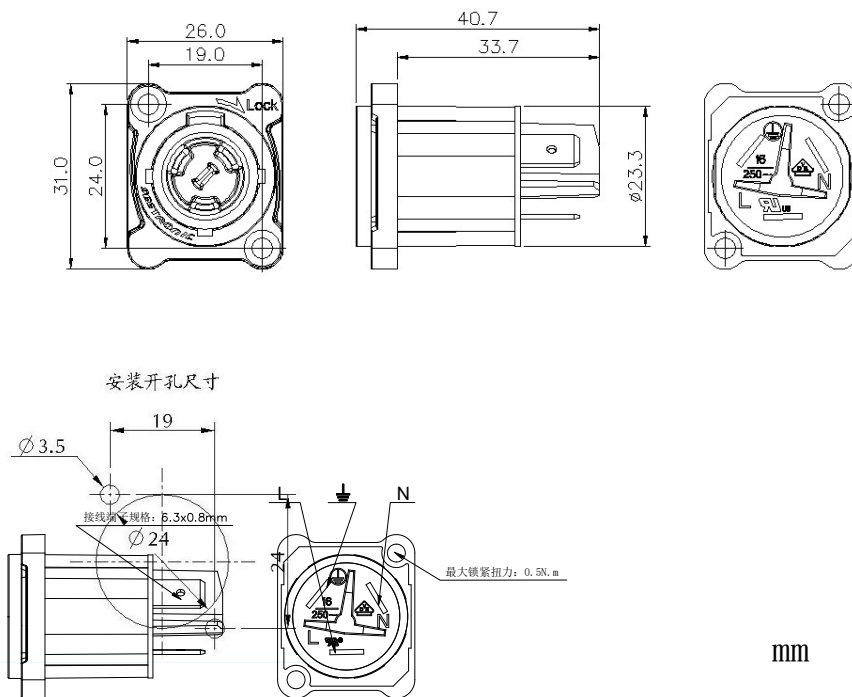

Installation instructions

Socket installation direction : Before the installation

