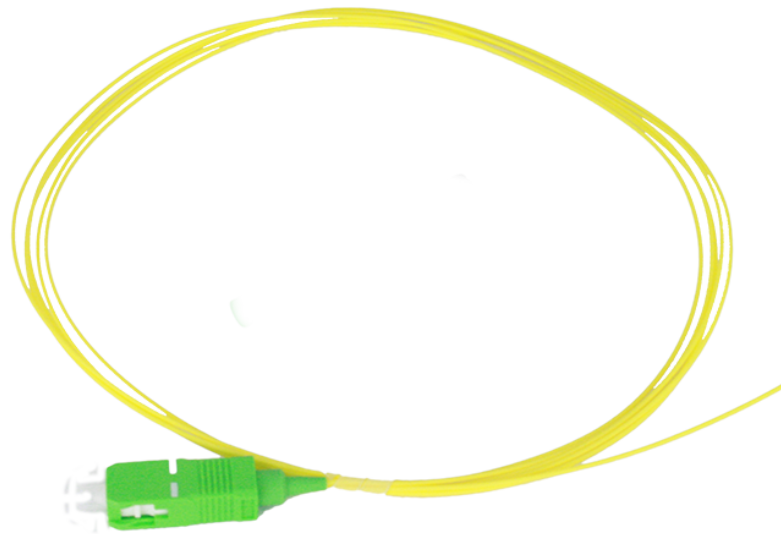


PT150

Single-mode fiber G.657.A2 pigtail**DESCRIPTION**

1FO pigtail in G.657.A2 single-mode fiber with SC/APC connector ensuring insertion loss <0.5 dB. LSZH sheath limits smoke and toxic substances in case of fire. Diameter 0.9 mm and length 1.5 m facilitate installation in confined spaces. Suitable for optical networks and secure industrial environments.

**ADVANTAGES**

- Singlemode fiber G.657.A2 compatible with modern optical networks
- SC/APC connector with insertion loss <0.5 dB
- LSZH sheath limiting smoke and toxic substances in case of fire
- 0.9 mm diameter facilitating installation in confined spaces



Updated: 10/07/2026

This document is confidential and is the property of ADALTRA. ADALTRA holds the copyright, and the document must not be copied or modified in any form, in whole or in part, without the prior written permission of ADALTRA. The specifications contained in this document are non-contractual and may be subject to change without prior notice.

CONSTRUCTION & TECHNICAL PERFORMANCE

Outer Sheath Material	LSZH
Product Length	1500
Sheath Type	LSZH
Outer Diameter (mm)	900
Connection	SC/APC
Weight (Kg/U)	0.10

ELECTRICAL CHARACTERISTICS

Return Loss (dB)	>60
Insertion Loss (dB)	<0,5

TRANSMISSION CHARACTERISTICS

Fiber (µm)	Momomode 0.9mm G657-A2
------------	------------------------