


VK95R10

H07V-K 1X95mm² harmonized wiring wire red



DESCRIPTION

Flexible wiring wires, harmonized H07V-K, are used for electrical cabinet equipment and internal device wiring. They are available in common standard colors.

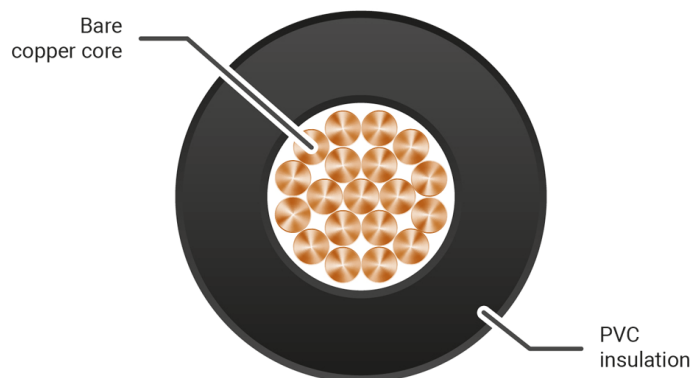

ADVANTAGES

- Harmonized HAR wiring wires
- Flexibility facilitating wiring
- Flame retardant
- Possible drum packaging
- Many colors available

AXINDUS
/ ADALTRA

Updated: 26/06/2026

This document is confidential and is the property of ADALTRA. ADALTRA holds the copyright, and the document must not be copied or modified in any form, in whole or in part, without the prior written permission of ADALTRA. The specifications contained in this document are non-contractual and may be subject to change without prior notice.

CONSTRUCTION & TECHNICAL PERFORMANCE

Product Type	H07V-K
Construction (mm ²)	1 x 95 mm ²
Conductor material	Bare copper
Conductor cross-section	95 mm ²
Core composition	IEC 60228 Cl. 5
Insulation Material	PVC
Minimum Insulation Diameter (mm)	15,1
Maximum Insulation Diameter (mm)	18,2
Color	Red
External Conductor Colors	Red
Weight (Kg/Km)	0.99

ELECTRICAL CHARACTERISTICS

Service Voltage (V)	450 V / 750 V
Test voltage (V)	2.5 kV
Linear electrical resistance (Ω/Km)	conform to IEC 60228 class 5

MECHANICAL CHARACTERISTICS

Bending Radius in Fixed Installation	6 x Ø ext
Bending Radius in Mobile Installation	12 x Ø ext
Max Permissible Temperature on Core	70°C

ENVIRONMENTAL CHARACTERISTIC

Independent lab certification	Yes
CPR classification	Eca
Fire behaviour	IEC 60332-1
Fire Behavior Type	Flame retardant: IEC 60332-1
Fire performance	IEC 60332-1
Fixed Use Temperature	-15°C / +70°C
Mobile Use Temperature	-5°C / +70°C
Component Standard	EN 50525-2-31

ADDITIONAL INFORMATION

Product Packaging	Drum of 1000m
-------------------	---------------