




300x1200 Plaque de plâtre/Troldtekt Support

Codes-articles: 8249045019
EAN: 5703821178969
Remplace: 8249044502



Intérieur
300x1200

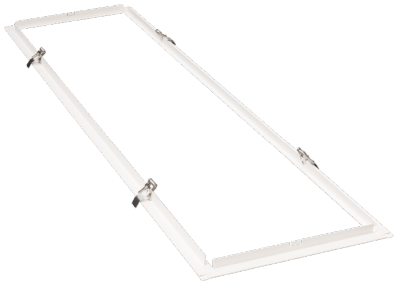

Montage/Connexion

Montage:
Module:

Dimensions

Longueur (mm) L: 1240
Largeur (mm) W: 340
Hauteur (mm) H: 40
Poids (kg) brutto/netto: 1.5 / 1.3

Emballage

Dimensions de l'emballage (mm): 1250 x 370 x 50

Sense Panels & Driver Kits									
	CRI (Ra)	Size (Inch)	BA (°)	SENSE 3000lm DRIVER KIT PHASE DIM (700mA)	SENSE 4000lm DRIVER KIT NON DIM (1000mA)	SENSE 5000lm DRIVER KIT NON DIM (1400mA)	SENSE 3000lm DRIVER KIT DALI (1000mA)	SENSE 4000lm DRIVER KIT DALI (1000mA)	SENSE 5000lm DRIVER KIT DALI (1400mA)
SENSE OPAL 3-4000lm LED 3000K	80	3	110	2750lm UGR<22 27W/128lm/W	4000lm UGR<22 31.2W/127lm/W	x	2750lm UGR<22 27W/128lm/W	4000lm UGR<22 31.2W/127lm/W	x
SENSE OPAL 3-4000lm LED 4000K	80	3	110	2650lm UGR<22 27W/124lm/W	3900lm UGR<22 31.5W/130lm/W	x	2650lm UGR<22 27W/124lm/W	3900lm UGR<22 31.5W/130lm/W	x
SENSE OPAL 5000lm LED 3000K	80	3	110	2650lm UGR<22 27W/124lm/W	3900lm UGR<22 31.5W/130lm/W	5000lm UGR<22 42W/121lm/W	2650lm UGR<22 27W/124lm/W	3900lm UGR<22 31.5W/130lm/W	5000lm UGR<22 42W/121lm/W
SENSE OPAL 5000lm LED 4000K	80	3	110	2750lm UGR<22 31W/131lm/W	4000lm UGR<22 31.5W/130lm/W	5000lm UGR<22 42W/121lm/W	2750lm UGR<22 31W/131lm/W	4000lm UGR<22 31.5W/130lm/W	5000lm UGR<22 42W/121lm/W
SENSE PRISM 3-4000lm LED 3000K	80	3	90	2650lm UGR<17 27W/124lm/W	3900lm UGR<19 31.5W/130lm/W	x	2650lm UGR<17 27W/124lm/W	3900lm UGR<19 31.5W/130lm/W	x
SENSE PRISM 3-4000lm LED 4000K	80	3	90	2750lm UGR<17 27W/131lm/W	4000lm UGR<19 31.5W/130lm/W	x	2750lm UGR<17 27W/131lm/W	4000lm UGR<19 31.5W/130lm/W	x
SENSE PRISM 5000lm LED 3000K	80	3	90	2650lm UGR<17 27W/124lm/W	3750lm UGR<17 31.5W/130lm/W	4000lm UGR<19 42W/121lm/W	2650lm UGR<17 27W/124lm/W	3750lm UGR<17 31.5W/130lm/W	4000lm UGR<19 42W/121lm/W
SENSE PRISM 5000lm LED 4000K	80	3	90	2750lm UGR<17 27W/131lm/W	3750lm UGR<17 31.5W/130lm/W	4000lm UGR<19 42W/121lm/W	2750lm UGR<17 27W/131lm/W	3750lm UGR<17 31.5W/130lm/W	4000lm UGR<19 42W/121lm/W

Notes: efficiency calculations are not driver incl. driver: 7-14% loss depending on driver

