

CRISTO

ENCASTRÉ

IRC > 80 | RG1 | IP20 / IP40 | IK07 | 850°C | L80 B10 : 50 000 H

Corps en acier thermo laqué.
Réflecteur Diffuseur microprisme et opale en retrait


UGR < 19

Driver déporté on / off ou DALI.
Refroidisseur passif.
Fixation au plafond par 2 ressorts.

IRC > 80
Durée de vie :
L80 B10 : 50 000 H

APPLICATION

Bureaux, circulations, hôtellerie.

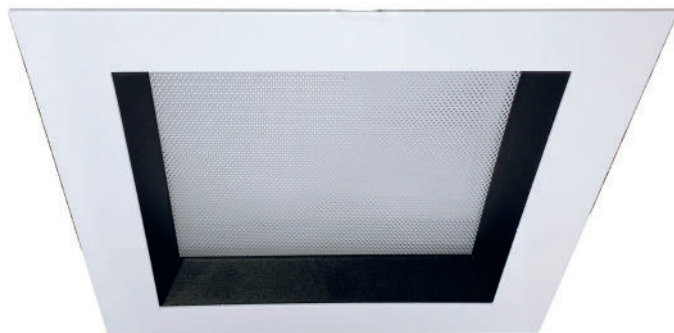

PUISSANCES	KELVIN	FLUX IRC80	LM/W
13 W	3000 K	1045 lm	80 lm/W
	3500 K	1075 lm	83 lm/W
	4000 K	1100 lm	85 lm/W
19 W	3000 K	1470 lm	78 lm/W
	3500 K	1495 lm	79 lm/W
	4000 K	1530 lm	81 lm/W
27 W	3000 K	2003 lm	74 lm/W
	3500 K	2037 lm	75 lm/W
	4000 K	2054 lm	76 lm/W
40 W	3000 K	2910 lm	73 lm/W
	3500 K	3017 lm	75 lm/W
	4000 K	3071 lm	77 lm/W
39 W	3000 K	3524 lm	90 lm/W
	3500 K	3617 lm	93 lm/W
	4000 K	3710 lm	95 lm/W

Normes




Garantie

5 ans


Option

RAL (sur demande)
Code : 9990000
(N° de RAL à confirmer)

De 13 à 27W



39 et 40W



ON/OFF

IRC > 80	KELVIN	CODES BLANC	CODES BLANC/NOIR
13 W	3000 K	7631331	7631332
	4000 K	7631341	7631342
	3500 K	7631351	7631352
19 W	3000 K	7631931	7631932
	4000 K	7631941	7631942
	3500 K	7631951	7631952
27 W	3000 K	7632731	7632732
	4000 K	7632741	7632742
	3500 K	7632751	7632752
40 W	3000 K	7634031	7634032
	4000 K	7634041	7634042
	3500 K	7634051	7634052
39 W	3000 K	7633931	7633932
	4000 K	7633941	7633942
	3500 K	7633951	7633952

DALI

IRC > 80	KELVIN	CODES BLANC	CODES BLANC/NOIR
13 W	3000 K	7641331	7641332
	4000 K	7641341	7641342
	3500 K	7641351	7641352
19 W	3000 K	7641931	7641932
	4000 K	7641941	7641942
	3500 K	7641951	7641952
27 W	3000 K	7642731	7642732
	4000 K	7642741	7642742
	3500 K	7642751	7642752
40 W	3000 K	7644031	7644032
	4000 K	7644041	7644042
	3500 K	7644051	7644052
39 W	3000 K	7643931	7643932
	4000 K	7643941	7643942
	3500 K	7643951	7643952