



DL 06-165/T

- quick mounting
- shock-resistant housing
- high efficiency

The 6W powered speaker is equipped with a 165mm full-range loudspeaker and a 100V transformer with 3 power adjustments. The powder coated metal similar in RAL 9010 guarantees long-term stability. Quick and easy mounting with spring clamps and short tension distance. The speaker is connected by a 2-pin push-clamp.

Special paint of the speaker in 4-digit RAL- or NCS-colour available at extra cost.

This speaker is suitable for a ceiling strength of about 2 – 45 mm. Our specification is primarily related to solid ceilings, for ceilings with soft materials a higher ceiling thicknesses could be necessary. In addition, stronger cables and other fittings may also result in changes of the appropriate setup. With regard to the variety of materials and manufacturers, we recommend to build in a sample of the speaker to match the requirements accurately.

Technical Data

Description	DL 06-165/T
Power	6/3/1,5 W
Frequency Range	97 - 20.000 Hz
Frequency Response	90 - 24.000 Hz
SPL 1W/1m, peak	103 dB
SPL Pmax/1m, peak	110,8 dB
Sensitivity 1W/1m	97,5 dB
Dispersion (-10dB)	180° (h) / 180° (v)
Temperature range	-20 / +80 °C
Dimensions	220x104 mm
Weight (net)	1,13 kg
Colour	RAL 9010
Connector	2-pin push clamp
Mounting	Quick fit mounting
Packing Unit	12
Accessories	F 165
Ceiling Cut-out	195 mm


Please note: Because of many different types of ceiling materials and ceiling strengths we recommend to build in a sample of the speaker to match the requirements accurately.

Product Attributes




Polar Diagrams


Copyright by Four-Audio GmbH & Co KG Licensed to AAC

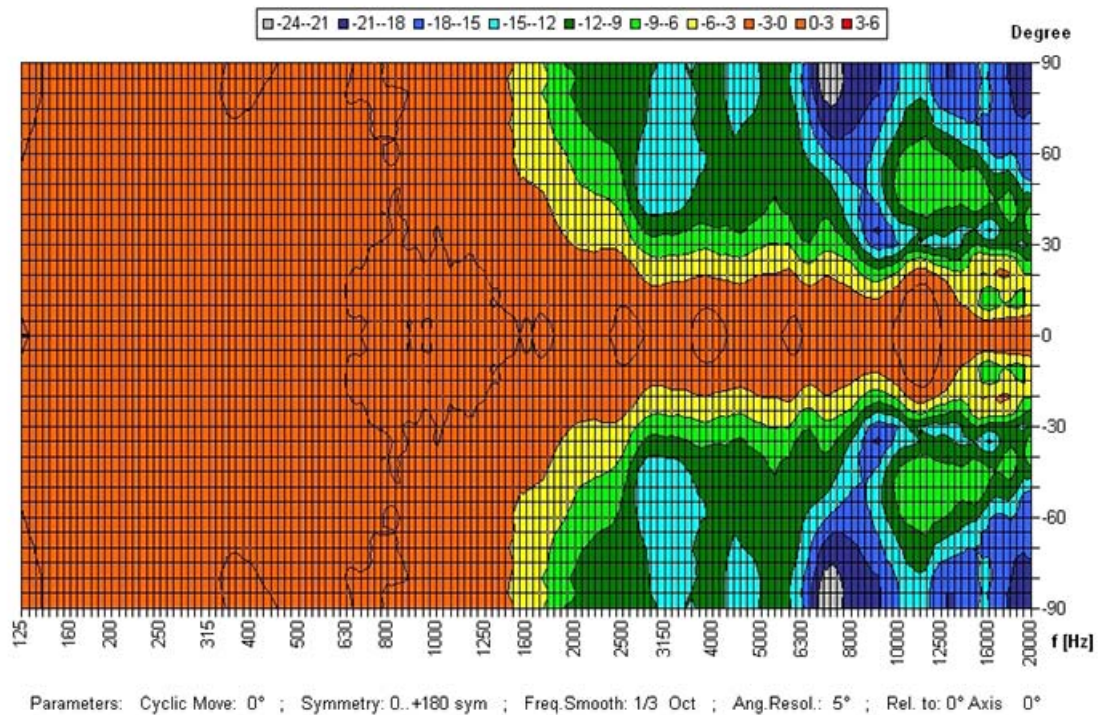

Frequency Response Diagrams

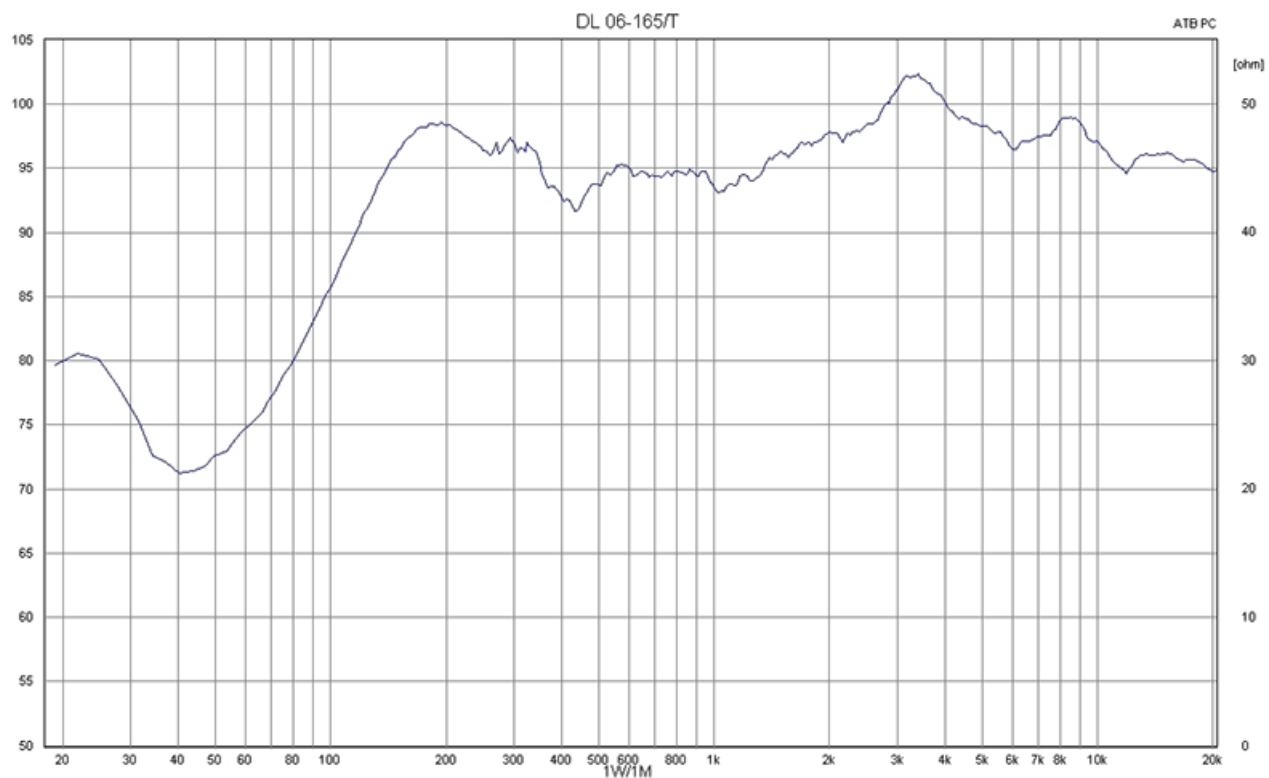

Technical Diagrams

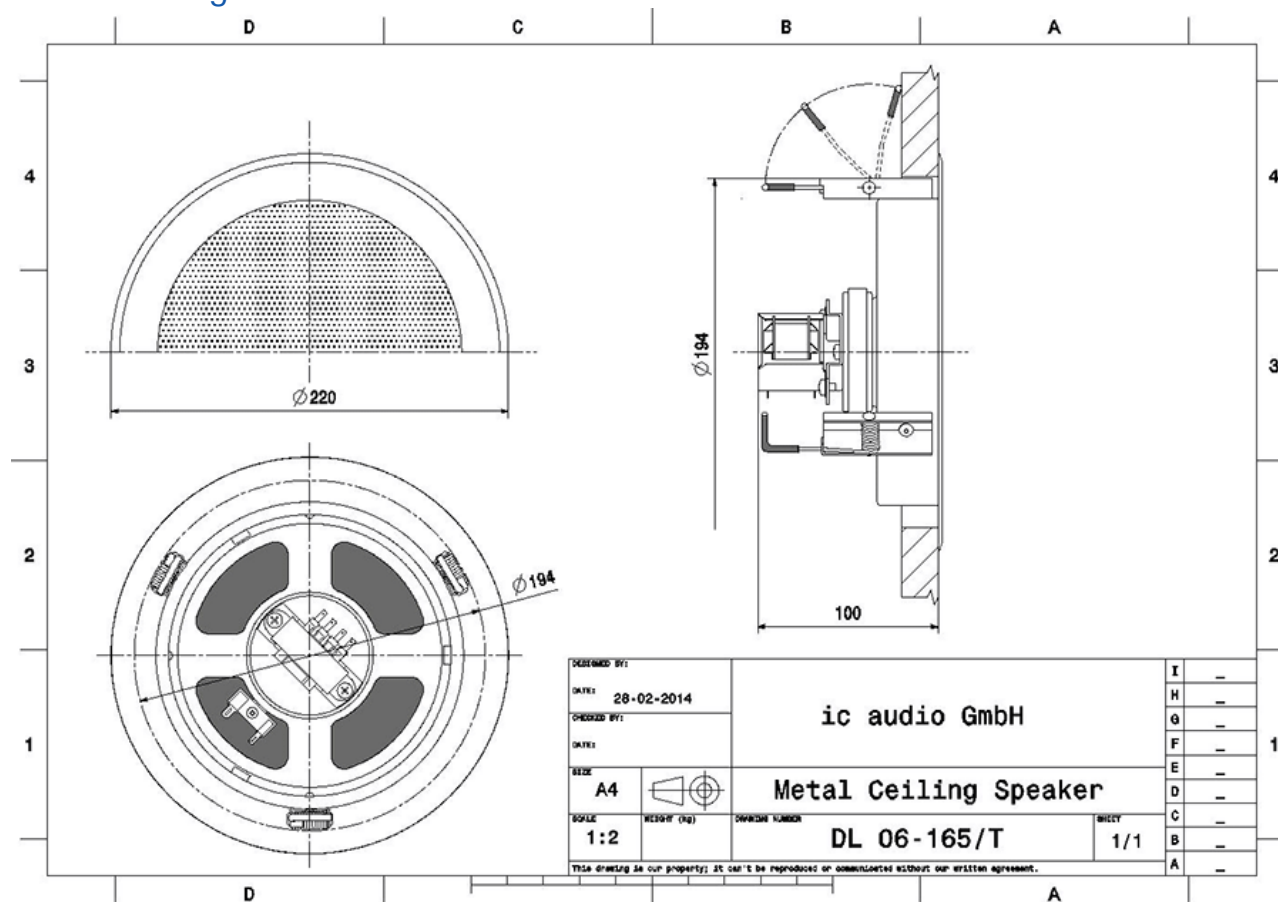

RoHS compliant (2011/65/EU)



Article Nr.:
50622000

Packing Unit:
12

