

WA-S 06-165/T-EN54



- high sound pressure level
- slim-line design
- flexible mounting



EN 54-24:2008

Ref. Nr.: 000-00

ID-Code: XXXX-XX00

ic audio GmbH, Boehringerstraße 14a,
D-68307 Mannheim, Germany

CE-Symbol gemäß Richtlinie 93/68EWG

A uniquely designed ultra-slim wall speaker for limited space and unobtrusive installations. The WA-S 06-165/T-EN54 delivers excellent sound quality with an outstanding look.

The 6W full range 165mm speaker convinces through high-quality design and resilience. The impact-resistant, UV-resistant, ABS plastic housing in white assures enduring stability. It features a magnetically attached grille – discreet and easy maintenance.

Fast and easy installation through the WAGO connector.

The speaker is protected against the risks of environmental influences with protection class IP 21. It is also impregnated against moisture.

Thanks to its flexible mounting positions, 3 orientations are possible:

1. Horizontal alignment on the wall
2. Horizontal alignment between two walls and the ceiling
3. Corner mount

Technical Data (Electrical)

Description	WA-S 06-165/T-EN54
Power	6/3 /1.5 W
Impedance (100V)	1667/3333 /6667 ohm
Frequency Range	210 - 21.800 Hz
Frequency Response	184 - 23.300 Hz
SPL IEC268-5, 1W/1m	92,7 dB
SPL EN54-24, Pmax/4m	88,8 dB
Sensitivity EN54-24, 1W/4m	79,0 dB
Sensitivity EN54-24, 1W/1m	91,0 dB
Dispersion -6dB, 500Hz	180° 180°
Dispersion -6dB, 1KHz	160° 160°
Dispersion -6dB, 2KHz	125° 125°
Dispersion -6dB, 4KHz	89° 89°

Technical Data (Mechanical)

Dimensions	252x182x70 mm
IP Rating	IP21
Weight (net)	0,8 kg
Temperature Range	-10 / +55 C°
Mounting	screws
Connector	WAGO 221 connector
Terminal Diameter	2,3 mm
Maximum Cable Passage	4 mm²
Colour	white


Product Attributes



Technical Drawing





WA-S 06-165/T-EN54

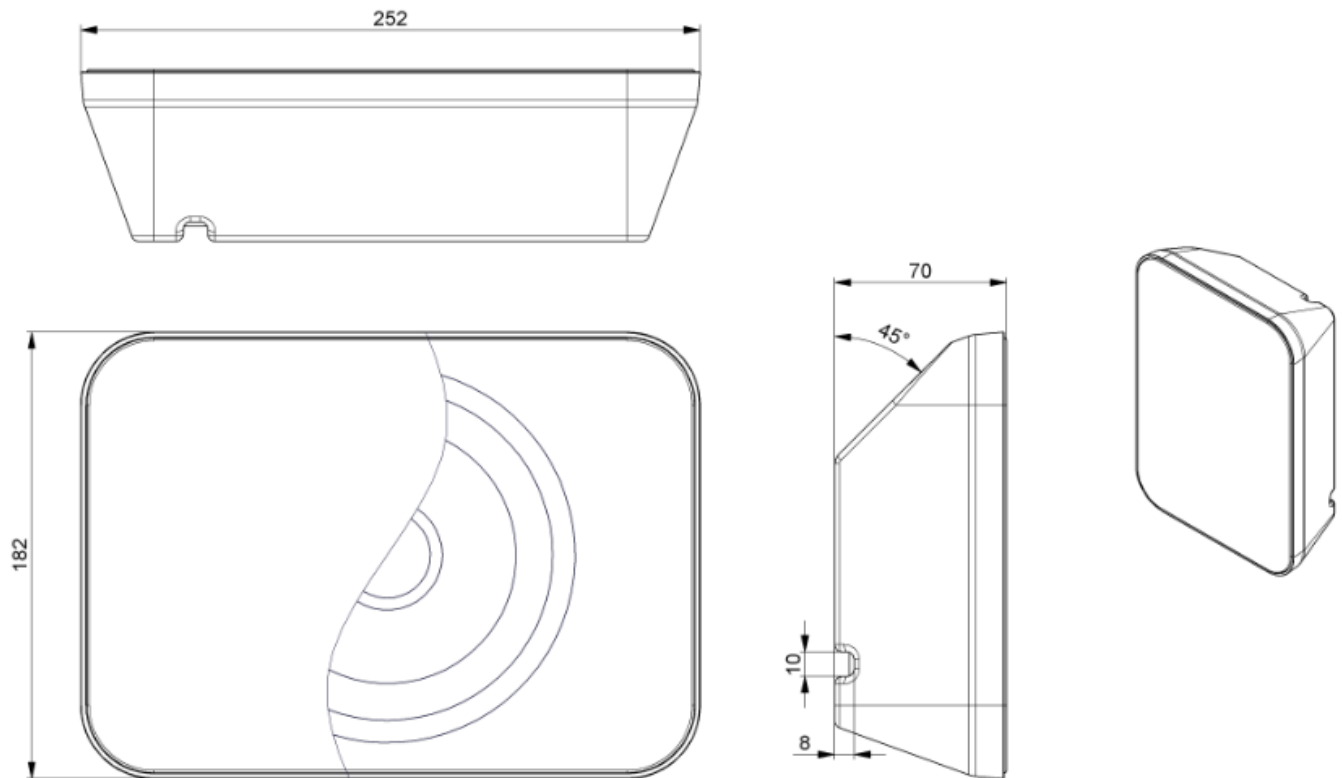


all dimensions are in mm

Frequency Response Diagram

Sensitivity

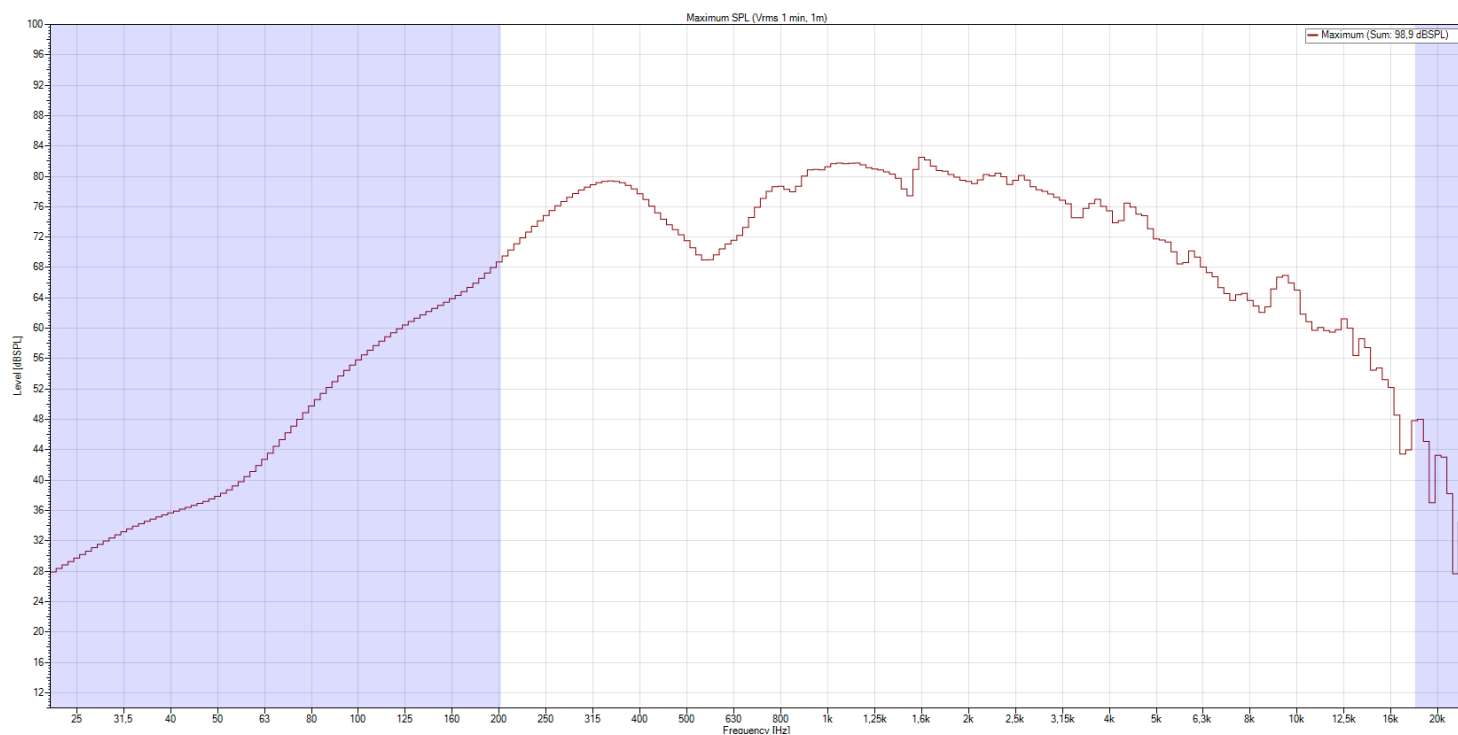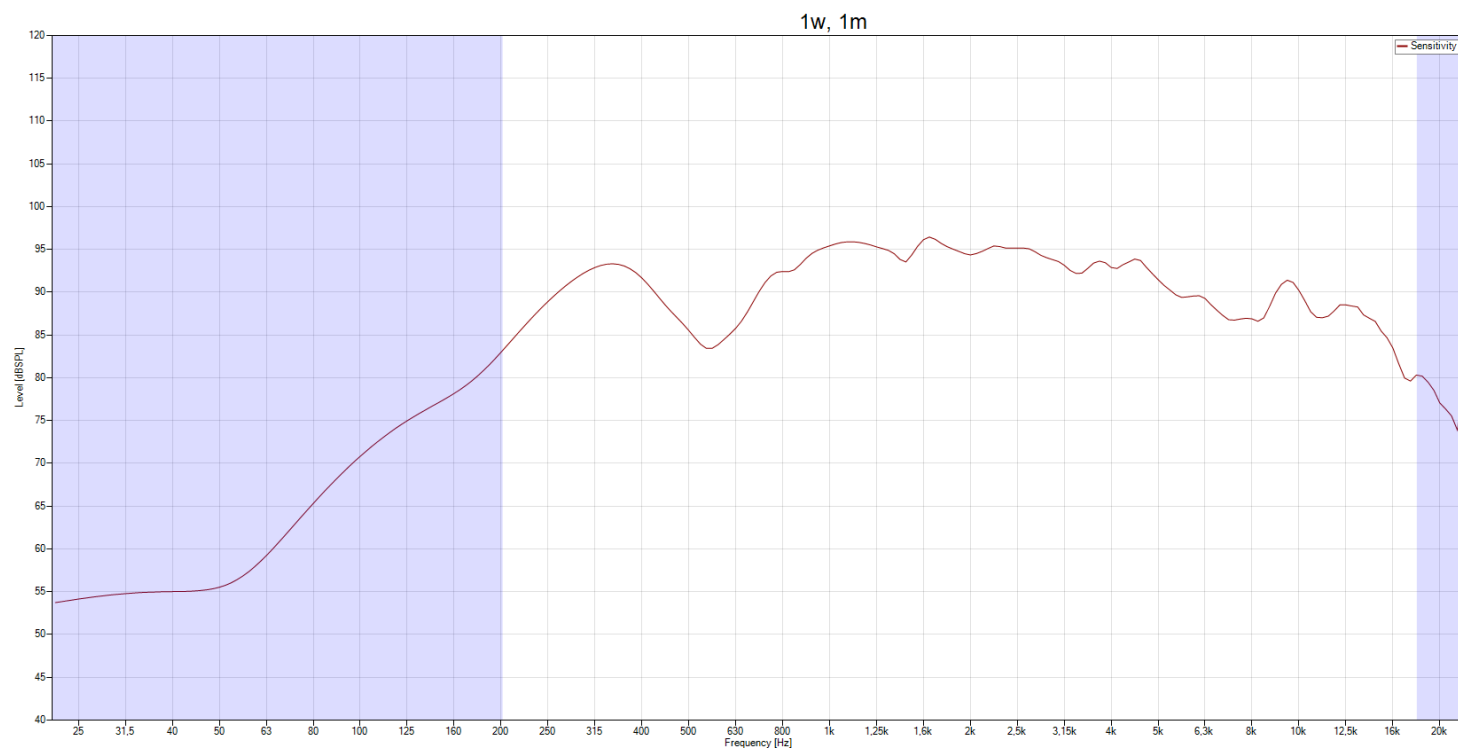


Isobar

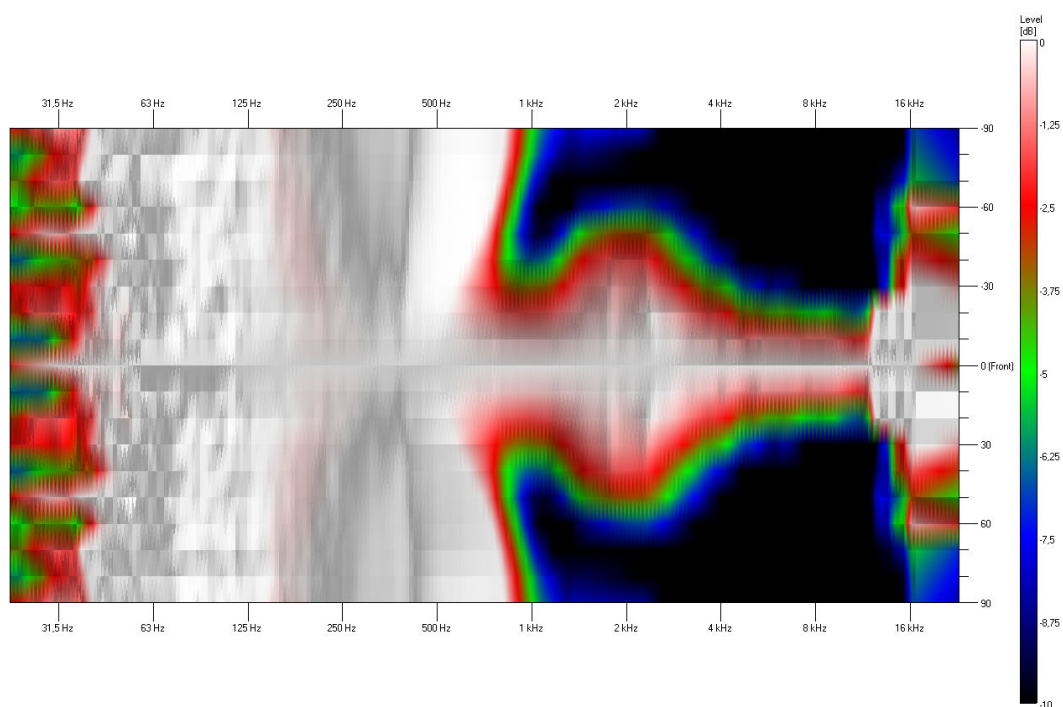


Polar Diagram


Polar Diagram 500Hz

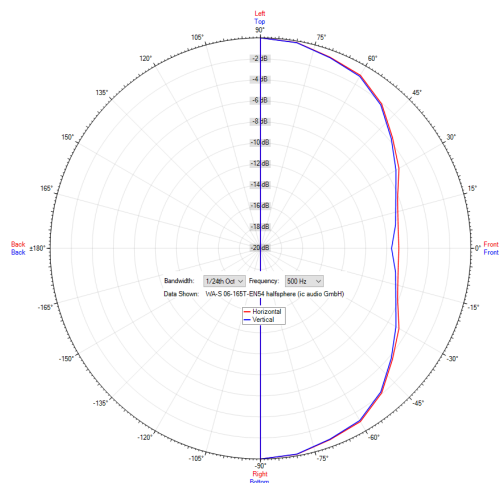


Polar Diagram 4000Hz

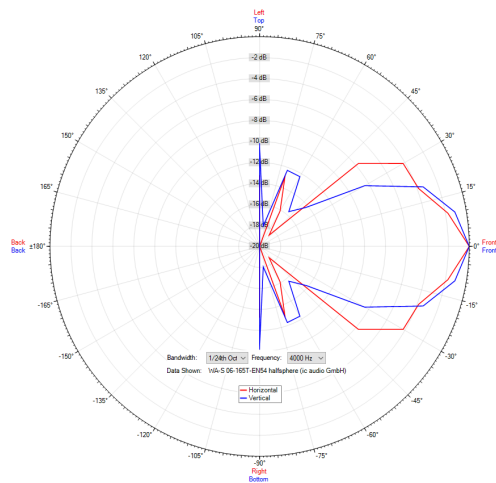


Polar Diagram 1000Hz

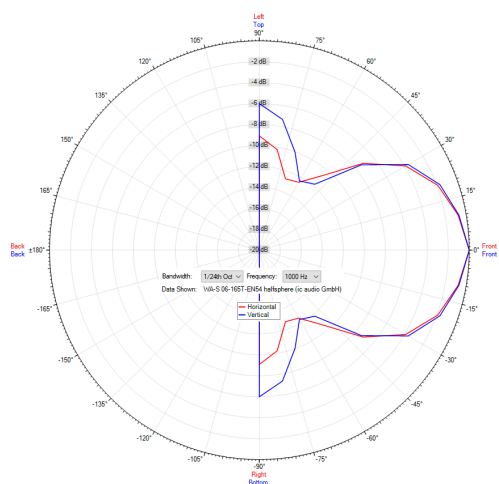

Polar Diagram 8000Hz

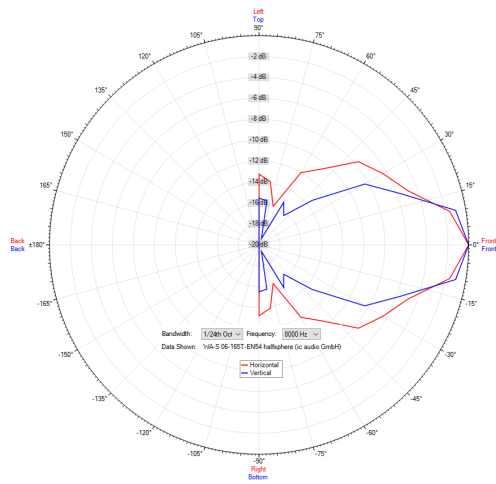

Polar Diagram 2000Hz

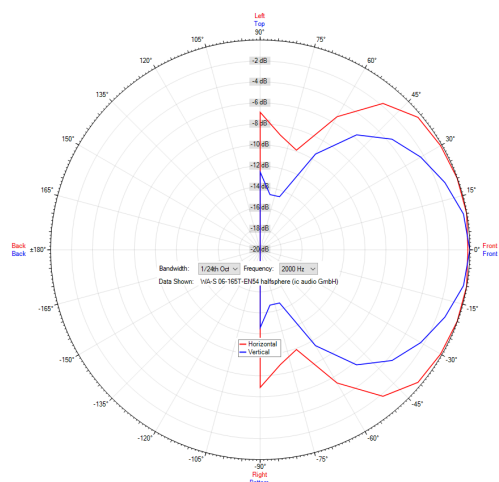

ic audio loudspeakers are tested and classified according to the IEC standard 60529 (degree of protection by enclosure) against the penetration of foreign objects and moisture. The classification is conforming to standards through characterization with a fixed code. This code consists of the letters IP (International Protection) followed by two digits. The first digit indicates the degree of protection against dust and the second digit the degree of protection against water. Please note that the testing of the products has been carried out in laboratory conditions which are not always 100% comparable with the conditions of different installation environments. This protection can be reduced due to normal wear and tear depending on the installation environment.

RoHS compliant (2011/65/EU)

The IP rating specified is based on ic audio test results, not on CNBOP-PIB test results. Certification only verifies the minimum requirements for EN54-24 compliance.



Article Nr.: 20238096
Packing Unit: 12

