
SIEMENS

A5W00049817
A6V11858868

de Montageanleitung
en Mounting instructions

PTC-Kontaktheizelement
PTC-Conductive Heating Element

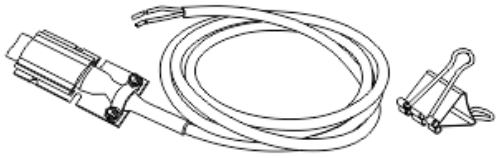

ASR70




de Siehe Datenblatt:
en See data sheet:

MVL661…:	CE2N4714
MVS661..N:	CE2N4717
ASR70:	A6V11858863





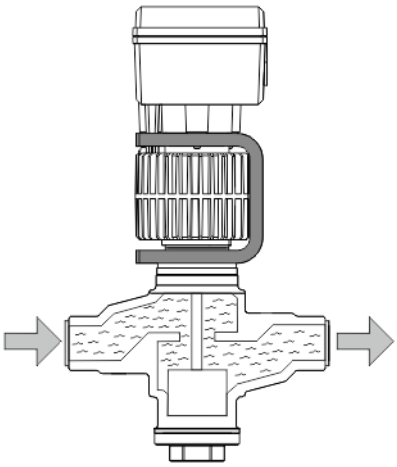


T ≤ 0 °C ▶ ASR70 (S55845-Z241)




de Hinweise zur Montage	**en** Notes on mounting
Stellantrieb von Betriebsspannung trennen.	**Disconnect actuator from power.**
Eine Berührung der erwärmten Teile ohne Schutzmassnahmen hat Verbrennungen zur Folge!	**Do not touch the hot parts without prior protective measures to avoid burns!**
Kältemittelventil nicht isolieren, die Luftzirkulation muss gewährleistet sein.	Do not insulate the refrigerant valve, as air circulation must be ensured!


1

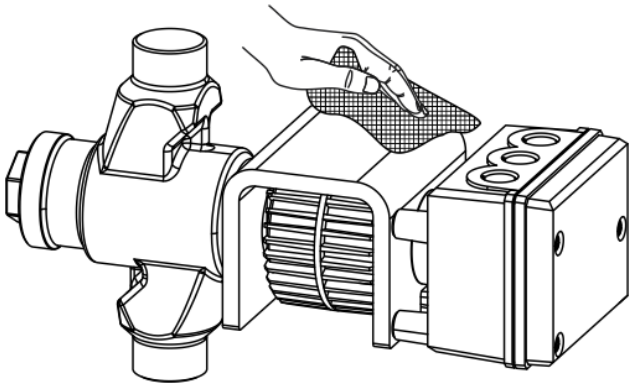


2

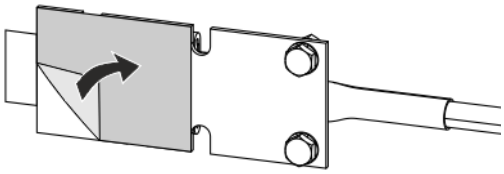


3

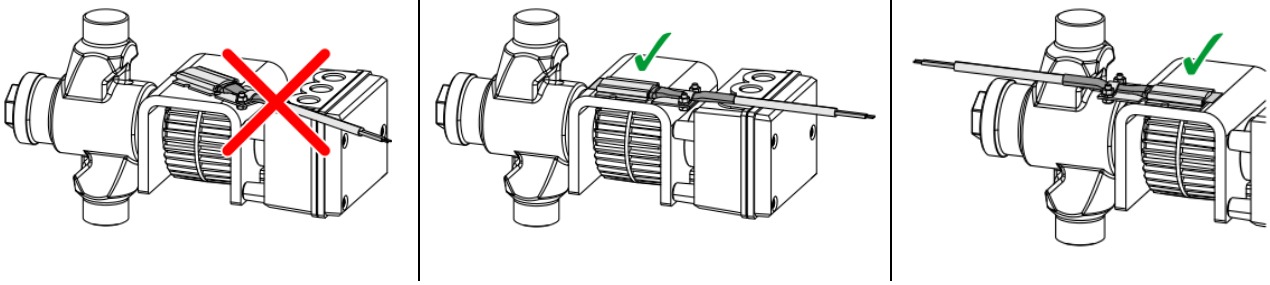


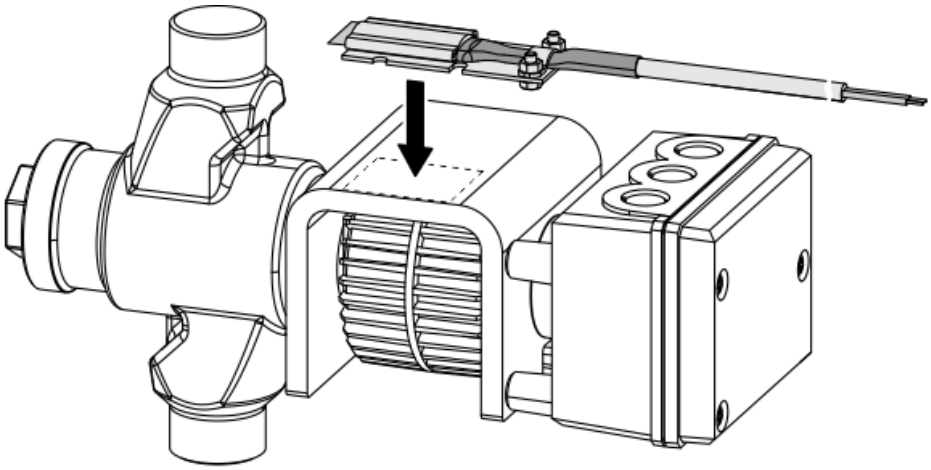


4

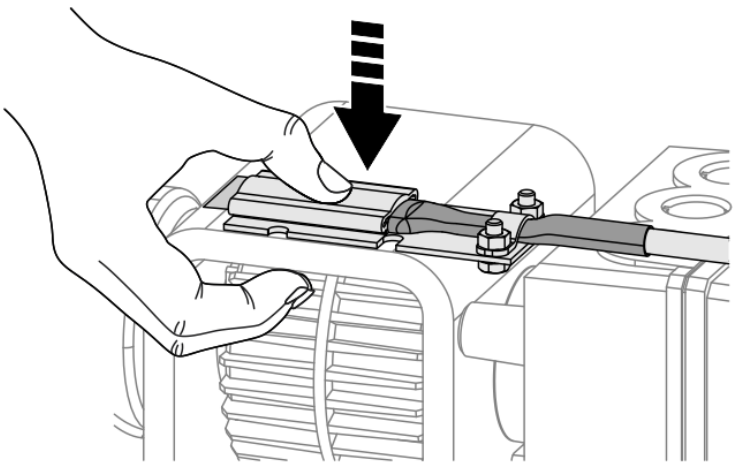


5

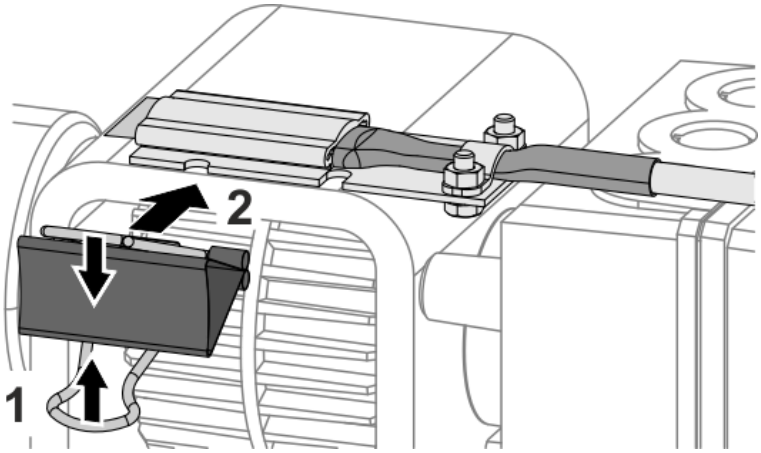


6

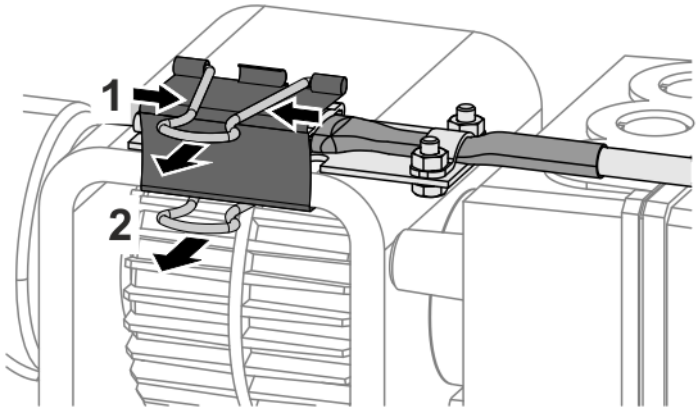

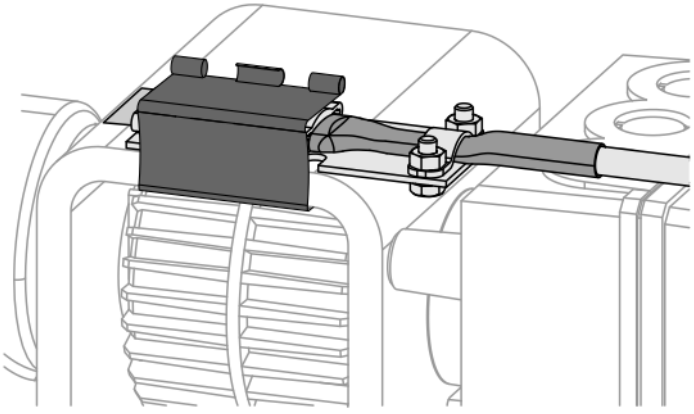

7

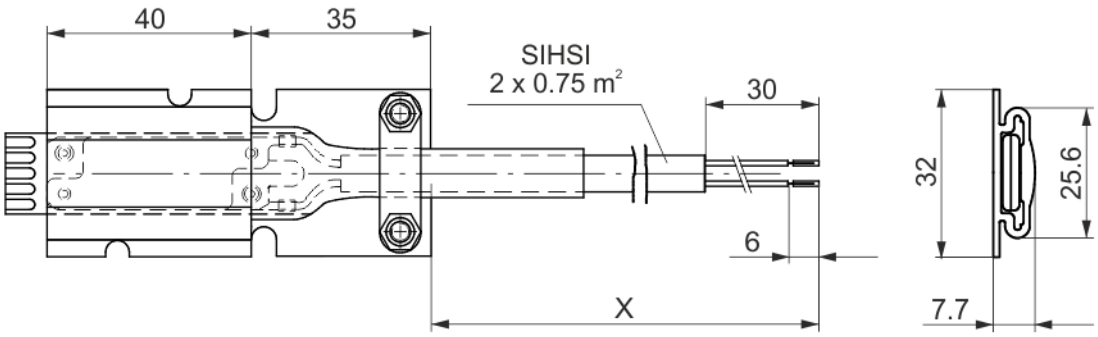

de	Technische Daten		en	Technical Data	
	Betriebsspannung	AC 24 V -10% / +20 % DC 24 V -10% / +20 %		Operating voltage	AC 24 V -10% / +20 % DC 24 V -10% / +20 %
	Einschaltstrom	Max. 5 A		Inrush current	Max. 5 A
	Maximale Leistung	45 W		Maximum Power Output	45 W
	Kabellänge (X)	1,4 m		Cable length (X)	1.4 m
	Aderzahl (blau, braun)	2 x 0,75 mm²		Number of cores (blue, brown)	2 x 0.75 mm²

Issued by
Siemens Switzerland Ltd
Smart Infrastructure
Global Headquarters
Theilerstrasse 1a
6300 Zug
Switzerland
Tel. +41 58-724 24 24
www.siemens.com/buildingtechnologies

© Siemens Switzerland Ltd, 2019
Technical specifications and availability subject to change without notice.