

The **Amortiflex®** line proposes several models of shock absorber designed to materialise locations that may be dangerous, and protect people from impacts and injury.

### Technical specifications

**Material:** Cross linked polyethylene

**Colour:** Yellow and black

**Approval:** Compliant with the NFX 08-003 standard  
(yellow and black models only)

### Mechanical specifications

**Resistance:** Hydrocarbons, adhesives, solvents, steam, heat.


**Operating temperatures:**

Material: From -70°C to +105°C

Adhesive: Up to +75°C


### Size

**A101**




Corner protection.  
Can be used with reference A109, to protect corners.

**G102**




Edge protection.  
Can be used with reference G109 to protect corners.

**I Beam**

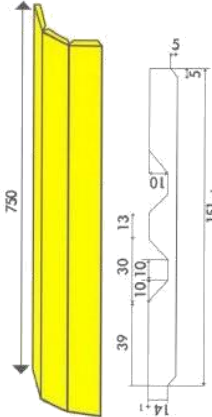


I beam protection.

**SUPGOUT**

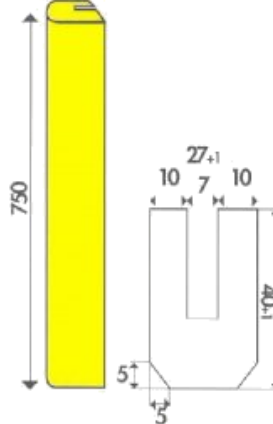

Edge protection.

**PIPE**

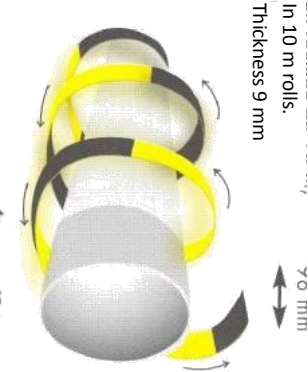

Protection of pipes  
of a diameter greater  
than 150 mm.  
L = 10m  
w = 98 mm  
th = 9 mm

In 10 m rolls.  
Thickness 9 mm

70 mm

**Examples of applications:** Steps, low passages (Crawl space, cellars, basements), beams, corners, pipes, sheet metal, pillars, machines, work sites, etc.