

The **Amortiflex®** line proposes several models of shock absorber designed to materialise locations that may be dangerous, and protect people from impacts and injury.

### Technical specifications

**Material:** Cross linked polyethylene

**Colour:** Yellow and black

**Approval:** Compliant with the NFX 08-003 standard  
(yellow and black models only)

### Mechanical specifications


**Resistance:** Hydrocarbons, adhesives, solvents, steam, heat.

**Operating temperatures:**

Material: From -70°C to +105°C

Adhesive: Up to +75°C

### Size

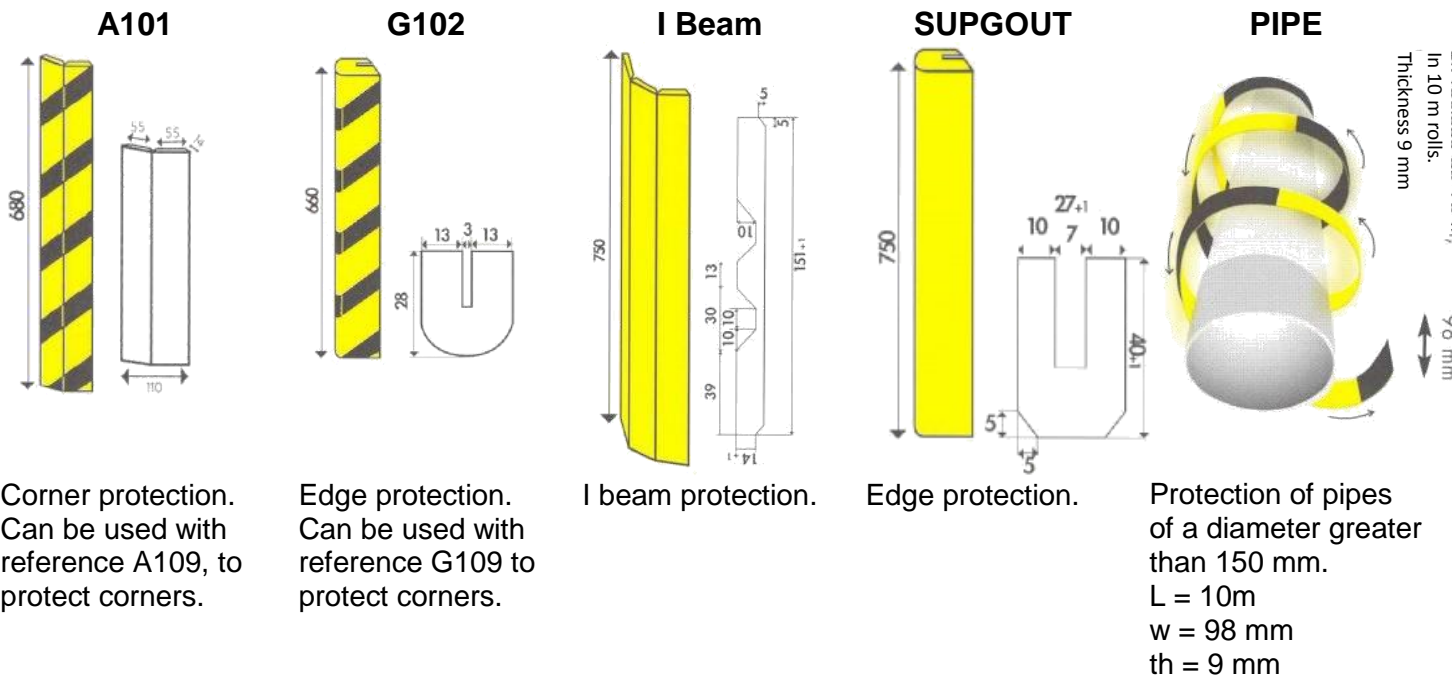

**Examples of applications:** Steps, low passages (Crawl space, cellars, basements), beams, corners, pipes, sheet metal, pillars, machines, work sites, etc.