


50392	4000 K	50 W	110°
h (m)	E _{max} (lx)	d (m)	
1	1751	2,86	
2	438	5,7	
3	195	8,6	
4	109	11,4	
5	70	14,3	

50391	4000 K	30 W	110°
h (m)	E _{max} (lx)	d (m)	
1	906	2,86	
2	226	5,7	
3	101	8,6	
4	57	11,4	
5	36	14,3	

50390	4000 K	20 W	110°
h (m)	E _{max} (lx)	d (m)	
1	631	2,86	
2	158	5,7	
3	70	8,6	

50389	4000 K	10 W	110°
h (m)	E _{max} (lx)	d (m)	
1	340	2,86	
2	85	5,7	
2,5	54	7,1	

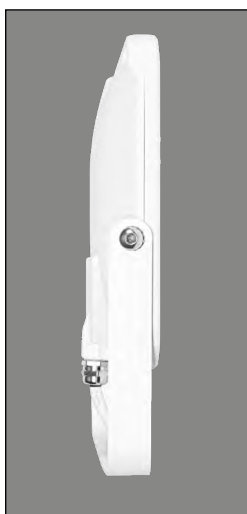


TIGE COMPATIBLE



Pour les WINK 10W, 20W et 30W.
Longueur 400 mm.

Couleur	Code	€ HT
blanc	50149	21,50

Corps aluminium blanc/Verre de protection.
Précâblage H05RN-F 3G 1 mm² long. 0,8 m.



	P (w)	Lumens	Poids (kg)	Code	€ HT
N	10	800	0,43	50389	39,00
N	20	1700	0,86	50390	56,00
N	30	2400	0,87	50391	87,00
N	50	4500	1,75	50392	116,00