
# Photo

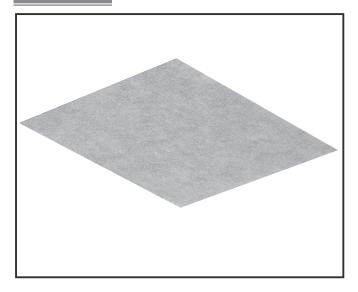

# **Descriptions**

V Blocking Filter with antiviral effect inhibits 99% of adhered virus, and other harmful substances, such as bacteria, mold

Two-layered filter with non-woven fabric and electrostatic filter can effectively capture and remove small particles from the air in your room.

# Applicable Models

#### PAC-SK53KF-E

- PLA-ZM35EA type
- PLA-ZM50EA type
- PLA-ZM60EA type
- PLA-ZM71EA type
- PLA-ZM100EA type
- PLA-ZM125EA type
- PLA-ZM140EA type ■ PLA-M35EA type
- PLA-M50EA type
- PLA-M60EA type
- PLA-M71EA type
- PLA-M100EA type
- PLA-M125EA type
- PLA-M140EA type
- PLA-SM35EA type
- PLA-SM50EA type ■ PLA-SM60EA type
- PLA-SM71EA type
- PLA-SM100EA type
- PLA-SM125EA type ■ PLA-SM140EA type

#### PAC-SK54KF-E

- SLZ-M15FA type
- SLZ-M25FA type
- SLZ-M35FA type ■ SLZ-M50FA type
- SLZ-M60FA type

#### PAC-SK55KF-E

- PCA-M35KA type
- PCA-M50KA type

### PAC-SK56KF-E

- PCA-M60KA type
- PCA-M71KA type

## PAC-SK57KF-E

- PCA-M100KA type
- PCA-M125KA type
- PCA-M140KA type

# Specifications

Model	PAC-SK57KF-E	PAC-SK56KF-E	PAC-SK55KF-E	PAC-SK54KF-E	PAC-SK53KF-E		
Filter size (mm × mm)	753 × 207	A: 433 × 207 B: 753 × 207	433 × 207	308 × 308	507 × 507		
Quantity	2	A × 1, B × 1	1	1	1		
Filter Material	Polyester, Rayon						
Color (Filter)	Light green						
Applicable Models	PCA-M100 KA type PCA-M125 KA type PCA-M140 KA type	PCA-M60 KA type PCA-M71 KA type	PCA-M35KA type PCA-M50KA type	SLZ-M**FA series	PLA-ZM**EA series PLA-M**EA series PLA-SM**EA series		

# How to Use / How to Instal


# Installing the filter

- (1) Open the intake grille.
  - Refer to the installation manuals of 1-way/4-way ceiling-cassette type panels and the ceiling suspended indoor units for details.
- (2) Remove the standard filter [Figure 1] and install the Air cleaning filter by aligning its corners with the inside corners of the intake grille [Figure 2]. Then attach the standard filter to fix the Air cleaning filter.

  • There is no front or back on the Air cleaning filter.

  • Do not layer two or more pieces of Air cleaning filter. Droplets or dripping may result.

  - Do not change the number of air outlet to 2 when using the Air cleaning filter.
  - It cannot be used with a high efficiency filter.
  - It may be discolored depending on the usage environment.

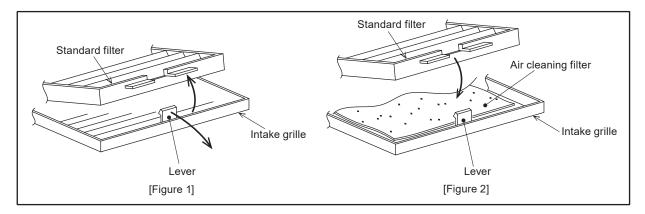

# **Selecting function**

- (1) Increasing the air volume (It is necessary when the Air cleaning filter is installed.) Be sure to make a setting for increasing the air volume as the installation of the Air cleaning filter causes the decrease in air volume, resulting in performance decline and dripping.
- For Mr. Slim
  - Set the Setting no. of Mode no. 10 of Function table from 1 to 2 with the remote controller by referring to the installation manual of the indoor unit.
  - For SLZ\*FA series, set the Setting no. of Mode no.8 of Function table from 2 to 3.

#### <Example> Function table

Mode	Settings	Mode no.	Setting no.	Initial setting
Installed options (high efficiency filter)	Not supported	10	1	0
mistalied options (riight enfolency litter)	Supported	10	2	

#### 3 Cleaning

## Every 3 months:

Remove dirt by a vacuum cleaner.

When dirt cannot be removed by vacuum cleaning:

- Soak the filter in lukewarm water before rinsing it.
- · After washing, dry it well in shade.

### Every year:

· Replace it with a new Air cleaning filter for best performance.

This information is based on REGULATION (EU) No 528/2012 for Europe countries

Model name	Treated Article (Parts name)	Active Substances (CAS No.)	Property	Instruction for Use (Safe handling information)
PAC-SK53KF-E PAC-SK54KF-E PAC-SK55KF-E PAC-SK56KF-E PAC-SK57KF-E	FILTER	Dimethyloctadecyl [3- (trimethoxysilyl) propyl] ammonium chloride (27668-52-6)	Antivirus Antibacterial Antimold	Use this product in line with the instruction manual indications and for the intended purpose only.     Do not put into mouth. Keep away from children.