



ENERG
енергия · ενέργεια

Y IJA
IE IA

 MITSUBISHI
ELECTRIC

Indoor unit


Outdoor unit

ERST20F-VM6E


PUZ-SHWM100VAA



A ++

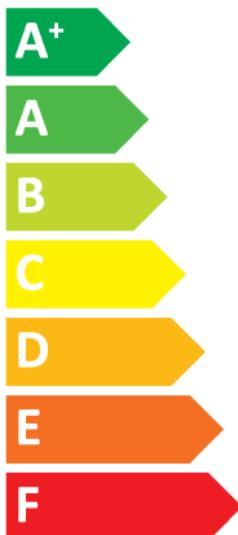

A +

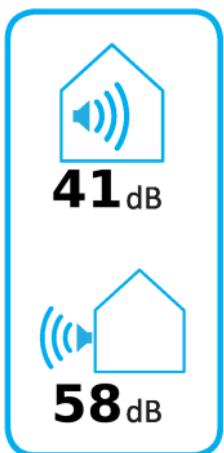



PRODUCT FICHE

Mitsubishi Electric ErP Directive Related Product Information: erp.mitsubisielctric.eu/erp

Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

This information is based on EU regulation No 811/2013 and No 813/2013.

1. SPACE HEATER

1	Outdoor unit		PUZ-SHWM100VAA
2	Indoor unit		ERST20F-VM6E
3	Medium-temperature application		✓
6	Seasonal space heating energy efficiency class		A++
8	Rated heat output under average climate conditions	kW	10
11	Seasonal space heating energy efficiency under average climate conditions	%	138
9	For space heating, annual energy consumption under average climate conditions	kWh	5858
13	Sound power level L _{WA} indoor	dB	41
15	Rated heat output under colder climate conditions	kW	10
16	Rated heat output under warmer climate conditions	kW	10
21	Seasonal space heating energy efficiency under colder climate conditions	%	117
22	Seasonal space heating energy efficiency under warmer climate conditions	%	168
17	For space heating, annual energy consumption under colder climate conditions	kWh	8204
18	For space heating, annual energy consumption under warmer climate conditions	kWh	3121
25	Sound power level L _{WA} outdoor	dB	58

For medium-temperature application

For low-temperature application

2. COMBINATION HEATER

1	Outdoor unit		PUZ-SHWM100VAA
2	Indoor unit		ERST20F-VM6E
3	Medium-temperature application		✓
5	Declared load profile		L
6	Seasonal space heating energy efficiency class		A++
7	Water heating energy efficiency class		A+
8	Rated heat output under average climate conditions	kW	10
9	For space heating, annual energy consumption under average climate conditions	kWh	5858
10	For water heating, annual electricity consumption under average climate conditions	kWh	796
11	Seasonal space heating energy efficiency under average climate conditions	%	138
12	Water heating energy efficiency under average climate conditions	%	137
13	Sound power level L _{WA} indoor	dB	41
14	Work only during off-peak hours		-
15	Rated heat output under colder climate conditions	kW	10
16	Rated heat output under warmer climate conditions	kW	10
17	For space heating, annual energy consumption under colder climate conditions	kWh	8204
18	For space heating, annual energy consumption under warmer climate conditions	kWh	3121
19	For water heating, annual energy consumption under colder climate conditions	kWh	945
20	For water heating, annual energy consumption under warmer climate conditions	kWh	696
21	Seasonal space heating energy efficiency under colder climate conditions	%	117
22	Seasonal space heating energy efficiency under warmer climate conditions	%	168
23	Water heating energy efficiency under colder climate conditions	%	115
24	Water heating energy efficiency under warmer climate conditions	%	158
25	Sound power level L _{WA} outdoor	dB	58

For medium-temperature application

For low-temperature application

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

Model(s):	Outdoor unit:	PUZ-SHWM100VAA	
	Indoor unit:	ERST20F-VM6E	
Air-to-water heat pump:	yes		
Water-to-water heat pump:	no		
Brine-to-water heat pump:	no		
Low-temperature heat pump:	no		
Equipped with a supplementary heater:	yes		
Heat pump combination heater:	yes		
Parameters for	medium-temperature application.		
Parameters for	average climate conditions.		

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	10.0	kW	Seasonal space heating energy efficiency	ηs	138	%
Declared capacity for heating for part load at indoor temperature 20°C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20°C and outdoor temperature Tj			
Tj = - 7°C	Pdh	8.8	kW	Tj = - 7°C	COPd	2.20	
Degradation co-efficient(**)	Cdh	1.00		Tj = + 2°C	COPd	3.40	
Tj = + 2°C	Pdh	5.4	kW	Tj = + 7°C	COPd	4.62	
Degradation co-efficient(**)	Cdh	0.99		Tj = + 12°C	COPd	6.30	
Tj = + 7°C	Pdh	4.8	kW	Tj = bivalent temperature	COPd	1.70	
Degradation co-efficient(**)	Cdh	0.99		Tj = operation limit temperature(***)	COPd	1.70	
Tj = + 12°C	Pdh	2.9	kW	Operation limit temperature	TOL	-30	°C
Degradation co-efficient(**)	Cdh	0.97		Heating water operating limit temperature	WTOL	70	°C
Tj = bivalent temperature	Pdh	10.0	kW	Supplementary heater			
Tj = operation limit temperature(***)	Pdh	10.0	kW	Rated heat output(*)	Psup	0.0	kW
Bivalent temperature	Tbiv	-10	°C	Type of energy input			Electrical
Reference design conditions for space heating	Tdesignh	-10	°C				
Power consumption in modes other than active mode							
Off mode	P _{OFF}	0.015	kW				
Thermostat-off mode	P _{TO}	0.015	kW				
Standby mode	P _{SB}	0.015	kW				
Crankcase heater mode	P _{CK}	0.000	kW				
Other items							
Capacity control		variable		Rated air flow rate, outdoors		2640	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	41 / 58	dB				
Annual energy consumption	Q _{HE}	5858	kWh				
For heat pump combination heater:							
Declared load profile		L		Water heating energy efficiency	ηwh	137	%
Daily electricity consumption	Q _{elec}	3.620	kWh				
Annual electricity consumption	AEC	796	kWh				

Contact details

MITSUBISHI ELECTRIC AIR CONDITIONING SYSTEMS MANUFACTURING TURKEY AND STOCK COMPANY
Yunusemre Mah. Nazif Zorlu Bulvari No:19 Yunusemre - Manisa

The identification and signature of the person empowered to bind the supplier:

Kenichi SAITO
Manager, Quality Assurance Department
TURKEY

• Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

• Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

(***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

This information is based on EU regulation No 811/2013 and No 813/2013.

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

Model(s):	Outdoor unit:	PUZ-SHWM100VAA	
	Indoor unit:	ERST20F-VM6E	
Air-to-water heat pump:	yes		
Water-to-water heat pump:	no		
Brine-to-water heat pump:	no		
Low-temperature heat pump:	no		
Equipped with a supplementary heater:	yes		
Heat pump combination heater:	yes		
Parameters for	low-temperature application.		
Parameters for	average climate conditions.		

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	10.0	kW	Seasonal space heating energy efficiency	ηs	186	%
Declared capacity for heating for part load at indoor temperature 20°C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20°C and outdoor temperature Tj			
Tj = - 7°C	Pdh	8.8	kW	Tj = - 7°C	COPd	3.12	
Degradation co-efficient(**)	Cdh	1.00		Tj = + 2°C	COPd	4.65	
Tj = + 2°C	Pdh	5.4	kW	Tj = + 7°C	COPd	6.00	
Degradation co-efficient(**)	Cdh	0.99		Tj = + 12°C	COPd	6.96	
Tj = + 7°C	Pdh	5.2	kW	Tj = bivalent temperature	COPd	2.51	
Degradation co-efficient(**)	Cdh	0.98		Tj = operation limit temperature(***)	COPd	2.51	
Tj = + 12°C	Pdh	3.2	kW	Operation limit temperature	TOL	-30	°C
Degradation co-efficient(**)	Cdh	0.97		Heating water operating limit temperature	WTOL	70	°C
Tj = bivalent temperature	Pdh	10.0	kW	Supplementary heater			
Tj = operation limit temperature(***)	Pdh	10.0	kW	Rated heat output(*)	Psup	0.0	kW
Bivalent temperature	Tbiv	-10	°C	Type of energy input			Electrical
Reference design conditions for space heating	Tdesignh	-10	°C				
Power consumption in modes other than active mode							
Off mode	P _{OFF}	0.015	kW				
Thermostat-off mode	P _{TO}	0.015	kW				
Standby mode	P _{SB}	0.015	kW				
Crankcase heater mode	P _{CK}	0.000	kW				
Other items							
Capacity control		variable		Rated air flow rate, outdoors		2640	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	41 / 58	dB				
Annual energy consumption	Q _{HE}	4369	kWh				
For heat pump combination heater:							
Declared load profile		L		Water heating energy efficiency	ηwh	137	%
Daily electricity consumption	Q _{elec}	3.620	kWh				
Annual electricity consumption	AEC	796	kWh				

Contact details

MITSUBISHI ELECTRIC AIR CONDITIONING SYSTEMS MANUFACTURING TURKEY AND STOCK COMPANY, Yıldız Mah. Ahmet Nazif Zorlu Bulvari No:19 Yunusemre - Manisa

The identification and signature of the person empowered to bind the supplier:

Kenichi SAITO

Manager, Quality Assurance Department

TURKEY

• Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

• Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

(***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

This information is based on EU regulation No 811/2013 and No 813/2013.

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

Model(s):	Outdoor unit:	PUZ-SHWM100VAA	
	Indoor unit:	ERST20F-VM6E	
Air-to-water heat pump:	yes		
Water-to-water heat pump:	no		
Brine-to-water heat pump:	no		
Low-temperature heat pump:	no		
Equipped with a supplementary heater:	yes		
Heat pump combination heater:	yes		
Parameters for	medium-temperature application.		
Parameters for	colder climate conditions.		

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	10.0	kW	Seasonal space heating energy efficiency	ηs	117	%
Tj = - 7°C	Pdh	6.0	kW	Tj = - 7°C	COPd	2.62	
Degradation co-efficient(**)	Cdh	0.99		Tj = + 2°C	COPd	3.53	
Tj = + 2°C	Pdh	4.0	kW	Tj = + 7°C	COPd	4.59	
Degradation co-efficient(**)	Cdh	0.99		Tj = + 12°C	COPd	6.88	
Tj = + 7°C	Pdh	3.8	kW	Tj = bivalent temperature	COPd	1.58	
Degradation co-efficient(**)	Cdh	0.98		Tj = operation limit temperature(***)	COPd	1.59	
Tj = + 12°C	Pdh	4.4	kW	Tj = - 15°C (if TOL < - 20°C)	COPd	1.58	
Degradation co-efficient(**)	Cdh	0.98		Operation limit temperature	TOL	-30	°C
Tj = bivalent temperature	Pdh	8.4	kW	Heating water operating limit temperature	WTOL	70	°C
Tj = operation limit temperature(***)	Pdh	8.0	kW				
Tj = - 15°C (if TOL < - 20°C)	Pdh	8.2	kW				
Bivalent temperature	Tbiv	-16	°C				
Reference design conditions for space heating	Tdesignh	-22	°C				
Power consumption in modes other than active mode							
Off mode	P _{OFF}	0.015	kW	Supplementary heater			
Thermostat-off mode	P _{TO}	0.015	kW	Rated heat output(*)	P _{sup}	2.0	kW
Standby mode	P _{SB}	0.015	kW	Type of energy input			Electrical
Crankcase heater mode	P _{CK}	0.000	kW				
Other items							
Capacity control		variable					
Sound power level, indoors/outdoors	L _{WA}	41 / 58	dB	Rated air flow rate, outdoors		2640	m ³ /h
Annual energy consumption	Q _{HE}	8204	kWh				
For heat pump combination heater:							
Declared load profile		L		Water heating energy efficiency	η _{wh}	115	%
Daily electricity consumption	Q _{elec}	4.290	kWh				
Annual electricity consumption	AEC	945	kWh				

Contact details

MITSUBISHI ELECTRIC AIR CONDITIONING SYSTEMS MANUFACTURING TURKEY AND STOCK COMPANY
Yunusemre Mah. Nazif Zorlu Bulvari No:19 Yunusemre - Manisa

The identification and signature of the person empowered to bind the supplier:

Kenichi SAITO

Manager, Quality Assurance Department

TURKEY

• Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

• Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

(***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

This information is based on EU regulation No 811/2013 and No 813/2013.

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

Model(s):	Outdoor unit:	PUZ-SHWM100VAA	
	Indoor unit:	ERST20F-VM6E	
Air-to-water heat pump:	yes		
Water-to-water heat pump:	no		
Brine-to-water heat pump:	no		
Low-temperature heat pump:	no		
Equipped with a supplementary heater:	yes		
Heat pump combination heater:	yes		
Parameters for	low-temperature application.		
Parameters for	colder climate conditions.		

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	10.0	kW	Seasonal space heating energy efficiency	ηs	150	%
Tj = - 7°C	Pdh	6.2	kW	Tj = - 7°C	COPd	3.71	
Degradation co-efficient(**)	Cdh	0.99		Tj = + 2°C	COPd	4.38	
Tj = + 2°C	Pdh	4.1	kW	Tj = + 7°C	COPd	5.34	
Degradation co-efficient(**)	Cdh	0.98		Tj = + 12°C	COPd	7.50	
Tj = + 7°C	Pdh	3.9	kW	Tj = bivalent temperature	COPd	2.01	
Degradation co-efficient(**)	Cdh	0.98		Tj = operation limit temperature(***)	COPd	1.57	
Tj = + 12°C	Pdh	4.5	kW	Tj = - 15°C (if TOL < - 20°C)	COPd	2.01	
Degradation co-efficient(**)	Cdh	0.98		Operation limit temperature	TOL	-30	°C
Tj = bivalent temperature	Pdh	8.4	kW	Heating water operating limit temperature	WTOL	70	°C
Tj = operation limit temperature(***)	Pdh	7.7	kW				
Tj = - 15°C (if TOL < - 20°C)	Pdh	8.2	kW				
Bivalent temperature	Tbiv	-16	°C				
Reference design conditions for space heating	Tdesignh	-22	°C				
Power consumption in modes other than active mode							
Off mode	P _{OFF}	0.015	kW	Supplementary heater			
Thermostat-off mode	P _{TO}	0.015	kW	Rated heat output(*)	Psup	2.3	kW
Standby mode	P _{SB}	0.015	kW	Type of energy input			Electrical
Crankcase heater mode	P _{CK}	0.000	kW				
Other items							
Capacity control		variable					
Sound power level, indoors/outdoors	L _{WA}	41 / 58	dB	Rated air flow rate, outdoors		2640	m ³ /h
Annual energy consumption	Q _{HE}	6425	kWh				
For heat pump combination heater:							
Declared load profile		L		Water heating energy efficiency	η _{wh}	115	%
Daily electricity consumption	Q _{elec}	4.290	kWh				
Annual electricity consumption	AEC	945	kWh				

Contact details

MITSUBISHI ELECTRIC AIR CONDITIONING SYSTEMS MANUFACTURING TURKEY AND STOCK COMPANY
Yunusemre Mah. Nazif Zorlu Bulvari No:19 Yunusemre - Manisa

The identification and signature of the person empowered to bind the supplier:

Kenichi SAITO

Manager, Quality Assurance Department

TURKEY

• Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

• Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

(***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

This information is based on EU regulation No 811/2013 and No 813/2013.

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

Model(s):	Outdoor unit:	PUZ-SHWM100VAA	
	Indoor unit:	ERST20F-VM6E	
Air-to-water heat pump:	yes		
Water-to-water heat pump:	no		
Brine-to-water heat pump:	no		
Low-temperature heat pump:	no		
Equipped with a supplementary heater:	yes		
Heat pump combination heater:	yes		
Parameters for	medium-temperature application.		
Parameters for	warmer climate conditions.		

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	10.0	kW	Seasonal space heating energy efficiency	ηs	168	%
Declared capacity for heating for part load at indoor temperature 20°C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20°C and outdoor temperature Tj			
Tj = - 7°C	Pdh	-	kW	Tj = - 7°C	COPd	-	
Degradation co-efficient(**)	Cdh	-		Tj = + 2°C	COPd	2.10	
Tj = + 2°C	Pdh	10.0	kW	Tj = + 7°C	COPd	3.56	
Degradation co-efficient(**)	Cdh	1.00		Tj = + 12°C	COPd	5.77	
Tj = + 7°C	Pdh	6.4	kW	Tj = bivalent temperature	COPd	2.10	
Degradation co-efficient(**)	Cdh	0.99		Tj = operation limit temperature(***)	COPd	2.10	
Tj = + 12°C	Pdh	4.2	kW	Operation limit temperature	TOL	-30	°C
Degradation co-efficient(**)	Cdh	0.98		Heating water operating limit temperature	WTOL	70	°C
Tj = bivalent temperature	Pdh	10.0	kW	Supplementary heater			
Tj = operation limit temperature(***)	Pdh	10.0	kW	Rated heat output(*)	Psup	0.0	kW
Bivalent temperature	Tbiv	2	°C	Type of energy input			Electrical
Reference design conditions for space heating	Tdesignh	2	°C				
Power consumption in modes other than active mode							
Off mode	P _{OFF}	0.015	kW				
Thermostat-off mode	P _{TO}	0.015	kW				
Standby mode	P _{SB}	0.015	kW				
Crankcase heater mode	P _{CK}	0.000	kW				
Other items							
Capacity control		variable		Rated air flow rate, outdoors		2640	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	41 / 58	dB				
Annual energy consumption	Q _{HE}	3121	kWh				
For heat pump combination heater:							
Declared load profile		L		Water heating energy efficiency	ηwh	158	%
Daily electricity consumption	Q _{elec}	3.160	kWh				
Annual electricity consumption	AEC	696	kWh				

Contact details

MITSUBISHI ELECTRIC AIR CONDITIONING SYSTEMS MANUFACTURING TURKEY AND STOCK COMPANY
Yunusemre Mah. Nazif Zorlu Bulvari No:19 Yunusemre - Manisa

The identification and signature of the person empowered to bind the supplier:

Kenichi SAITO

Manager, Quality Assurance Department

TURKEY

• Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

• Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

(***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

This information is based on EU regulation No 811/2013 and No 813/2013.

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

Model(s):	Outdoor unit:	PUZ-SHWM100VAA	
	Indoor unit:	ERST20F-VM6E	
Air-to-water heat pump:	yes		
Water-to-water heat pump:	no		
Brine-to-water heat pump:	no		
Low-temperature heat pump:	no		
Equipped with a supplementary heater:	yes		
Heat pump combination heater:	yes		
Parameters for	low-temperature application.		
Parameters for	warmer climate conditions.		

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	10.0	kW	Seasonal space heating energy efficiency	ηs	245	%
Declared capacity for heating for part load at indoor temperature 20°C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20°C and outdoor temperature Tj			
Tj = - 7°C	Pdh	-	kW	Tj = - 7°C	COPd	-	
Degradation co-efficient(**)	Cdh	-		Tj = + 2°C	COPd	3.50	
Tj = + 2°C	Pdh	10.0	kW	Tj = + 7°C	COPd	5.58	
Degradation co-efficient(**)	Cdh	1.00		Tj = + 12°C	COPd	7.56	
Tj = + 7°C	Pdh	6.4	kW	Tj = bivalent temperature	COPd	3.50	
Degradation co-efficient(**)	Cdh	0.99		Tj = operation limit temperature(***)	COPd	3.50	
Tj = + 12°C	Pdh	4.4	kW	Operation limit temperature	TOL	-30	°C
Degradation co-efficient(**)	Cdh	0.97		Heating water operating limit temperature	WTOL	70	°C
Tj = bivalent temperature	Pdh	10.0	kW	Supplementary heater			
Tj = operation limit temperature(***)	Pdh	10.0	kW	Rated heat output(*)	Psup	0.0	kW
Bivalent temperature	Tbiv	2	°C	Type of energy input			Electrical
Reference design conditions for space heating	Tdesignh	2	°C				
Power consumption in modes other than active mode							
Off mode	P _{OFF}	0.015	kW				
Thermostat-off mode	P _{TO}	0.015	kW				
Standby mode	P _{SB}	0.015	kW				
Crankcase heater mode	P _{CK}	0.000	kW				
Other items							
Capacity control		variable		Rated air flow rate, outdoors		2640	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	41 / 58	dB				
Annual energy consumption	Q _{HE}	2159	kWh				
For heat pump combination heater:							
Declared load profile		L		Water heating energy efficiency	ηwh	158	%
Daily electricity consumption	Q _{elec}	3.160	kWh				
Annual electricity consumption	AEC	696	kWh				

Contact details

MITSUBISHI ELECTRIC AIR CONDITIONING SYSTEMS MANUFACTURING TURKEY AND STOCK COMPANY
Yunusemre Mah. Nazif Zorlu Bulvari No:19 Yunusemre - Manisa

The identification and signature of the person empowered to bind the supplier:

Kenichi SAITO

Manager, Quality Assurance Department

TURKEY

• Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

• Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

(***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

This information is based on EU regulation No 811/2013 and No 813/2013.