




# ENERG

енергия · ενεργεια



Model Indoor unit  
Outdoor unit

**PKA-RP100KAL**  
**PUHZ-ZRP100VKA3**

SEER



**A++**

A+

A

B

C

D

E

**A++**

kW 9,5

SEER 6,1

kWh/annum 539

SCOP



**A++**

A+

A

B

C

D

E

**A+**

kW X 7,8 X

SCOP X 4,1 X

kWh/annum X 2608 X



**65dB**



**69dB**



ENERGIA · ЕНЕРГИЯ · ΕΝΕΡΓΕΙΑ · ENERGIJA · ENERGY · ENERGIE · ENERGI

626/2011

A) Model	B) Indoor unit		PKA-RP100KAL	PKA-RP100KAL	
	C) Outdoor unit	PUHZ-ZRP100VKA3	PUHZ-ZRP100VKA3		
D) Sound power levels on cooling mode	E) Inside	dB	65	65	
	F) Outside	dB	69	69	
G) Refrigerant		R410A GWP 1975 *1			
H) Cooling	SEER		6,1	6,0	
	Energy efficiency class		A++	A+	
	K) Annual electricity consumption *2	kWh/a	539	550	
	L) Design load	kW	9,5	9,5	
M) Heating (Average season)	SCOP		4,1	4,1	
	Energy efficiency class		A+	A+	
	K) Annual electricity consumption *2	kWh/a	2608	2608	
	L) Design load	kW	7,8	7,8	
	N) Declared capacity	P) at reference design temperature	kW	7,8 (-10°C)	7,8 (-10°C)
		R) at bivalent temperature	kW	7,8 (-10°C)	7,8 (-10°C)
		S) at operation limit temperature	kW	5,8 (-20°C)	5,8 (-20°C)
	T) Back up heating capacity	kW	0	0	

	Deutsch	Italiano	Svenska	Polski	Eesti	Malti	Русский
A)	Modell	Modello	Modell	Model	Mudel	Mudell	Модель
B)	Innengerät	Unità interna	Inomhusenhet	Jednostka wewnętrzna	Siseseade	Unità għal ġewwa	Внутренний прибор
C)	Außengerät	Unità esterna	Utomhusenhet	Jednostka zewnętrzna	Välisseade	Unità għal barra	Наружный прибор
D)	Schallleistungspegel im Kühlmodus	Livelli di potenza sonora in modalità di raffreddamento	Bullenivå i nedkylningsläget	Poziom mocy dźwięku w trybie chłodzenia	Müratasemed jahutusrežiimis	Livelli tal-qawwa tal-hsejjes fil-modalità tat-tkessiġ	Значения уровня звуковой мощности в режиме охлаждения
E)	À l'intérieur	Εσωτερικό	Uvníř	Znotraj	Laistigh	Sisäpuoli	Innen
F)	À l'extérieur	Εξωτερικό	Utsida	Na zewnątrz	Väljas	Barra	Außen
G)	Kühlmittel	Refrigerante	Köldmedel	Czynnik chłodniczy	Külmutusagens	Refrigerant	Хладагент

	Deutsch	Italiano	Svenska	Polski	Eesti	Malti	Русский
H)	Kühlen	Raffreddamento	Kyla	Chłodzenie	Jahutus	Tkessiġ	Охлаждение
I)	Energieeffizienzklasse	Classe di efficienza energetica	Energiklass	Klasa energetyczna	Energiatõhususe klass	Klassi tal-effiċjenza fl-użu tal-enerġija	Класс эффективности использования энергии
J)	Jahresstromverbrauch *2	Consumo annuale di energia elettrica *2	Årlig strömförbrukning *2	Zużycie prądu w skali roku *2	Aastane voolutarbimus *2	Konsum annwali tal-elettriku *2	Годовое потребление электроэнергии *2
K)	La斯塔uslegung	Carico nominale	Dimensionerande belastning	Maksymalne obciążenie	Projektteeritud koormus	Tagħbija tad-disinn	Расчетная нагрузка
L)	Charge de calcul	Σχεδιασμός φόρτωσης	Jmenovitě zatížení	Nazivna obremenitev	Lõd deartha	Laskettu kuormitus	Учтормингсbelastning
M)	Chauffage (moyenne saison / saison chaude)	Θέρμανση (Εποχή με μέσες / υψηλότερες θερμοκρασίες)	Topeni (průměrná/teplá sezóna)	Ogrzewanie (Povprečni/toplejši letni čas)	Téamh (Séasúr Meánach / Níos téamh)	Lämmitys (Normaali / Lämpimämpi kausi)	Oppvarming (gjennomsnittlig / varmere årstid)
N)	Capacité déclarée	Δηλωμένη χωρητικότητα	Udåvnad kapacitet	Prijavljena zmogljivost	Toilleadh fógartha	Imoittettu teho	Erklæret kapasitet
O)	à la température de calcul de référence	σε θερμοκρασία σχεδιασμού αναφοράς	při referenční výpočtové teplotě	ob referenčni nazivni temperaturi	ag teocht deartha tagartha	perusmitoitulämpötilassa	при эталонной расчетной температуре
P)	à la température de calcul de référence	σε θερμοκρασία σχεδιασμού αναφοράς	při referenční výpočtové teplotě	ob referenčni nazivni temperaturi	ag teocht deartha tagartha	perusmitoitulämpötilassa	при эталонной расчетной температуре
Q)	à la température de calcul de référence	σε θερμοκρασία σχεδιασμού αναφοράς	při referenční výpočtové teplotě	ob referenčni nazivni temperaturi	ag teocht deartha tagartha	perusmitoitulämpötilassa	при эталонной расчетной температуре
R)	à la température de calcul de référence	σε θερμοκρασία σχεδιασμού αναφοράς	při referenční výpočtové teplotě	ob referenčni nazivni temperaturi	ag teocht deartha tagartha	perusmitoitulämpötilassa	при эталонной расчетной температуре
S)	à la température de calcul de référence	σε θερμοκρασία σχεδιασμού αναφοράς	při referenční výpočtové teplotě	ob referenčni nazivni temperaturi	ag teocht deartha tagartha	perusmitoitulämpötilassa	при эталонной расчетной температуре
T)	à la température de calcul de référence	σε θερμοκρασία σχεδιασμού αναφοράς	při referenční výpočtové teplotě	ob referenčni nazivni temperaturi	ag teocht deartha tagartha	perusmitoitulämpötilassa	при эталонной расчетной температуре



**PRODUCT INFORMATION (\*)**

PACKAGED AIR CONDITIONER	INDOOR MODEL	PKA-RP100KAL
	OUTDOOR MODEL	PUHZ-ZRP100VKA3

Function (indicate if present)	
cooling	Y
heating	Y

If function includes heating: Indicate the heating season the information relates to. Indicated values should relate to one heating season at a time. Include at least the heating season	
Average (mandatory)	Y
Warmer (if designated)	N
Colder (if designated)	N

Item	symbol	value	unit
<b>Design load</b>			
cooling	Pdesignc	9.5	kW
heating/Average	Pdesignh	7.8	kW
heating/Warmer	Pdesignh	x	kW
heating/Colder	Pdesignh	x	kW

Item	symbol	value	unit
<b>Seasonal efficiency</b>			
cooling	SEER	6.1	-
heating/Average	SCOP/A	4.1	-
heating/Warmer	SCOP/W	x	-
heating/Colder	SCOP/C	x	-

Declared capacity for cooling, at indoor temperature 27(19)°C and outdoor temperature Tj			
Tj=35°C	Pdc	9.5	kW
Tj=30°C	Pdc	7.0	kW
Tj=25°C	Pdc	4.5	kW
Tj=20°C	Pdc	4.2	kW

Declared energy efficiency ratio, at indoor temperature 27(19)°C and outdoor temperature Tj			
Tj=35°C	EERd	3.9	-
Tj=30°C	EERd	5.3	-
Tj=25°C	EERd	7.8	-
Tj=20°C	EERd	10.2	-

Declared capacity for heating/Average season, at indoor temperature 20°C and outdoor temperature Tj			
Tj=-7°C	Pdh	6.9	kW
Tj=2°C	Pdh	4.2	kW
Tj=7°C	Pdh	3.1	kW
Tj=12°C	Pdh	3.7	kW
Tj=bivalent temperature	Pdh	7.8	kW
Tj=operating limit	Pdh	5.8	kW

Declared coefficient of performance/Average season, at indoor temperature 20°C and outdoor temperature Tj			
Tj=-7°C	COPd	2.6	-
Tj=2°C	COPd	4.3	-
Tj=7°C	COPd	5.1	-
Tj=12°C	COPd	6.1	-
Tj=bivalent temperature	COPd	2.0	-
Tj=operating limit	COPd	1.5	-

Declared capacity for heating/Warmer season, at indoor temperature 20°C and outdoor temperature Tj			
Tj=2°C	Pdh	x	kW
Tj=7°C	Pdh	x	kW
Tj=12°C	Pdh	x	kW
Tj=bivalent temperature	Pdh	x	kW
Tj=operating limit	Pdh	x	kW

Declared coefficient of performance/Warmer season, at indoor temperature 20°C and outdoor temperature Tj			
Tj=2°C	COPd	x	-
Tj=7°C	COPd	x	-
Tj=12°C	COPd	x	-
Tj=bivalent temperature	COPd	x	-
Tj=operating limit	COPd	x	-

Declared capacity for heating/Colder season, at indoor temperature 20°C and outdoor temperature Tj			
Tj=-7°C	Pdh	x	kW
Tj=2°C	Pdh	x	kW
Tj=7°C	Pdh	x	kW
Tj=12°C	Pdh	x	kW
Tj=bivalent temperature	Pdh	x	kW
Tj=operating limit	Pdh	x	kW
Tj=-15°C	Pdh	x	kW

Declared coefficient of performance/Colder season, at indoor temperature 20°C and outdoor temperature Tj			
Tj=-7°C	COPd	x	-
Tj=2°C	COPd	x	-
Tj=7°C	COPd	x	-
Tj=12°C	COPd	x	-
Tj=bivalent temperature	COPd	x	-
Tj=operating limit	COPd	x	-
Tj=-15°C	COPd	x	-

<b>Bivalent temperature</b>			
heating/Average	Tbiv	-10	°C
heating/Warmer	Tbiv	x	°C
heating/Colder	Tbiv	x	°C

<b>Operating limit temperature</b>			
heating/Average	Tol	-20	°C
heating/Warmer	Tol	x	°C
heating/Colder	Tol	x	°C

<b>Cycling interval capacity</b>			
for cooling	Pcycc	x	kW
for heating	Pcyh	x	kW
Degradation co-efficient cooling	Cdc	0.25	-

<b>Cycling interval efficiency</b>			
for cooling	EERcyc	x	-
for heating	COPcyc	x	-
Degradation co-efficient heating	Cdh	0.25	-

<b>Electric power input in power modes other than 'active mode'</b>			
off mode	POFF	15	W
standby mode	PSB	15	W
thermostat - off mode	PTO(c/h)	80/40	W
crankcase heater mode	PCK	0	W

<b>Annual electricity consumption</b>			
cooling	QCE	539	kWh/a
heating/Average	QHE	2608	kWh/a
heating/Warmer	QHE	x	kWh/a
heating/Colder	QHE	x	kWh/a

<b>Capacity control (indicate one of three options)</b>	
fixed	N
staged	N
variable	Y

<b>Other items</b>			
Sound power level (indoor/outdoor)	LWA	65/69	dB(A)
Global warming potential	GWP	1975	kgCO2eq
Rated air flow (indoor/outdoor)	-	1560/6600	m3/h

Contact details for obtaining more information	Name and address of the manufacturer or of its authorized representative.
--	---

(\*) This information is based on the "product information requirement" in COMMISSION REGULATION (EU) No206/2012.

<b>TECHNICAL DOCUMENTATION <sup>(1)</sup></b>
---

PACKAGED AIR CONDITIONER	INDOOR MODEL	PKA-RP100KAL	365H1170W295D (mm)
	OUTDOOR MODEL	PUHZ-ZRP100VKA3	1338H1050W330D (mm)

Function	
cooling	Y
heating	Y


The heating season	
Average (mandatory)	Y
Warmer (if designated)	N
Colder (if designated)	N

Capacity control	
fixed	N
staged	N
variable	Y

Item	symbol	value	unit
Seasonal efficiency <sup>(2)</sup>			
cooling	SEER	6.1	-
heating/Average	SCOP/A	4.1	-
heating/Warmer	SCOP/W	x	-
heating/Colder	SCOP/C	x	-

Energy efficiency class			
cooling	SEER	A++	-
heating/Average	SCOP/A	A+	-
heating/Warmer	SCOP/W	x	-
heating/Colder	SCOP/C	x	-

Other items			
Sound power level (indoor/outdoor)	LWA	65/69	dB(A)
Refrigerant	-	R410A	-
Global warming potential	GWP	1975	kgCO <sub>2</sub> eq.

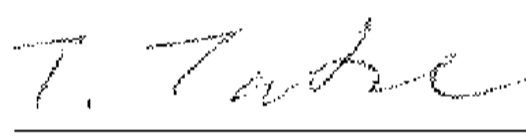identification and signature of the person empowered to bind the supplier	 <hr style="width: 20%; margin: 0 auto;"/> Takashi Tanabe Manager, Quality Assurance Department Mitsubishi Electric Air Conditioning Systems Europe Ltd.
---	--

(1) This information is based on COMMISSION DELEGATED REGULATION (EU)No626/2011.

(2) SEER/SCOP values are measured based on FprEN 14825:2011: Testing and rating at part load conditions and calculation of seasonal performance.