



Oil Nozzles

HR/SR



Description

Oil nozzles types HR and SR are designed for domestic high-pressure oil burners where round-shaped nozzle head are requested. They are available with 3 different spray angles and sizes from 0.3 to 1.00 USgal/h. HR and SR nozzles are equipped with sintered bronze filter and have the same performances as the corresponding sizes of OD-nozzles.

Features & Benefits

- Light and heavy oil
- EN nozzles from 1.46 to 3.72 kg/h
- Standard nozzles 0.30 and 0.35 USgal/h
- 100% test of capacity and performance in accordance with EN

Applications

- Designed for domestic high-pressure oil burners where round-shaped nozzle heads are requested.

Ordering

Product code numbers

Product group	Type	Spray angle [°]	Capacity [USgal/h]	Code number
Oil Nozzles	SR	45	0.65	030F5864
Oil Nozzles	SR	45	0.75	030F5866
Oil Nozzles	SR	45	0.40	030F5904
Oil Nozzles	SR	45	0.45	030F5906
Oil Nozzles	SR	45	0.50	030F5908
Oil Nozzles	SR	45	0.55	030F5910
Oil Nozzles	SR	45	0.60	030F5912
Oil Nozzles	SR	45	0.65	030F5914
Oil Nozzles	SR	45	0.75	030F5916
Oil Nozzles	SR	45	0.85	030F5918
Oil Nozzles	SR	45	1.00	030F5920
Oil Nozzles	SR	60	0.75	030F7816
Oil Nozzles	SR	60	0.50	030F7858
Oil Nozzles	SR	60	0.55	030F7860
Oil Nozzles	SR	60	0.60	030F7862
Oil Nozzles	SR	60	0.65	030F7864
Oil Nozzles	SR	60	0.40	030F7904
Oil Nozzles	SR	60	0.45	030F7906
Oil Nozzles	SR	60	0.50	030F7908
Oil Nozzles	SR	60	0.55	030F7910
Oil Nozzles	SR	60	0.60	030F7912
Oil Nozzles	SR	60	0.65	030F7914
Oil Nozzles	SR	60	0.75	030F7916
Oil Nozzles	SR	60	0.85	030F7918
Oil Nozzles	SR	60	1.00	030F7920
Oil Nozzles	SR	80	0.30	030F9852
Oil Nozzles	SR	80	0.40	030F9854
Oil Nozzles	SR	80	0.30	030F9902
Oil Nozzles	SR	80	0.35	030F9903
Oil Nozzles	SR	80	0.40	030F9904
Oil Nozzles	SR	80	0.45	030F9906
Oil Nozzles	SR	80	0.50	030F9908
Oil Nozzles	SR	80	0.55	030F9910
Oil Nozzles	SR	80	0.60	030F9912
Oil Nozzles	SR	80	0.65	030F9914
Oil Nozzles	SR	80	0.75	030F9916
Oil Nozzles	SR	80	0.17	030F9987
Oil Nozzles	HR	80	0.42	030H0855
Oil Nozzles	HR	80	0.42	030H0905
Oil Nozzles	HR	45	0.40	030H5904
Oil Nozzles	HR	45	0.50	030H5908
Oil Nozzles	HR	60	0.45	030H7856
Oil Nozzles	HR	60	0.55	030H7860
Oil Nozzles	HR	60	0.40	030H7904

Oil Nozzles	HR	60	0.45	030H7906
Oil Nozzles	HR	60	0.50	030H7908
Oil Nozzles	HR	60	0.55	030H7910
Oil Nozzles	HR	60	0.60	030H7912
Oil Nozzles	HR	60	0.65	030H7914
Oil Nozzles	HR	60	0.75	030H7916
Oil Nozzles	HR	60	1.00	030H7920
Oil Nozzles	HR	60	1.35	030H7926
Oil Nozzles	HR	80	0.35	030H9853
Oil Nozzles	HR	80	0.40	030H9854
Oil Nozzles	HR	80	0.42	030H9855
Oil Nozzles	HR	80	0.45	030H9856
Oil Nozzles	HR	80	0.65	030H9864
Oil Nozzles	HR	80	0.85	030H9868
Oil Nozzles	HR	80	0.35	030H9903
Oil Nozzles	HR	80	0.40	030H9904
Oil Nozzles	HR	80	0.42	030H9905
Oil Nozzles	HR	80	0.45	030H9906
Oil Nozzles	HR	80	0.50	030H9908
Oil Nozzles	HR	80	0.55	030H9910
Oil Nozzles	HR	80	0.65	030H9914
Oil Nozzles	HR	80	0.75	030H9916
Oil Nozzles	HR	80	0.85	030H9918
Oil Nozzles	HR	80	1.00	030H9920

Identification

The EN nozzles 1.46 to 3.72 are marked with this information. Other nozzles are without EN marking.




Stamped on the flats:

2.37	EN specified capacity (kg/h)
EN 80° II	Spray angle & Angle index (according to EN 293/EN 299)
EN specification point	1000 kPa (10 bar), 3.4 cSt., 840 kg/m ³ Capacity tolerance: ± 4%
	Serial number for internal use
0.60	Reference capacity (USgal/h)
60° SR	Spray angle & pattern (HR = Hollow, SR = Solid)
Reference specification point	700 kPa (7 bar), 3.4 cSt., 820 kg/m ³

Functions

Operation

Spray angle and spray pattern

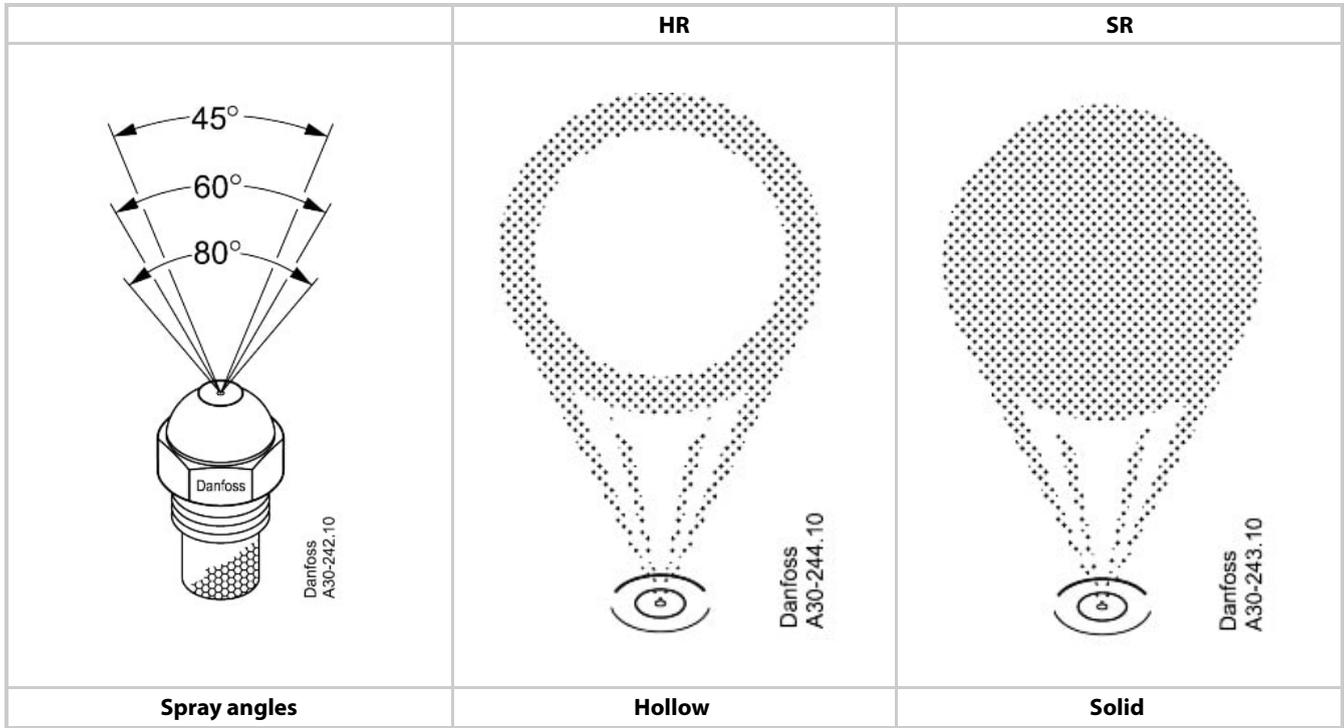

Product details


General data

Reference capacity [USgal/h]	Spray angle / patterns				Specified capacity [kg/h]
	45°	60°		80°	
0.30				SR*	1.15
0.35				HR* SR*	1.35
0.40	SR	SR		HR SR	1.46
0.45	SR	HR	SR	HR SR	1.66
0.50	SR	HR	SR	HR SR	1.87
0.55	SR	HR	SR	HR SR	2.11
0.60	SR	HR	SR	SR	2.37
0.65	SR	HR	SR	SR	2.67
0.75	SR	HR	SR	HR SR	2.94
0.85	SR	SR			3.31
1.00	SR	SR		HR	3.72

* not EN nozzles

Design


1. Filter
2. O-ring holder
3. Nozzle housing
4. Nozzle cone
5. Orifice disc

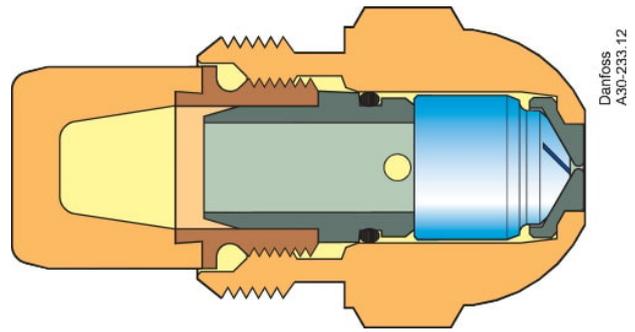


Capacity

Filters


Capacity 0.30 to 0.35 USgal/h: 30 μ m sintered bronze

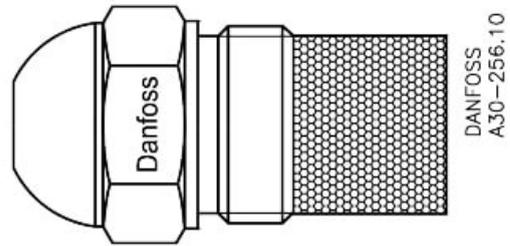

Capacity 0.40 to 1.00 USgal/h: 45 μ m sintered bronze

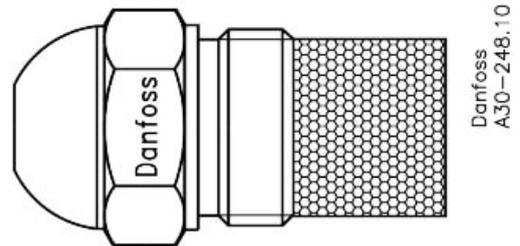

Dimensions & weights

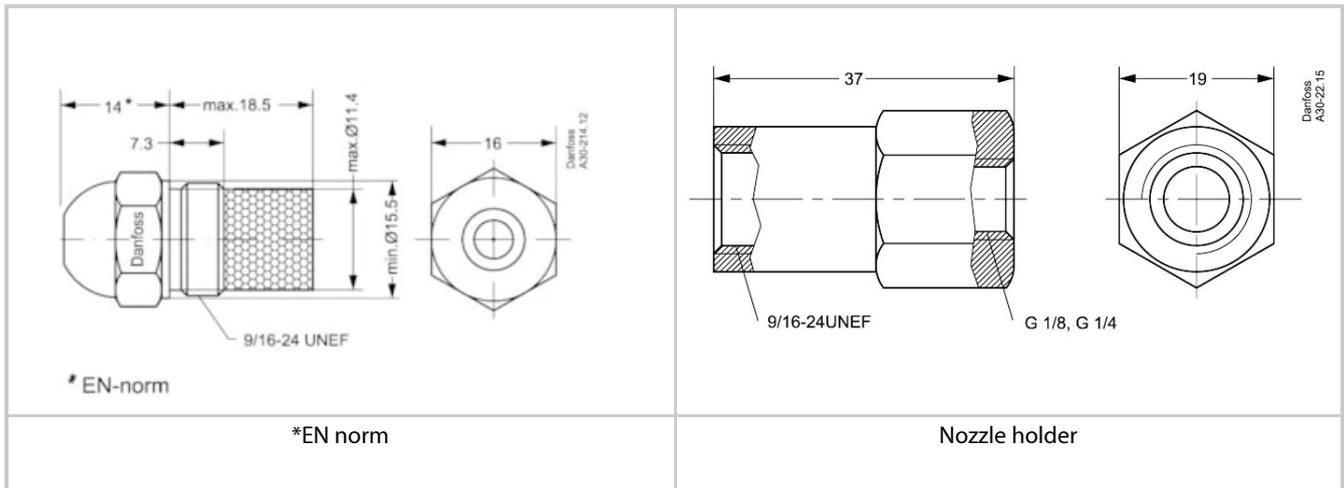

*EN norm

Nozzle holder

Weight	Nozzles type HR and SR	
	Gross weight	0.035 kg
	Net weight	0.033 kg
	Volume	0.025 Liter

Installation

Tightening torques

Recommended tightening torque	15 to 20 Nm (1.5 to 2.0 kpm)
Max. tightening torque	25 Nm (2.5 kpm)

Certificates, declarations and approvals

The list contains all certificates, declarations, and approvals for this product type. Individual code number may have some or all of these approvals, and certain local approvals may not appear on the list.

When you click on the link you will be directed to the latest version of the 'Declaration of Conformity'. Products developed and sold before this date of issue conform to the directives/standards in force at the time of their sale.

Approval type	Title	Certification body	Approval topic
Manufacturer's Declaration	Danfoss MD 030CEN.01	Danfoss	EU RoHS
Manufacturer's Declaration	Danfoss MD 030BHF.01	Danfoss	EU RoHS
Export Control Declaration	Oil Nozzles	Danfoss	

Contact details

Online support

Danfoss offers a wide range of support along with our products, including digital information, software, mobile apps and expert guidance. See the possibilities below.



The Danfoss Design center

Discover the Design Center, our advanced digital platform that streamlines product selection. With integrated tools and enhanced type pages, it's simpler than ever to access product information and documentation, and to select the right products. Check the availability of Danfoss products at partner locations and enjoy seamless transitions from selection to purchase with our basket-to-basket functionality. Whether you're buying from our distributors or directly from the Product Store, the Design Center simplifies your experience. Learn more at: designcenter.danfoss.com.



The Danfoss product store

The Danfoss Products Store is a one-stop shop available 24/7 for our customers, no matter where you are in the world or what area of industry you work in. Browse our catalog, check product details and documentation, view your prices and product availability, and quickly finalize your purchase. Start browsing at: store.danfoss.com.



Danfoss Partner Portal/Product Data tool

Designed to support you with easy access to product data extracts, essential resources, tools, and information. The Partner Portal provides a centralized hub for product documentation, training materials, marketing assets, and technical support, ensuring you have everything you need to succeed and grow your business with Danfoss. The Partner Portal is available 24/7 at: partner.danfoss.com and is ready to support your business.



Find technical documentation

Find technical documentation you need to get your project up running. Get direct access to our official collection of data sheets, certificates and declarations, manuals and guides, 3D models and drawings, case stories, brochures, and much more. Start searching now at: documentation.danfoss.com.



Danfoss Learning

Danfoss Learning is a free online learning platform. It features courses and materials specifically designed to help engineers, installers, service technicians, and wholesalers better understand the products, applications industry topics, and trends that will help you do your job better. Find your local Danfoss website here: learning.danfoss.com.



Get local information and support

Local Danfoss websites are the main sources for help and information about our company and products. Find product availability, get the latest regional news, or connect with a nearby expert - all in your own language. Find your local Danfoss website here: danfoss.com.

Danfoss A/S

Climate Solutions . danfoss.com . +45 7488 2222

Any information, including, but not limited to information on selection of product, its application or use, product design, weight, dimensions, capacity or any other technical data in product manuals, catalogues description, advertisements, etc. and whether made available in writing, orally, electronically, online or via download, shall be considered informative, and is only binding if and to the extent, explicit reference is made in a quotation or order confirmation. Danfoss cannot accept any responsibility for possible errors in catalogues, brochures, videos and other material. Danfoss reserves the right to alter its products without notice. This also applies to products ordered but not delivered provided that such alterations can be made without changes to form, fit or function of the products. All trademarks in this material are property of Danfoss A/S or Danfoss group companies. Danfoss and the Danfoss logo are trademarks of Danfoss A/S. All rights reserved.