



Operating Guide

AB-QM DN 10-32 / 73693780


AB-QM DN 10-32

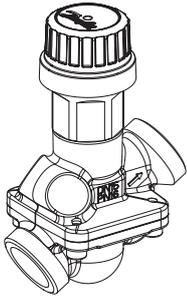


TWA-Z +
AB-QM DN 10-32




ABNM +
AB-QM DN 10-32

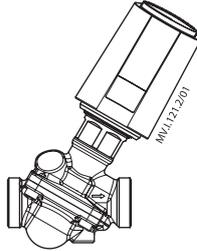




AMV/AME 110 NL, 120 NL +
AB-QM DN 10-32

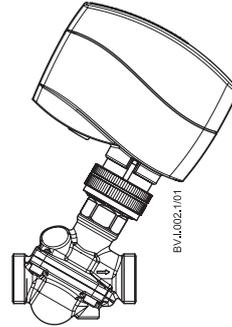

NovoCon™ +
AB-QM DN 10-32



Installation

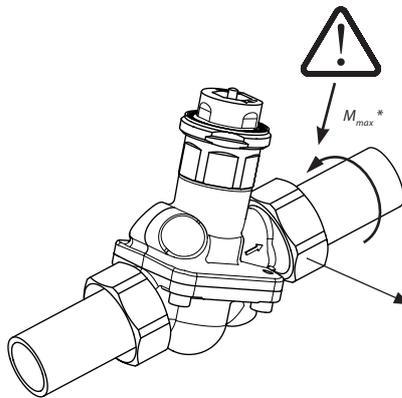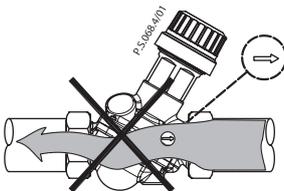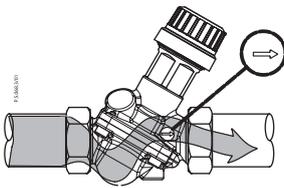


DN	To pipe		Weld.c.		Solder.c.	
	R	L (mm)	L (mm)	Code No.	L (mm)	Code No.
10	R 3/8	26		003Z0231	17	065Z7016
15	R 1/2	27.5	37	003Z0232	22	065Z7017
20	R 3/4	30.5	42	003Z0233		
25	R 1	35	42	003Z0234		
32	R 1 1/4	38.5	42	003Z0235		

¹⁾ M_{max} for DN 10 is 35 Nm


²⁾ Not applicable with valves with Eurocone connection (003Z1281)

TWA-Z

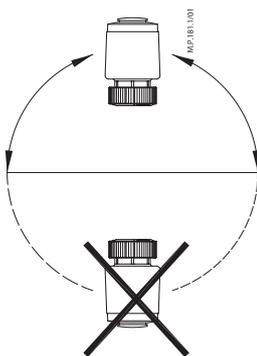


IP 41

ABNM

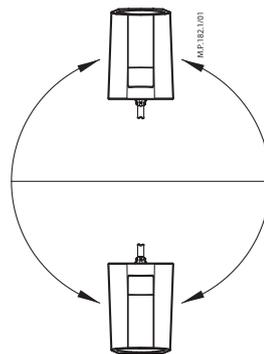

IP 54

AMV/AME 110NL, 120 NL

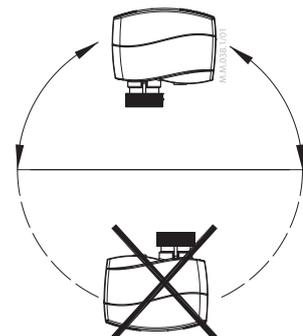


IP 42

AB-QM DN 10-32

Shut off

$\Delta p_{max} = 1 \text{ bar}$


Code No.: 003Z0240

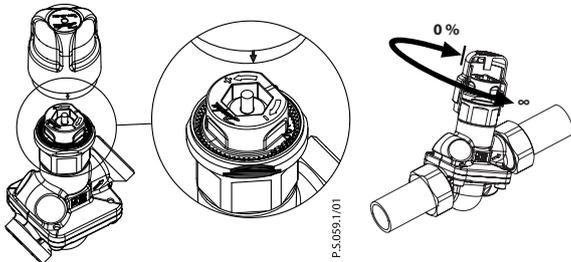

P.5.009.1/01


$\Delta p_{max} = 16 \text{ bar}$

Code No.: 003Z1230

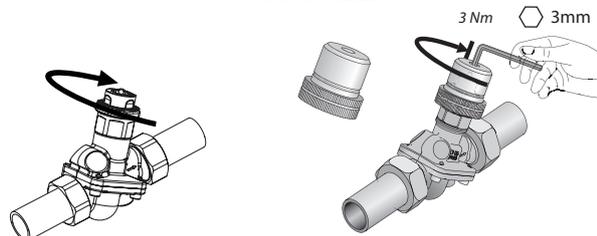


3 Nm 3mm

Setting



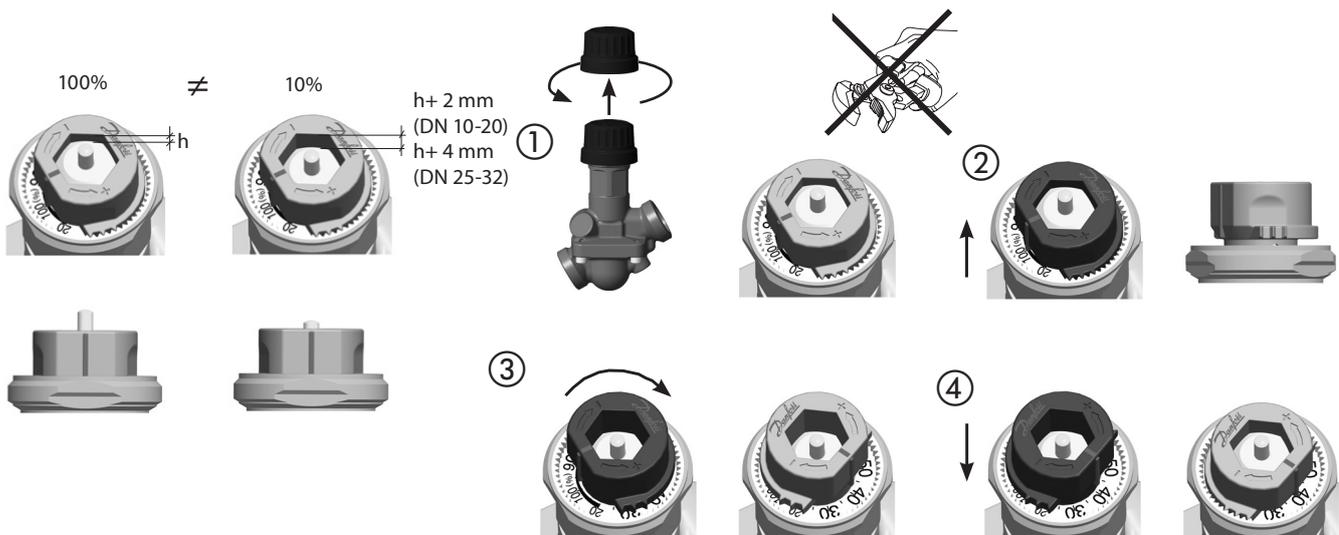


Locking

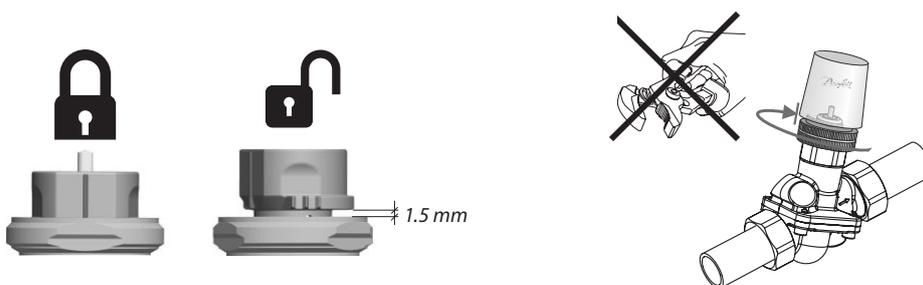

AB-QM DN 10-32

Measuring

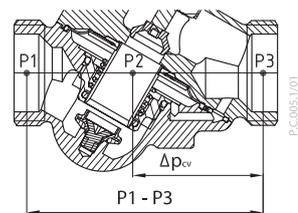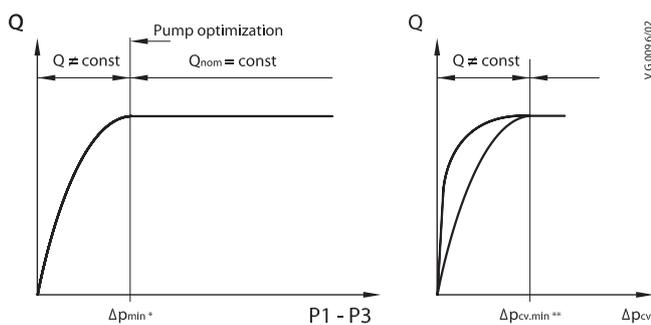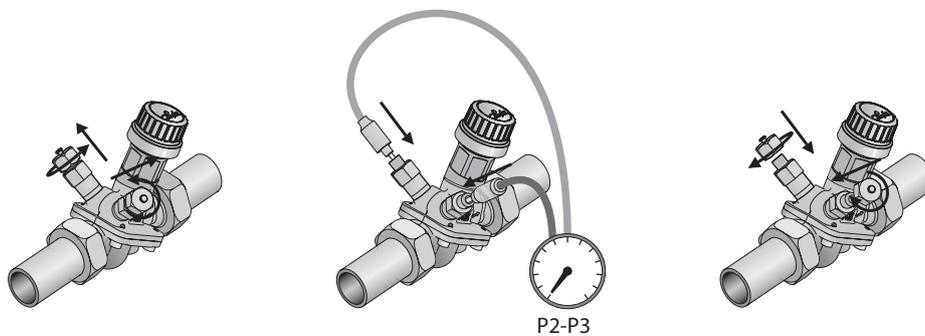

* $\Delta p_{min} = (P1-P3)_{min}$
 ** $\Delta p_{cvmin} = \Delta p_{cvmin}$



-10...95 °C



PN 16



$\Delta p_{max} = 600 \text{ kPa (6 bar)}$



AB-QM DN 10-32

DN 10	Low Flow			Normal Flow		
	L/h	L/s	GPM	L/h	L/s	GPM
20%	30	0.008	0.13	55	0.015	0.24
25%	38	0.010	0.17	69	0.019	0.30
30%	45	0.013	0.20	83	0.023	0.36
35%	53	0.015	0.23	96	0.027	0.42
40%	60	0.017	0.26	110	0.031	0.48
45%	68	0.019	0.30	124	0.034	0.54
50%	75	0.021	0.33	138	0.038	0.61
55%	83	0.023	0.36	151	0.042	0.67
60%	90	0.025	0.40	165	0.046	0.73
65%	98	0.027	0.43	179	0.050	0.79
70%	105	0.029	0.46	193	0.053	0.85
75%	113	0.031	0.50	206	0.057	0.91
80%	120	0.033	0.53	220	0.061	0.97
85%	128	0.035	0.56	234	0.065	1.03
90%	135	0.038	0.59	248	0.069	1.09
95%	143	0.040	0.63	261	0.073	1.15
100%	150	0.042	0.66	275	0.076	1.21
105%	158	0.044	0.69	289	0.080	1.27
110%	165	0.046	0.73	303	0.084	1.33
115%	173	0.048	0.76	316	0.088	1.39
120%	180	0.050	0.79	330	0.092	1.45

DN 15	Low Flow			Normal Flow			High Flow		
	L/h	L/s	GPM	L/h	L/s	GPM	L/h	L/s	GPM
20%	55	0.015	0.24	90	0.025	0.40	227	0.063	1.00
25%	69	0.019	0.30	113	0.031	0.50	284	0.079	1.25
30%	83	0.023	0.36	135	0.038	0.59	341	0.095	1.50
35%	96	0.027	0.42	158	0.044	0.69	397	0.110	1.75
40%	110	0.031	0.48	180	0.050	0.79	454	0.126	2.00
45%	124	0.034	0.54	203	0.056	0.89	511	0.142	2.25
50%	138	0.038	0.61	225	0.063	0.99	568	0.158	2.50
55%	151	0.042	0.67	248	0.069	1.09	624	0.173	2.75
60%	165	0.046	0.73	270	0.075	1.19	681	0.189	3.00
65%	179	0.050	0.79	293	0.081	1.29	738	0.205	3.25
70%	193	0.053	0.85	315	0.088	1.39	795	0.221	3.50
75%	206	0.057	0.91	338	0.094	1.49	851	0.236	3.75
80%	220	0.061	0.97	360	0.100	1.58	908	0.252	4.00
85%	234	0.065	1.03	383	0.106	1.68	965	0.268	4.24
90%	248	0.069	1.09	405	0.113	1.78	1022	0.284	4.49
95%	261	0.073	1.15	428	0.119	1.88	1078	0.300	4.74
100%	275	0.076	1.21	450	0.125	1.98	1135	0.315	4.99
105%	289	0.080	1.27	473	0.131	2.08	1192	0.331	5.24
110%	303	0.084	1.33	495	0.138	2.18	1249	0.347	5.49
115%	316	0.088	1.39	518	0.144	2.28	-	-	-
120%	330	0.092	1.45	540	0.150	2.38	-	-	-

DN 20	Normal Flow			High Flow		
	L/h	L/s	GPM	L/h	L/s	GPM
20%	180	0.050	0.79	340	0.094	1.50
25%	225	0.063	0.99	425	0.118	1.87
30%	270	0.075	1.19	510	0.142	2.24
35%	315	0.088	1.39	595	0.165	2.62
40%	360	0.100	1.58	680	0.189	2.99
45%	405	0.113	1.78	765	0.213	3.37
50%	450	0.125	1.98	850	0.236	3.74
55%	495	0.138	2.18	935	0.260	4.11
60%	540	0.150	2.38	1020	0.283	4.49
65%	585	0.163	2.57	1105	0.307	4.86
70%	630	0.175	2.77	1190	0.331	5.24
75%	675	0.188	2.97	1275	0.354	5.61
80%	720	0.200	3.17	1360	0.378	5.98
85%	765	0.213	3.37	1445	0.401	6.36
90%	810	0.225	3.56	1530	0.425	6.73
95%	855	0.238	3.76	1615	0.449	7.11
100%	900	0.250	3.96	1700	0.472	7.48
105%	945	0.263	4.16	1785	0.496	7.85
110%	990	0.275	4.36	1870	0.519	8.23
115%	1035	0.288	4.55	-	-	-
120%	1080	0.300	4.75	-	-	-

DN 25	Normal Flow			High Flow		
	L/h	L/s	GPM	L/h	L/s	GPM
20%	340	0.094	1.50	540	0.150	2.38
25%	425	0.118	1.87	675	0.188	2.97
30%	510	0.142	2.24	810	0.225	3.56
35%	595	0.165	2.62	945	0.263	4.16
40%	680	0.189	2.99	1080	0.300	4.75
45%	765	0.213	3.37	1215	0.338	5.35
50%	850	0.236	3.74	1350	0.375	5.94
55%	935	0.260	4.11	1485	0.413	6.53
60%	1020	0.283	4.49	1620	0.450	7.13
65%	1105	0.307	4.86	1755	0.488	7.72
70%	1190	0.331	5.24	1890	0.525	8.32
75%	1275	0.354	5.61	2025	0.563	8.91
80%	1360	0.378	5.98	2160	0.600	9.50
85%	1445	0.401	6.36	2295	0.638	10.10
90%	1530	0.425	6.73	2430	0.675	10.69
95%	1615	0.449	7.11	2565	0.713	11.29
100%	1700	0.472	7.48	2700	0.750	11.88
105%	1785	0.496	7.85	2835	0.788	12.47
110%	1870	0.519	8.23	2970	0.825	13.07

DN 32	Normal Flow			High Flow		
	L/h	L/s	GPM	L/h	L/s	GPM
20%	640	0.178	2.82	800	0.222	3.52
25%	800	0.222	3.52	1000	0.278	4.40
30%	960	0.267	4.22	1200	0.333	5.28
35%	1120	0.311	4.93	1400	0.389	6.16
40%	1280	0.356	5.63	1600	0.444	7.04
45%	1440	0.400	6.34	1800	0.500	7.92
50%	1600	0.444	7.04	2000	0.556	8.80
55%	1760	0.489	7.74	2200	0.611	9.68
60%	1920	0.533	8.45	2400	0.667	10.56
65%	2080	0.578	9.15	2600	0.722	11.44
70%	2240	0.622	9.86	2800	0.778	12.32
75%	2400	0.667	10.56	3000	0.833	13.20
80%	2560	0.711	11.26	3200	0.889	14.08
85%	2720	0.756	11.97	3400	0.944	14.96
90%	2880	0.800	12.67	3600	1.000	15.84
95%	3040	0.844	13.38	3800	1.056	16.72
100%	3200	0.889	14.08	4000	1.111	17.60
105%	3360	0.933	14.78	4200	1.167	18.48
110%	3520	0.978	15.49	4400	1.222	19.36

ИМПОРТЕР:
UA: ТОВ з ІІ «Данфосс ТОВ», вул. Вікентія Хвойки, 15/15/6, м. Київ, 04080, Україна

Danfoss A/S
 Climate Solutions • danfoss.com • +45 7488 2222

All information, including, but not limited to information on selection of product, its application or use, product design, weight, dimensions, capacity or any other technical data in product manuals, catalogues descriptions, advertisements, etc. and whether made available in writing, orally, electronically, online or via download, shall be considered informative, and is only binding if and to the extent, explicit reference is made in a quotation or order confirmation. Danfoss cannot accept any responsibility for possible errors in catalogues, brochures, videos and other material. Danfoss reserves the right to alter its products without notice. This also applies to products ordered but not delivered provided that such alterations can be made without changes to form, fit or function of the product.
 All trademarks in this material are property of Danfoss A/S or Danfoss group companies. Danfoss and the Danfoss logo are trademarks of Danfoss A/S. All rights reserved.