



Operating Guide

ASV-PV / DN 15-50 / 73694260


ASV-PV / DN 15-50 (4th gen.)

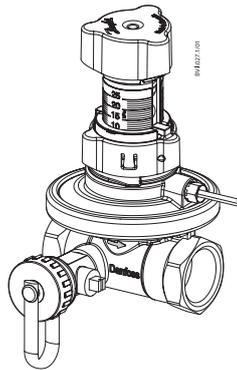




DN 15-25

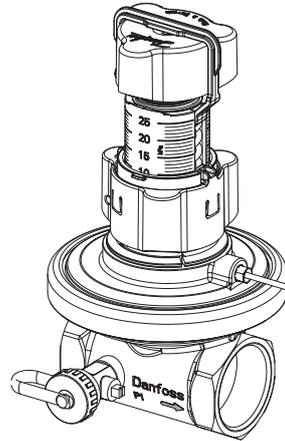

DN 32-50




Installation

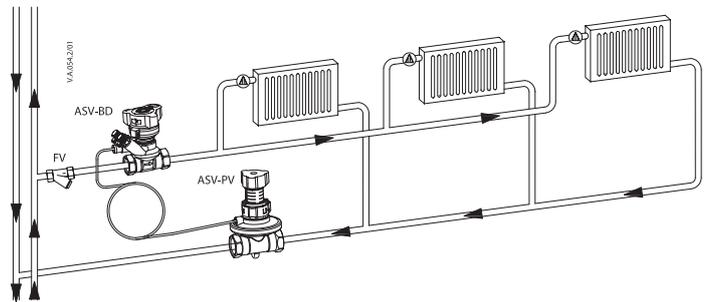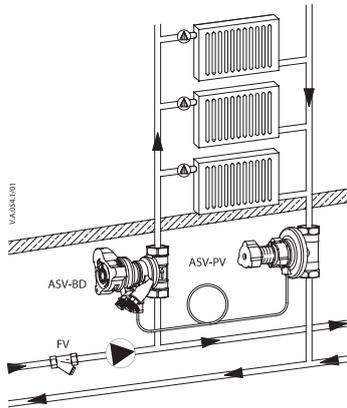

0 ... 120 °C





PN 16



$\Delta p_{max} = 150 \text{ kPa}$

DN	H min.	Int. thread ISO 7/1	Ext. thread ISO 228/1
15	80	Rp 1/2	G3/4 A
20	80	Rp 3/4	G1 A
25	100	Rp 1	G1 1/4 A
32	150	Rp 1 1/4	G1 1/2 A
40	150	Rp 1 1/2	G1 3/4 A
50	150	Rp 2	G2 1/4 A

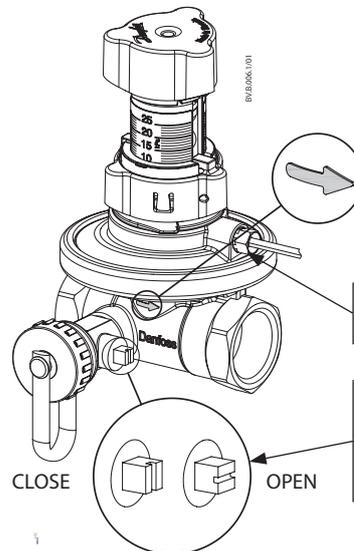


	5-8 Nm	<input type="checkbox"/>
	8 mm	<input type="checkbox"/>

	5 mm	<input type="checkbox"/>
--	------	--------------------------


	3.5 - 4.5 mm x 0.7 mm	<input type="checkbox"/>
--	--------------------------	--------------------------

ASV-PV / DN 15-50


Filling

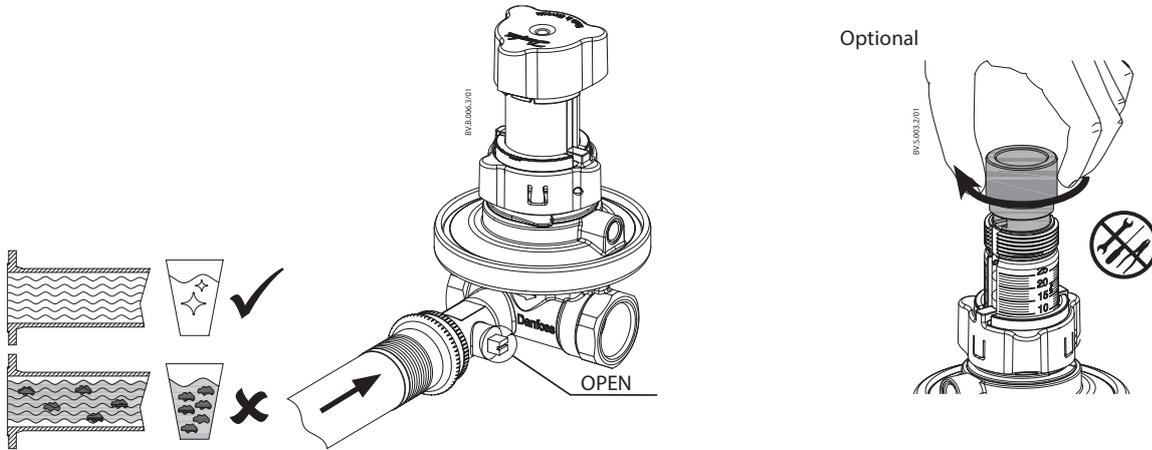


Shut off

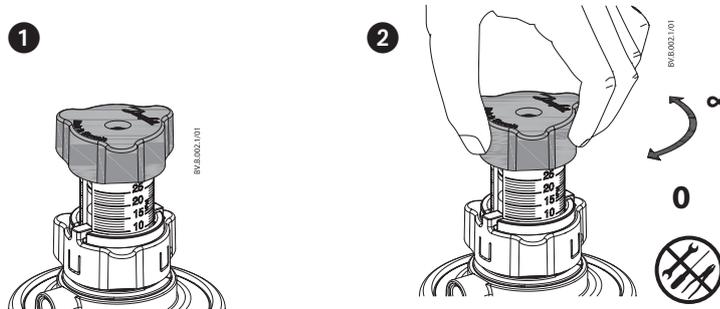

Setting

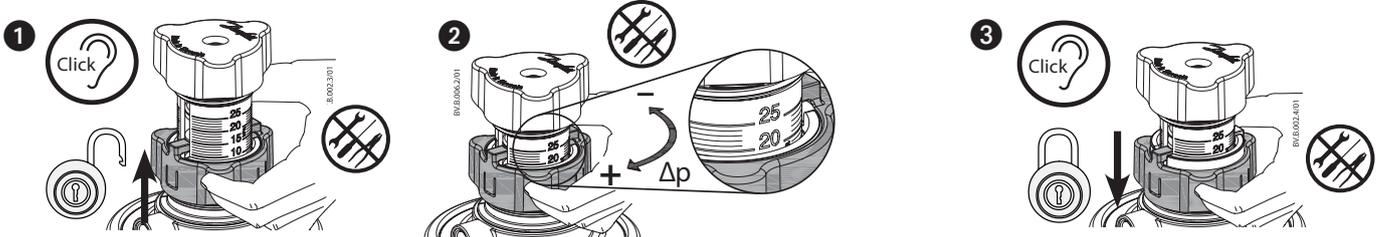

Flushing

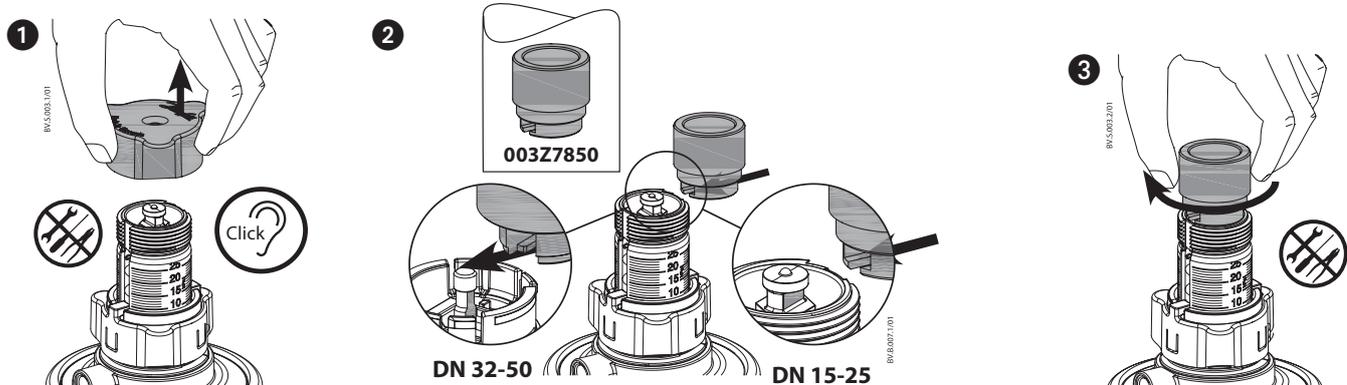

ІМПОРТЕР:
UA: ТОВ з ІІ «Данфосс ТОВ», вул. Вікентія Хвойки, 15/15/6, м. Київ, 04080, Україна

Danfoss A/S
 Climate Solutions • danfoss.com • +45 7488 2222

All information, including, but not limited to information on selection of product, its application or use, product design, weight, dimensions, capacity or any other technical data in product manuals, catalogues descriptions, advertisements, etc. and whether made available in writing, orally, electronically, online or via download, shall be considered informative, and is only binding if and to the extent, explicit reference is made in a quotation or order confirmation. Danfoss cannot accept any responsibility for possible errors in catalogues, brochures, videos and other material. Danfoss reserves the right to alter its products without notice. This also applies to products ordered but not delivered provided that such alterations can be made without changes to form, fit or function of the product.