

ball valve Art. 560



bonetti rubinetterie valduggia

Loc. Molino Rastelli, 2 I-13018 VALDUGGIA (VC) ITALY

Tel. +39 0163 48062 - Fax +39 0163 48188

http://www.briv.it - email: info@briv.it



560
560A
56 F

M/F full port ball valve in hot forged brass. Nickel plated.

PN 30. Max.150°C.

Ends threaded to ISO 228 (DIN 259 BSP 2779).

Art. 560 with steel lever.

Art. 560 A with aluminium lever.

Art. 56 F with steel T-handle.

Sizes: from 1/4" up to 2"

WORKING PRESSURE

for saturated steam (+150°C)

5 bar

for water, oil and non aggressive fluids (+25°C)

30 bar

WORKING TEMPERATURE

Min. -20°C

Max. +150°C


TEST PRESSURE

seal pneumatic test

6,5 bar

Art. 560 A with E.P.D.M. Peroxid O-ring sealing system on stem. (Max. 150°C - Working pressure 5 bar for saturated steam).

Dimensions

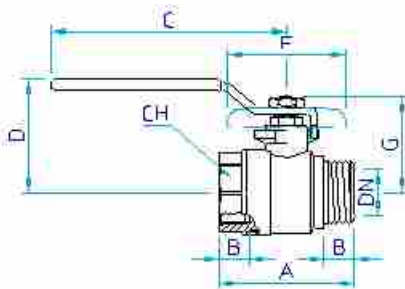

COMPONENTS

MATERIAL-TREATMENT

Q.

Handle	Steel; Dacromet plated; PVC covered	1
Nut	Brass P-CuZn40Pb2; Nickel plated	1
Stem	Brass P-CuZn40Pb2	1
Packing gland	Brass P-CuZn40Pb2	1
Stem packing	P.T.F.E.	2
Washer	Brass P-CuZn40Pb2	1
Tailpiece	Brass P-CuZn40Pb2; Nickel plated	1
Ball seals	P.T.F.E.	2
Ball	Brass P-CuZn40Pb2; Chrome plated	1
Body	Brass P-CuZn40Pb2; Nickel plated	1

Size	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
A	44	44	50	58	68	80	93	110
B	12	12	12	13	15	17	19	21
C	77	77	100	100	120	120	157	157
D	41	41	46	49	62	67	85	92
F	50	50	50	50	60	60	-	-
G	36	36	38	41	47	52	-	-
CH	20.5	20.5	25	31	38.5	47.5	54	66.5
DN	10	10	15	20	25	32	40	50
Gr.	128	126	192	269	439	660	910	1770
M.Carton								
560	240	240	168	126	48	36	24	16
560 A	240	240	168	126	48	36	24	16
56 F	240	240	192	126	48	36	-	-