
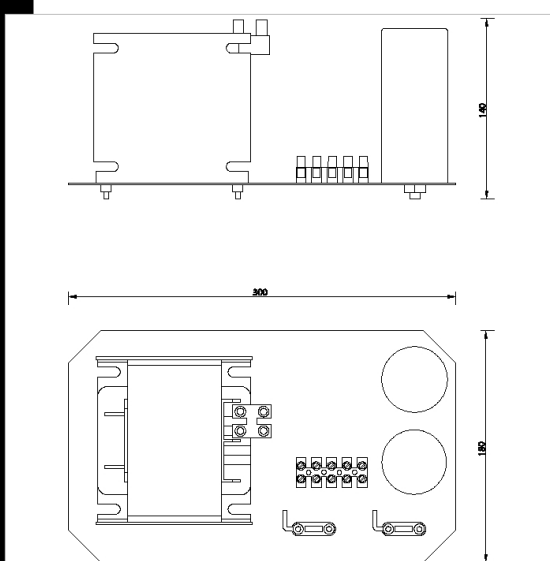


1177 câblage CC IP65

Platine d'alimentation, sans boîtier. Avec ballast et condensateur de compensation.

Download

DXF 2D
- 1177.dxf



Code	Gear	Kg	Lumen-K-CRI	WTot
997640-16	CNR	12,36	1000 JM-TS / SAP-T---	1060 W
997642-16	CNR	16,56	2000 JM-TS---	2085 W

Prodotti



The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated