




Wire Protection & Management > Wiring Ducts & Accessories > Wiring Ducts & Covers

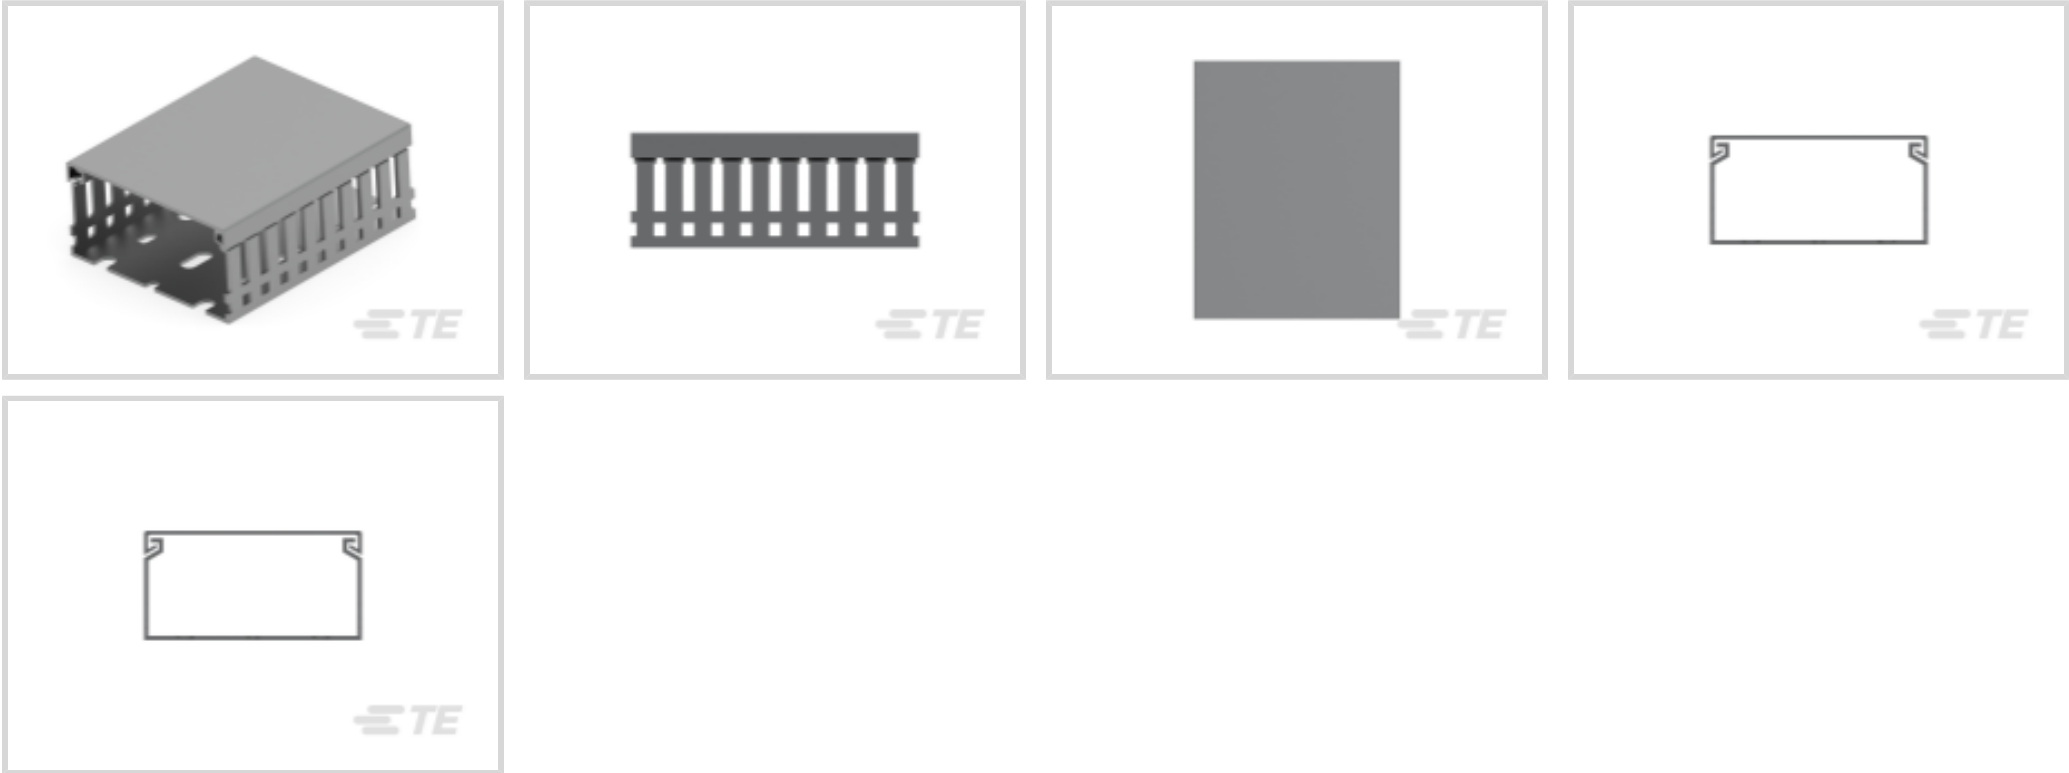

Wiring Duct Product Type: **Wiring Duct**
Wiring Duct & Accessory Material: **PVC**
Product Height: **40 mm [1.575 in]**
Product Length: **2000 mm [78.74 in]**
Product Width: **80 mm [3.15 in]**

Features

Product Type Features

Wiring Duct Product Type	Wiring Duct
--------------------------	-------------

Body Features

Primary Product Color	Gray
-----------------------	------

Housing Features

Wiring Duct & Accessory Material	PVC
----------------------------------	-----

Dimensions

Product Height	40 mm[1.575 in]
Product Length	2000 mm[78.74 in]
Product Width	80 mm[3.15 in]

Usage Conditions

Operating Temperature Range	-5 – 60 °C[23 – 140 °F]
-----------------------------	-------------------------

Packaging Features

Packaging Quantity	18
--------------------	----



Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Out of Scope
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JUNE 2022 (224) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

 TE Part # 1SET411204R0000 WD-1-CP-GR080	 TE Part # 1SET411301R0000 WD-1-RT-4040	 TE Part # 1SET411302R0000 WD-1-RT-4060	 TE Part # 1SET411303R0000 WD-1-RT-6080
 TE Part # 1SET411304R0000 WD-1-RT-4080	 TE Part # 1SET411305R0000 WD-1-RT-6040	 TE Part # 1SET411306R0000 WD-1-RT-6060	 TE Part # 1SET411307R0000 WD-1-RT-6010

1SET411021R0000

Wiring Duct, PVC, Height 40 mm [1.575 in], Length 2000 mm [78.74 in], Width 80 mm [3.15 in], -5 – 60 °C [23 – 140 °F]





TE Part # 1SET411401R0000
WD-1-TL-0001



TE Part # 1SET411402R0000
WD-1-TL-0002



TE Part # 1SET411403R0000
WD-1-TL-0003



TE Part # 1SET411404R0000
WD-1-TL-0004



TE Part # 1SET411407R0000
WD-1-TL-0007

Documents

Product Drawings

WD-1-DP-GR8040

French

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1SET411021R0000_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1SET411021R0000_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1SET411021R0000_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

Infographic - entrelec ews-linecard

English

Datasheet - ENTRELEC-wiring-duct-DS

English

Datasheet - Entrelec Electrical-Solutions

Essential Entrelec Terminal Blocks

French

1SET411021R0000

Wiring Duct, PVC, Height 40 mm [1.575 in], Length 2000 mm [78.74 in], Width 80 mm [3.15 in], -5 – 60 °C [23 – 140 °F]



Essential Entelec Terminal Blocks

English

Agency Approvals

UL

English