# 1SNA105046R2300 - ACTIVE

#### ENTRELEC | ENTRELEC SNA

TE Internal #: 1SNA105046R2300 Modular Terminal Blocks, Feed-Through, Screw Clamp Terminal Block, White, Product Spacing .235 in [6 mm], 2 Position, Screw Terminal, ENTRELEC SNA

#### View on TE.com >

Connectors > Terminal Blocks & Strips > Modular Terminal Blocks



Block Function: Feed-Through

Modular Terminal Block Product Type: Screw Clamp Terminal Block

Rated Cross Section: 4 mm<sup>2</sup>

Primary Product Color: White

### Features

## Product Type Features



Modular Terminal Block Product Type	Screw Clamp Terminal Block
Configuration Features	
Gauge Type	A4
Number of Levels	2
Number of Poles	4
Number of Circuits	2
Block Function	Feed-Through
Number of Positions	2
Electrical Characteristics	
Operating Voltage Rating (UL & CSA) (Max) - Main Circuit	300 V
Impulse Withstanding Voltage Rating (IEC)	8000 V
Voltage Rating (CSA)	600 V
Current Rating (CSA)	25 A
Short-Time Withstanding Current Rating @ 1s	480 A
Voltage Rating (IEC)	800 V

**C** For support call+1 800 522 6752

Modular Terminal Blocks, Feed-Through, Screw Clamp Terminal Block, White, Product Spacing .235 in [6 mm], 2 Position, Screw Terminal, ENTRELEC SNA



Current Rating (UL)	20 A
Current Rating (IEC)	32 A
Voltage Rating	800 VAC
Body Features	
Product Weight	20 g[.705 oz]
Primary Product Color	White
Termination Features	
Termination Method to Wire & Cable	Screw Terminal
Mechanical Attachment	
DIN Rail Mounting Type	G32, TH35-15, TH35-7.5
Tightening Torque	4.4 in-lbs
Connector Mounting Type	DIN Rail
Housing Features	
Housing Material	Polyamide 6.6
Dimensions	
Main Circuit Capacity - 1 Rigid Stranded Conductor per Screw	.2 – 4 mm <sup>2</sup>

Clamp

Wire Stripping Length	8.5 mm[.335 in]
Main Circuit Capacity - 1 Flexible Conductor per Spring Clamp	.22 – 4 mm <sup>2</sup>
Tool Size	4 mm[.157 in]
Product Depth	52 mm
Product Width	6 mm[.235 in]
Product Length	52 mm
Product Height	65.5 mm
Rated Cross Section	4 mm <sup>2</sup>
Product Spacing	6 mm[.235 in]
Wire Size	4 mm <sup>2</sup>
Usage Conditions	
Storage Temperature Range	-55 – 110 °C[-67 – 230 °F]
Installation Temperature Range	-5 – 40 °C[23 – 104 °F]
Operating Temperature Range	-55 – 110 °C[-67 – 230 °F]
Operation/Application	

**C** For support call+1 800 522 6752

Modular Terminal Blocks, Feed-Through, Screw Clamp Terminal Block, White, Product Spacing .235 in [6 mm], 2 Position, Screw Terminal, ENTRELEC SNA



Circuit Application	Signal
Industry Standards	
IP Rating	IP20
UL Flammability Rating	UL 94V-0
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JUNE 2022 (224) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

## **Compatible Parts**




Modular Terminal Blocks, Feed-Through, Screw Clamp Terminal Block, White, Product Spacing .235 in [6 mm], 2 Position, Screw Terminal, ENTRELEC SNA



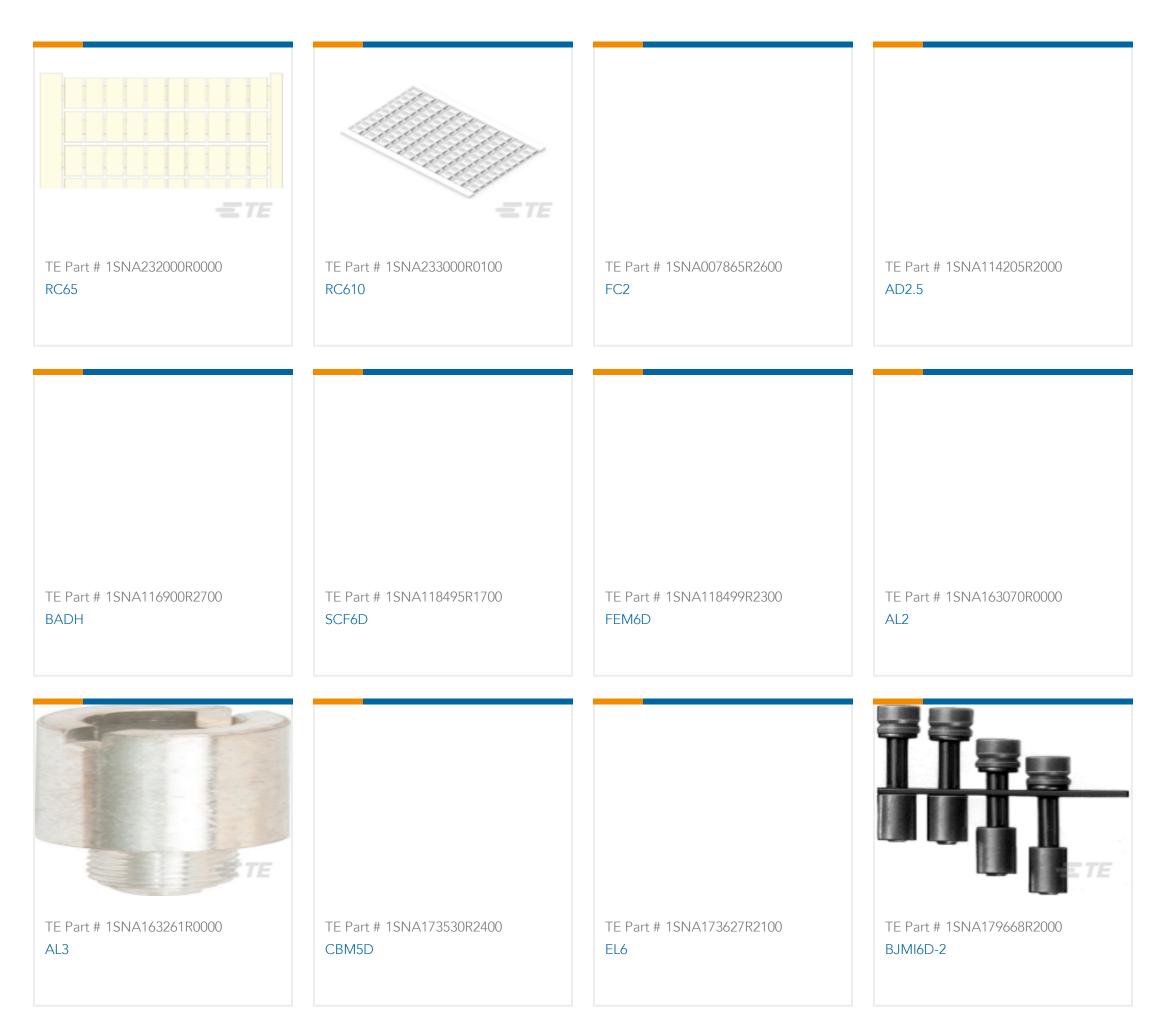



# Also in the Series | ENTRELEC SNA

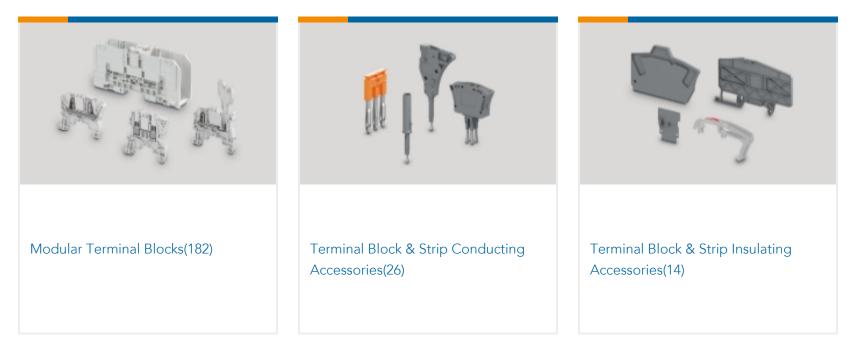

# Customers Also Bought

Modular Terminal Blocks, Feed-Through, Screw Clamp Terminal Block, White, Product Spacing .235 in [6 mm], 2 Position, Screw Terminal, ENTRELEC SNA





### Documents

## **Product Drawings** M4/6.D2

English

#### **CAD** Files

3D PDF

3D

**Customer View Model** 

ENG\_CVM\_CVM\_1SNA105046R2300\_A.2d\_dxf.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_1SNA105046R2300\_A.3d\_igs.zip

English

Customer View Model

#### ENG\_CVM\_CVM\_1SNA105046R2300\_A.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use

Datasheets & Catalog Pages

Catalogue - ENTRELEC terminal-blocks-sna-series

English

M4/6.D2

English

ENTRELEC Terminal Blocks Catalogue (RUS)