

1SNA115500R2500

✓ ACTIVE

ENTRELEC | ENTRELEC SNA

TE Internal #: 1SNA115500R2500

Modular Terminal Blocks, Feed-Through, Screw Clamp Terminal Block, Gray, Product Spacing .314 in [8 mm], 2 Position, Screw Terminal, ENTRELEC SNA

[View on TE.com >](#)



Connectors > Terminal Blocks & Strips > Modular Terminal Blocks



Block Function: **Feed-Through**
Modular Terminal Block Product Type: **Screw Clamp Terminal Block**
Rated Cross Section: **6 mm²**
Primary Product Color: **Gray**

Features

Product Type Features

Modular Terminal Block Product Type	Screw Clamp Terminal Block
-------------------------------------	----------------------------

Configuration Features

Number of Levels	1
Number of Poles	2
Number of Circuits	1
Block Function	Feed-Through
Number of Positions	2

Electrical Characteristics

Operating Voltage Rating (UL & CSA) (Max) - Main Circuit	600 V
Voltage Rating (CSA)	600 V
Current Rating (CSA)	15 A
Short-Time Withstanding Current Rating @ 1s	720 A
Voltage Rating (IEC)	500 V
Current Rating (UL)	40 A
Current Rating (IEC)	41 A
Voltage Rating	500 VAC

Body Features

Product Weight	21 g[.741 oz]
----------------	---------------



Primary Product Color

Gray

Termination Features

Termination Method to Wire & Cable	Screw Terminal
------------------------------------	----------------

Mechanical Attachment

DIN Rail Mounting Type	G32, TH35-15, TH35-7.5
Tightening Torque	7.1 in-lbs
Terminal Block Disconnect Type	Push Turn Knob
Connector Mounting Type	DIN Rail

Housing Features

Housing Material	Polyamide 6.6
------------------	---------------

Dimensions

Main Circuit Capacity - 1 Rigid Stranded Conductor per Screw Clamp	.5 – 10 mm ²
Wire Stripping Length	11 mm[.432 in]
Main Circuit Capacity - 1 Flexible Conductor per Spring Clamp	.5 – 6 mm ²
Tool Size	4 mm[.157 in]
Product Depth	57.5 mm
Product Width	8 mm[.314 in]
Product Length	57.5 mm
Product Height	55.5 mm
Rated Cross Section	6 mm ²
Product Spacing	8 mm[.314 in]
Wire Size	6 mm ²

Usage Conditions

Storage Temperature Range	-55 – 110 °C[-67 – 230 °F]
Installation Temperature Range	-5 – 40 °C[23 – 104 °F]
Operating Temperature Range	-55 – 110 °C[-67 – 230 °F]

Operation/Application

Circuit Application	Signal
---------------------	--------

Industry Standards

IP Rating	IP20
UL Flammability Rating	UL 94V-0



Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JUNE 2022 (224) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 1SNA103588R2600
SCFT1

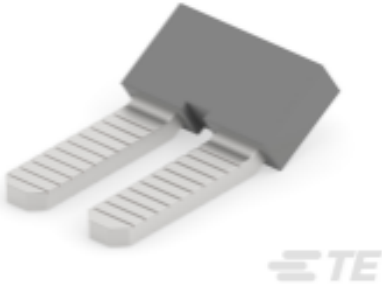

TE Part # 1SNA116538R1700
PC8-2





TE Part # 1SNA116539R1000
PC8-3




TE Part # 1SNA116540R2500
PC8-4

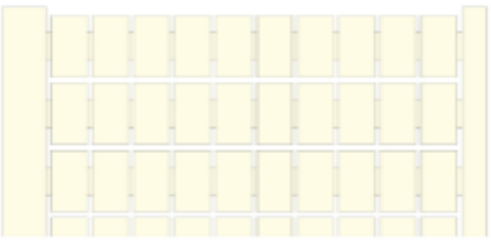

 TE Part # 1SNA163313R2400 PC8-10	 TE Part # 1SNA234000R0200 RC810	 TE Part # 1SNA400711R0600 PC8-R1	 TE Part # 1SNA400712R0700 PC8-R2
 TE Part # 1SNA400713R0000 PC8-R3	 TE Part # 1SNA400724R0300 PC8-R4	 TE Part # 1SNA400842R0000 PC8-R5	 TE Part # 1SNA400843R0000 PC8-R6
 TE Part # 1SNA400849R0000 PC8-R7	 TE Part # 1SNA400850R0000 PC8-R8	 TE Part # 1SNA113137R0200 FEMT1	 TE Part # 1SNA114205R2000 AD2.5
 TE Part # 1SNA164581R1300 BJS8	 TE Part # 1SNA164582R1400 BJS8	 TE Part # 1SNA164583R1500 BJS8	 TE Part # 1SNA167860R0100 FC4

Also in the Series | ENTRELEC SNA

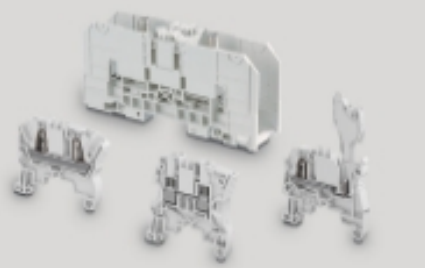 Modular Terminal Blocks(182)	 Terminal Block & Strip Conducting Accessories(26)	 Terminal Block & Strip Insulating Accessories(14)
---	---	---

Customers Also Bought

1SNA115500R2500

Modular Terminal Blocks, Feed-Through, Screw Clamp Terminal Block, Gray, Product Spacing .314 in [8 mm], 2 Position, Screw Terminal, ENTRELEC SNA





TE Part #1SNK900001R0000
BAM4




TE Part #1SNA115277R2000
M6/8.STP




TE Part #1SNA173220R0500
PR30



TE Part #1SNA234002R2000
RC810 1->10 (X10) HORIZONTAL

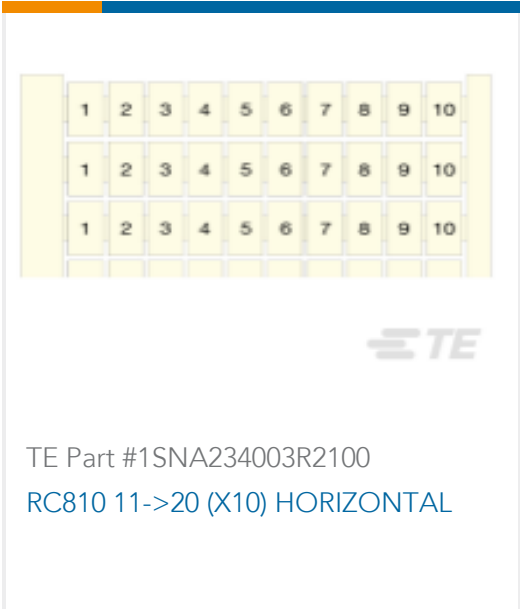

TE Part #1SNA234003R2100
RC810 11->20 (X10) HORIZONTAL

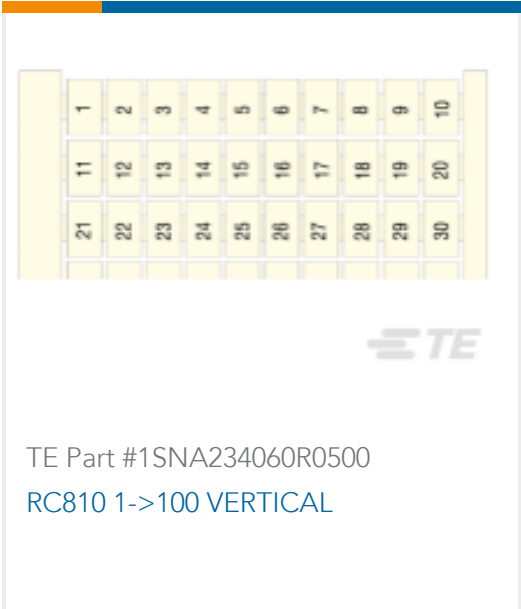


TE Part #1SNA234060R0500
RC810 1->100 VERTICAL



TE Part #1SNA113137R0200
FEMT1



TE Part #1SNA114434R0500
FEMR10

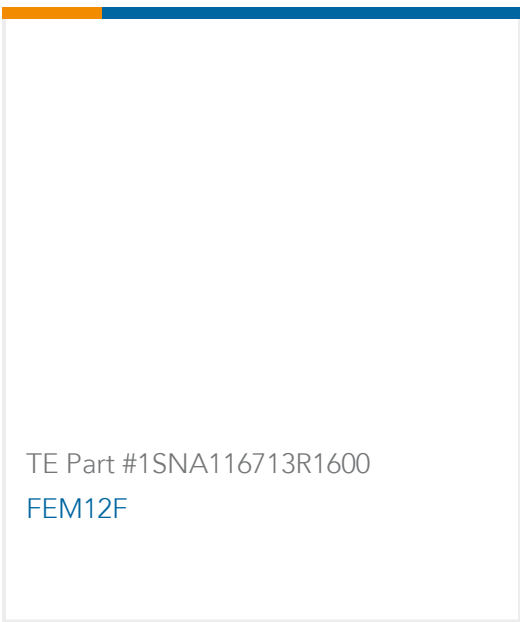

TE Part #1SNA116713R1600
FEM12F



TE Part #1SNA113084R0100
PEBM

Documents

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1SNA115500R2500_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1SNA115500R2500_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1SNA115500R2500_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

Catalogue - ENTRELEC terminal-blocks-sna-series

English

M6/8.STP3

English

1SNA115500R2500

Modular Terminal Blocks, Feed-Through, Screw Clamp Terminal Block, Gray, Product
Spacing .314 in [8 mm], 2 Position, Screw Terminal, ENTRELEC SNA



[ENTRELEC Terminal Block - Master Catalog](#)

English

[ENTRELEC Terminal Blocks Catalogue \(RUS\)](#)