

1SNA115701R2200

✓ ACTIVE

ENTRELEC | ENTRELEC SNA


TE Internal #: 1SNA115701R2200

Modular Terminal Blocks, Disconnect, Screw Clamp Terminal Block,
Gray, Product Spacing .196 in [5 mm], 2 Position, Screw Terminal,
ENTRELEC SNA

[View on TE.com >](#)



Connectors > Terminal Blocks & Strips > Modular Terminal Blocks

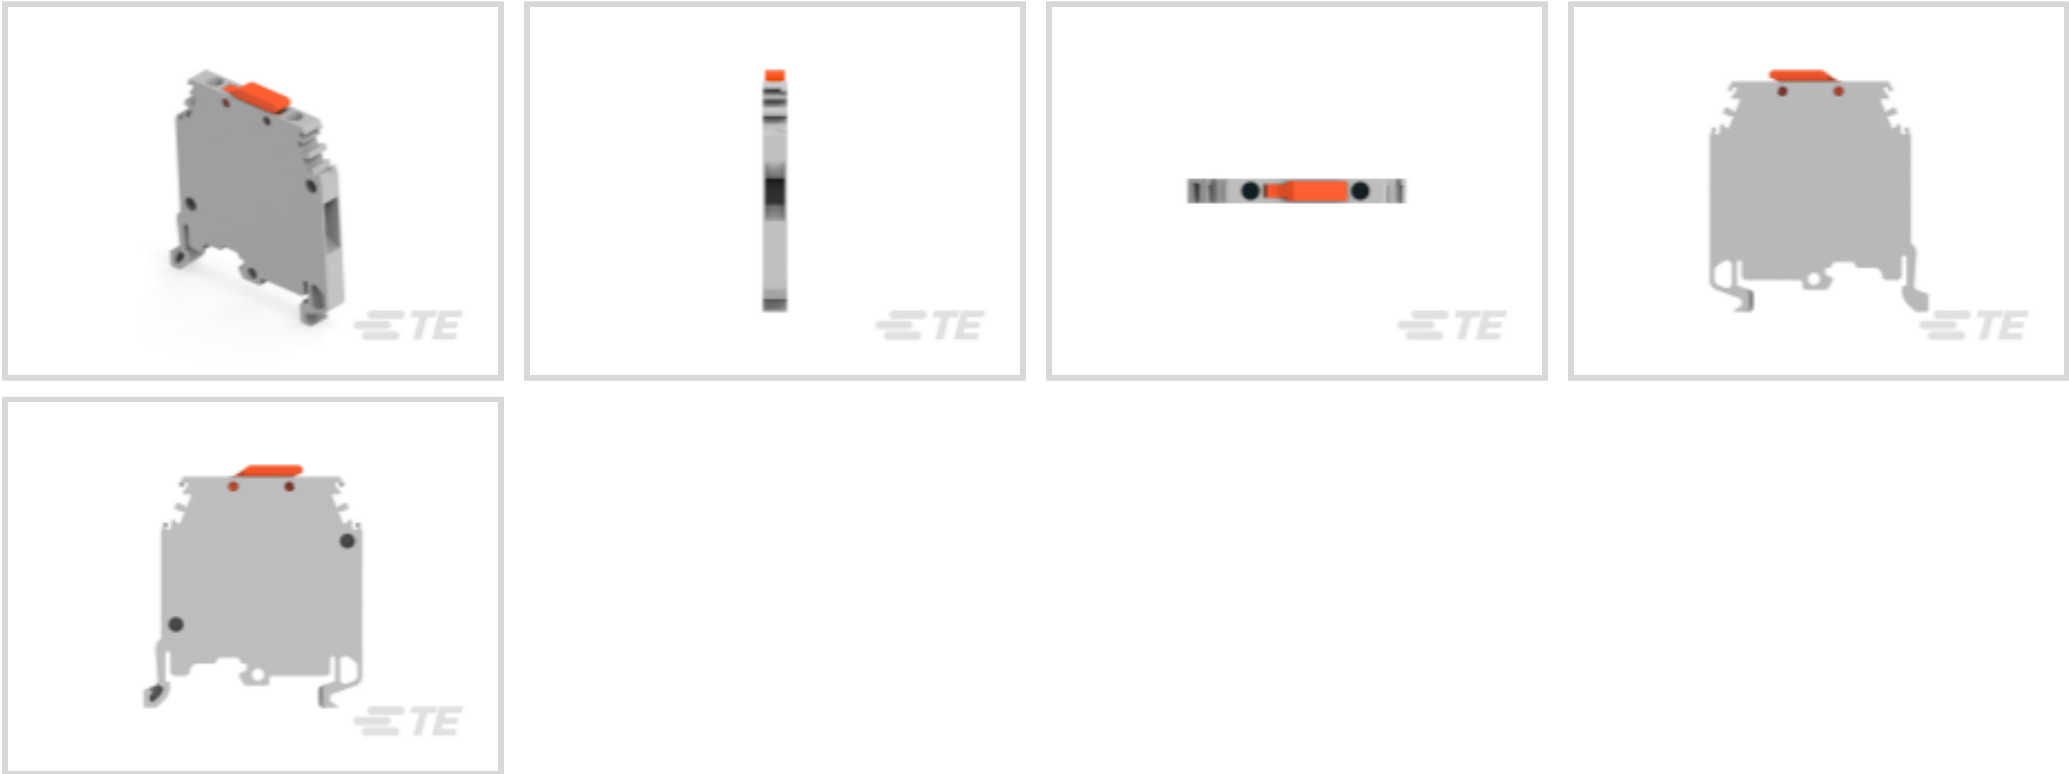

Block Function: **Disconnect**
Modular Terminal Block Product Type: **Screw Clamp Terminal Block**
Rated Cross Section: **2.5 mm²**
Primary Product Color: **Gray**
Product Spacing: **5 mm [.196 in]**

Features

Product Type Features

Modular Terminal Block Product Type	Screw Clamp Terminal Block
-------------------------------------	----------------------------

Configuration Features

Gauge Type	A3
Number of Levels	1
Number of Poles	2
Number of Circuits	1
Block Function	Disconnect
Number of Positions	2

Electrical Characteristics

Impulse Withstanding Voltage Rating (IEC)	4000 V
Voltage Rating (CSA)	600 V
Current Rating (CSA)	15 A
Short-Time Withstanding Current Rating @ 1s	120 A
Voltage Rating (IEC)	320 V



Current Rating (IEC)	10 A
Voltage Rating	320 VAC

Body Features

Product Weight	11 g[.388 oz]
Primary Product Color	Gray

Termination Features

Termination Method to Wire & Cable	Screw Terminal
------------------------------------	----------------

Mechanical Attachment

DIN Rail Mounting Type	G32, TH35-15, TH35-7.5
Tightening Torque	3.5 in-lbs
Terminal Block Disconnect Type	Blade
Connector Mounting Type	DIN Rail

Housing Features

Housing Material	Polyamide 6.6
------------------	---------------

Dimensions

Main Circuit Capacity - 1 Rigid Stranded Conductor per Screw Clamp	.5 – 4 mm²
Wire Stripping Length	10 mm[.393 in]
Main Circuit Capacity - 1 Flexible Conductor per Spring Clamp	.5 – 2.5 mm²
Tool Size	3.5 mm[.138 in]
Product Depth	44.5 mm
Product Width	5 mm[.196 in]
Product Length	44.5 mm
Product Height	44.5 mm
Rated Cross Section	2.5 mm²
Product Spacing	5 mm[.196 in]
Wire Size	2.5 mm²

Usage Conditions

Storage Temperature Range	-55 – 110 °C[-67 – 230 °F]
Installation Temperature Range	-5 – 40 °C[23 – 104 °F]
Operating Temperature Range	-55 – 110 °C[-67 – 230 °F]

Operation/Application

--



Circuit Application	Signal
---------------------	--------

Industry Standards

IP Rating	IP10
UL Flammability Rating	UL 94V-0

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JUNE 2022 (224) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts





TE Part # 1SNA113542R1000
PC5-2

TE Part # 1SNA113544R1200
PC5-10

TE Part # 1SNA114825R0500
SCFM6


TE Part # 1SNA231000R0700
RC510

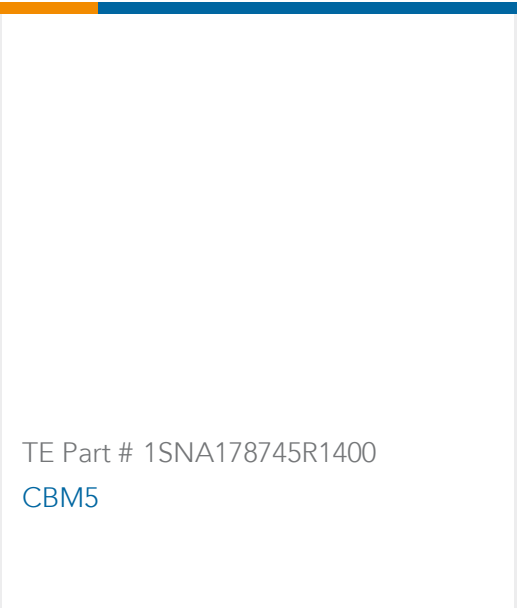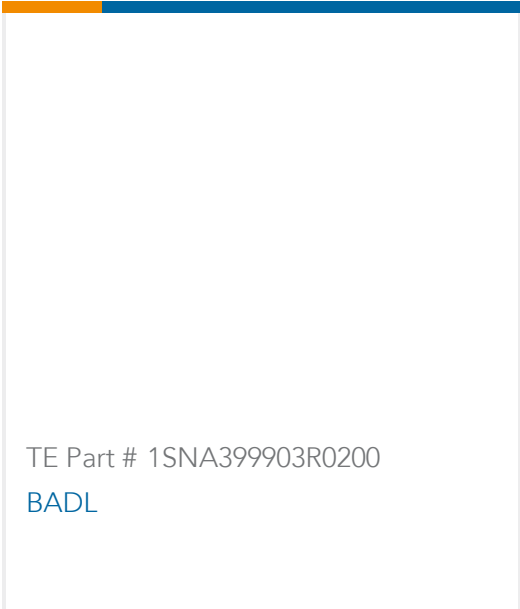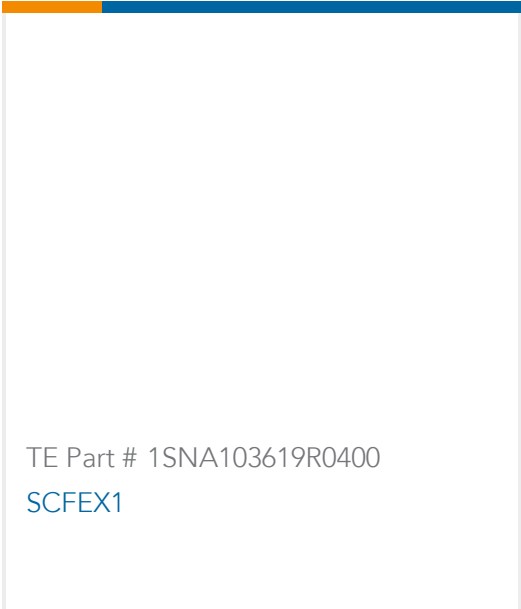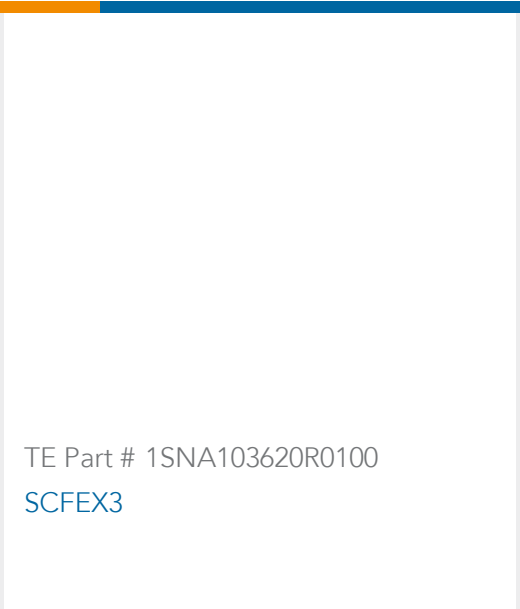

 TE Part # 1SNA007865R2600 FC2	 TE Part # 1SNA118368R1600 FEM6	 TE Part # 1SNA118707R0300 SCF6	 TE Part # 1SNA178745R1400 CBM5
 TE Part # 1SNA399903R0200 BADL	 TE Part # 1SNA103619R0400 SCFEX1	 TE Part # 1SNA103620R0100 SCFEX3	 TE Part # 1SNA178746R1500 CBM8

Also in the Series

ENTRELEC SNA

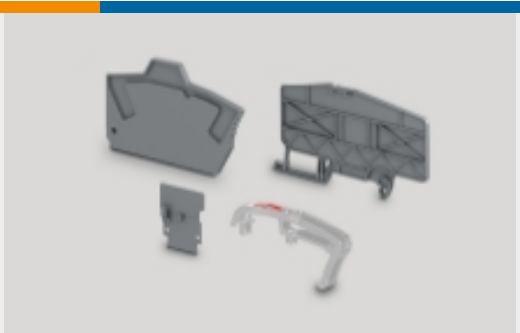 Modular Terminal Blocks(182)	 Terminal Block & Strip Conducting Accessories(26)	 Terminal Block & Strip Insulating Accessories(14)
---	---	--

Customers Also Bought

 TE Part #1SNK705911R0000 EK2.5-3P	 TE Part #1SNK705912R0000 EK2.5-4P	 TE Part #1SNA115260R0300 M6/8.1	 TE Part #1SNA173523R1100 PC81-10
 TE Part #1SNA190004R2300 D185/55.FF	 TE Part #1SNA234600R1000 RC810TT	 TE Part #1SNK160000R0000 MC812	 TE Part #1SNK169999R0000 MC812PA



TE Part #1SNK710020R0000
ZK10-BL



TE Part #1SNK710910R0000
EK10

Documents

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1SNA115701R2200_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1SNA115701R2200_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1SNA115701R2200_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

Catalogue - ENTRELEC terminal-blocks-sna-series

English

MA2.5/5.SNBT

English

ENTRELEC Terminal Blocks Catalogue (RUS)