



Connectors > Terminal Blocks & Strips > Modular Terminal Blocks



Block Function: **Feed-Through**

Modular Terminal Block Product Type: **Screw Clamp Terminal Block**

Rated Cross Section: **4 mm²**

Primary Product Color: **Purple**

Features

Product Type Features

Modular Terminal Block Product Type	Screw Clamp Terminal Block
-------------------------------------	----------------------------

Configuration Features

Gauge Type	A4
Number of Levels	1
Number of Poles	2
Number of Circuits	1
Block Function	Feed-Through
Number of Positions	2

Electrical Characteristics

Operating Voltage Rating (UL & CSA) (Max) - Main Circuit	600 V
Impulse Withstanding Voltage Rating (IEC)	8000 V
Voltage Rating (CSA)	600 V
Current Rating (CSA)	30 A
Dielectric Test Voltage	2000 V
Short-Time Withstanding Current Rating @ 1s	480 A



Voltage Rating (IEC)	1000 V
Current Rating (UL)	30 A
Current Rating (IEC)	32 A
Voltage Rating	1000 VAC

Body Features

Product Weight	8.2 g[.289 oz]
Primary Product Color	Purple

Termination Features

Termination Method to Wire & Cable	Screw Terminal
------------------------------------	----------------

Mechanical Attachment

DIN Rail Mounting Type	G32, TH35-15, TH35-7.5
Tightening Torque	4.4 in-lbs
Connector Mounting Type	DIN Rail

Housing Features

Housing Material	Polyamide 6.6
------------------	---------------

Dimensions

Main Circuit Capacity - 1 Rigid Stranded Conductor per Screw Clamp	.2 – 4 mm ²
Wire Stripping Length	9.5 mm[.374 in]
Main Circuit Capacity - 1 Flexible Conductor per Spring Clamp	.22 – 4 mm ²
Tool Size	4 mm[.157 in]
Product Depth	40.5 mm
Product Width	6 mm[.235 in]
Product Length	40.5 mm
Product Height	44.5 mm
Rated Cross Section	4 mm ²
Product Spacing	6 mm[.235 in]
Wire Size	4 mm ²

Usage Conditions

Storage Temperature Range	-55 – 110 °C[-67 – 230 °F]
Installation Temperature Range	-5 – 40 °C[23 – 104 °F]
Operating Temperature Range	-55 – 110 °C[-67 – 230 °F]



Operation/Application

Circuit Application	Signal
---------------------	--------

Industry Standards

IP Rating	IP20
UL Flammability Rating	UL 94V-0

Product Compliance


For compliance documentation, visit the product page on [TE.com](#)>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JUNE 2022 (224) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

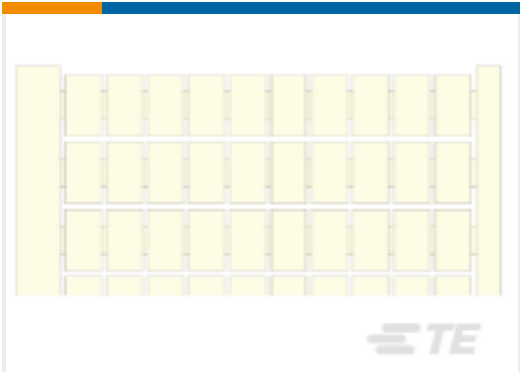

TE Part # 1SNA103775R0000
RC65-BL

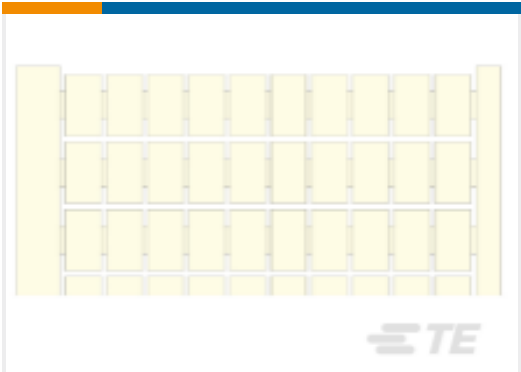

TE Part # 1SNA103776R0100
RC65-RD



TE Part # 1SNA113003R1000
SCM6



TE Part # 1SNA113546R1400
PC6-2



TE Part # 1SNA113548R2600
PC6-10



TE Part # 1SNA114825R0500
SCFM6



TE Part # 1SNA173059R0300
DCJ



TE Part # 1SNA233000R0100
RC610



TE Part # 1SNA007865R2600
FC2



TE Part # 1SNA113550R2400
EIP



TE Part # 1SNA114205R2000
AD2.5



TE Part # 1SNA116795R1100
SCFCV1-2



TE Part # 1SNA118368R1600
FEM6



TE Part # 1SNA118707R0300
SCF6



TE Part # 1SNA163043R2100
AL2



TE Part # 1SNA163261R0000
AL3



TE Part # 1SNA167860R0100
FC4



TE Part # 1SNA173627R2100
EL6




TE Part # 1SNA174781R2500
BJD4



TE Part # 1SNA176663R0000
BJMI6-2


Also in the Series | ENTRELEC SNA

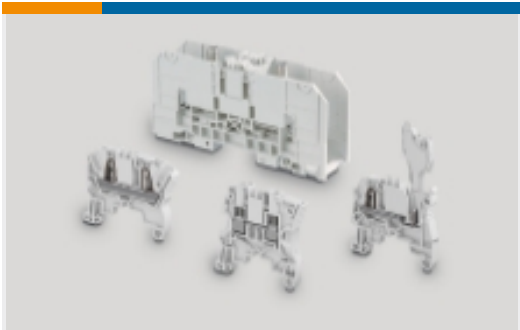

Modular Terminal Blocks(182)



Terminal Block & Strip Conducting Accessories(26)

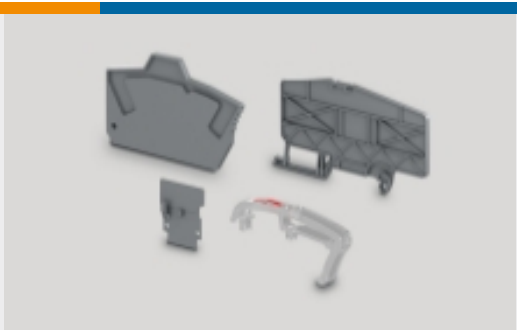

Terminal Block & Strip Insulating Accessories(14)

Customers Also Bought

TE Part #1SNA105001R2700
M4/6

TE Part #1SNA105002R2000
M4/6

TE Part #1SNA105031R1400
M4/6

TE Part #1SNA105032R1500
M4/6

TE Part #1SNA105116R1600
M4/6

TE Part #1SNA105209R1400
M4/6

TE Part #1SNA125116R0100
M4/6.N

TE Part #1SNA195116R0000
M4/6

TE Part #1SNA118368R1600
FEM6

TE Part #1SNA118707R0300
SCF6

Documents

Product Drawings
M4/6

English

CAD Files
Customer View Model
ENG_CVM_CVM_1SNA206404R0500_A2.3d_stp.zip
English
Customer View Model

1SNA206404R0500

Modular Terminal Blocks, Feed-Through, Screw Clamp Terminal Block, Purple, Product Spacing .235 in [6 mm], 2 Position, Screw Terminal, ENTRELEC SNA



[ENG_CVM_CVM_1SNA206404R0500_A2.3d_igs.zip](#)

English

[3D PDF](#)

3D

Customer View Model

[ENG_CVM_CVM_1SNA206404R0500_A2.2d_dxf.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[Catalogue - ENTRELEC terminal-blocks-sna-series](#)

English

[M4/6](#)

English

[ENTRELEC Terminal Blocks Catalogue \(RUS\)](#)