




Connectors > Terminal Blocks & Strips > Modular Terminal Blocks

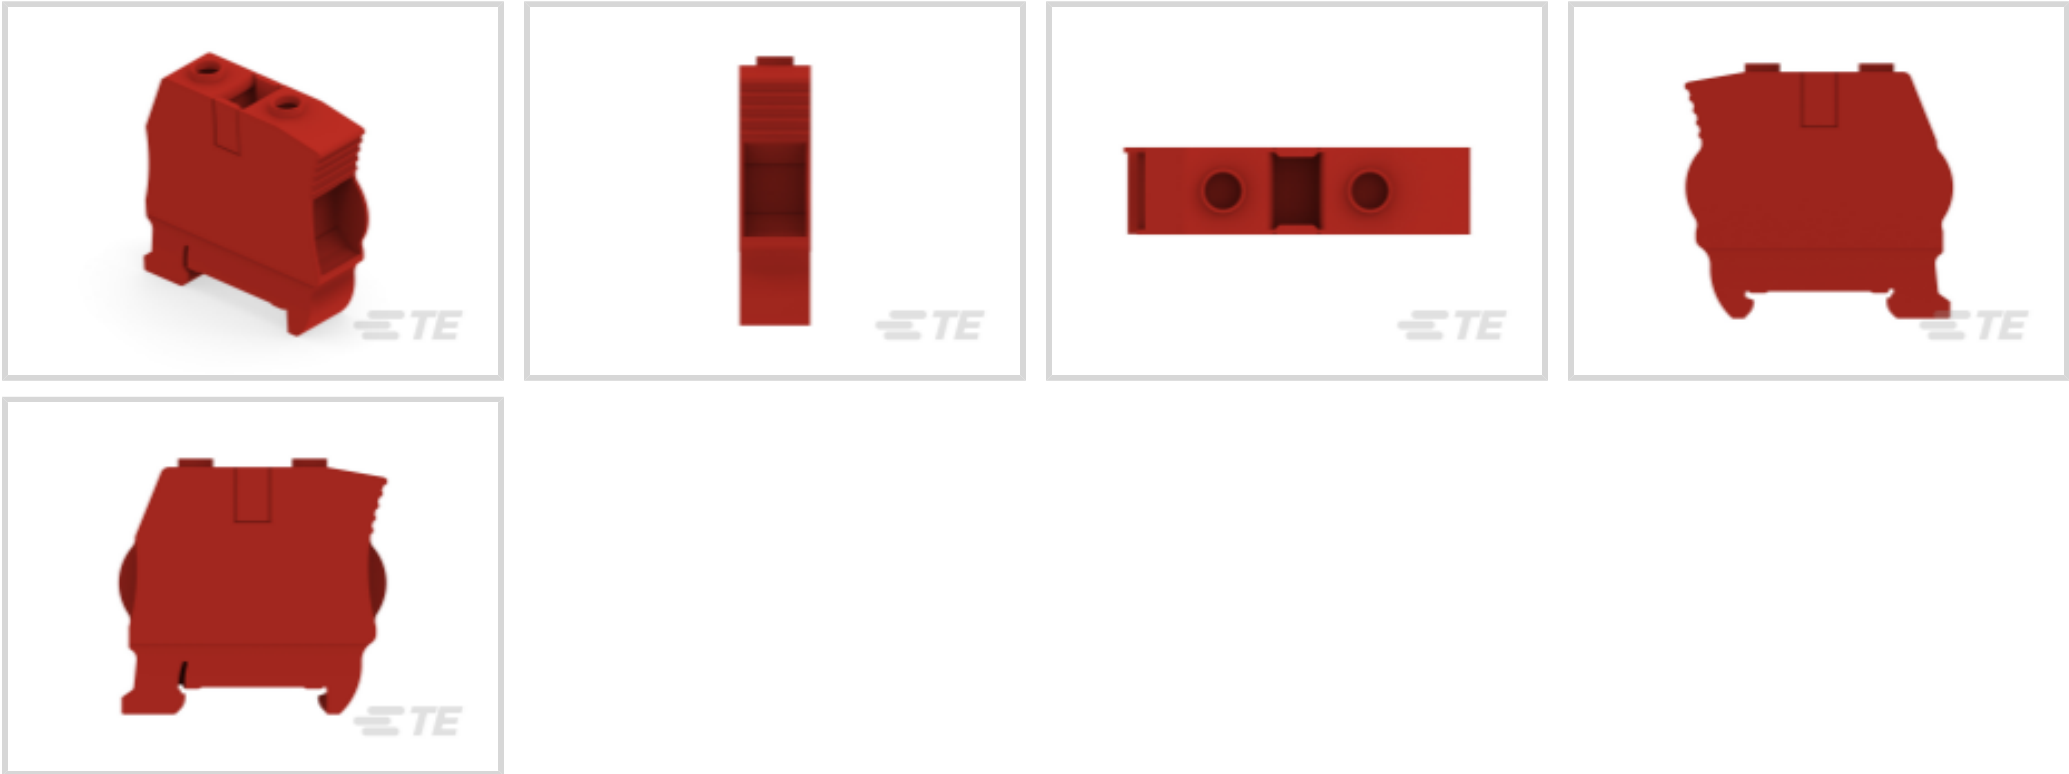

Block Function: **Feed-Through**
Modular Terminal Block Product Type: **Screw Clamp Terminal Block**
Rated Cross Section: **50 mm²**
Primary Product Color: **Red**

Features

Product Type Features

Modular Terminal Block Product Type	Screw Clamp Terminal Block
-------------------------------------	----------------------------

Configuration Features

Gauge Type	Dia.11
Number of Levels	1
Number of Circuits	1
Block Function	Feed-Through
Number of Positions	2

Electrical Characteristics

Impulse Withstanding Voltage Rating (IEC)	8000 V
Current Rating (CSA)	140 A
Power Loss	4.8 W
Short-Time Withstanding Current Rating @ 1s	6000 A
Voltage Rating (IEC)	1000 V
Operating Voltage Rating (UL & CSA) (Max) - Main Circuit	1000 V
Voltage Rating (CSA)	1000 V



Dielectric Test Voltage	2200 V
Current Rating (UL)	140 A
Current Rating (IEC)	150 A

Body Features

Product Weight	52.9 g[2.083 oz]
Primary Product Color	Red

Mechanical Attachment

DIN Rail Mounting Type	TH35-15, TH35-7.5
Connector Mounting Type	DIN Rail

Housing Features

Housing Material	Polyamide
------------------	-----------

Dimensions

Main Circuit Capacity - Twin Ferrule per Screw Clamp	18 – 4 AWG
Main Circuit Capacity - 1 Flexible Conductor per Screw Clamp	1 – 50 mm²
Main Circuit Capacity - 1 Insulated Ferrule per Screw Clamp	18 – 0 AWG
Main Circuit Capacity - 1 Non-Insulated Ferrule per Screw Clamp	1 – 50 mm²
Main Circuit Capacity - 1 Rigid Stranded Conductor per Screw Clamp	18 AWG
Wire Stripping Length	17 mm[.669 in]
Main Circuit Capacity - 2 Rigid Stranded Conductors per Screw Clamp	1 – 25 mm²
Main Circuit Capacity - 2 Flexible Conductors per Screw Clamp	1 – 25 mm²
Tool Size	6.5 mm[.256 in]
Product Depth	60.2 mm
Product Height	63.6 mm
Rated Cross Section	50 mm²
Product Spacing	16 mm[.63 in]

Usage Conditions

Storage Temperature Range	-55 – 110 °C[-67 – 230 °F]
Installation Temperature Range	-5 – 40 °C[23 – 104 °F]
Operating Temperature Range	-55 – 110 °C[-67 – 230 °F]

Industry Standards

UL Flammability Rating	UL 94V-0
------------------------	----------



Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JUNE 2022 (224) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>


Compatible Parts



TE Part # 1SNK140004R0000
MC512-YL

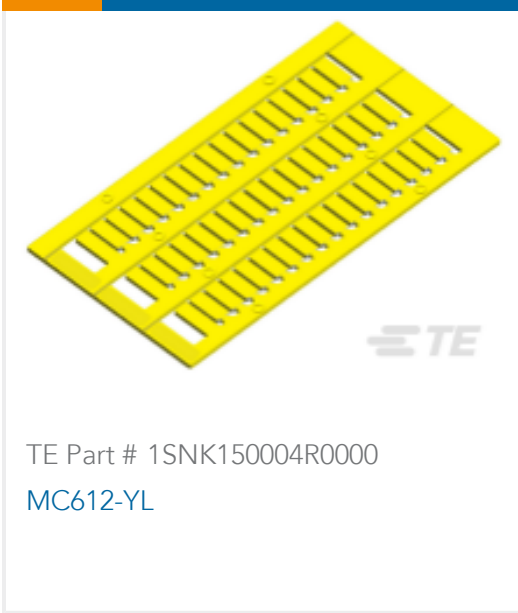


TE Part # 1SNK150004R0000
MC612-YL

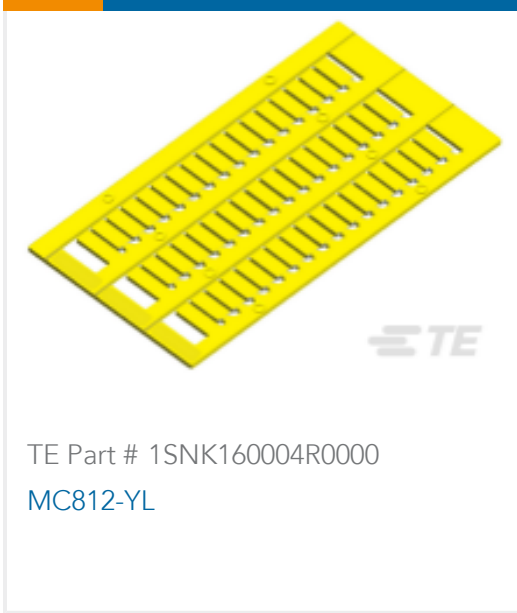


TE Part # 1SNK160004R0000
MC812-YL




TE Part # 1SNK900102R0000
BAZH1

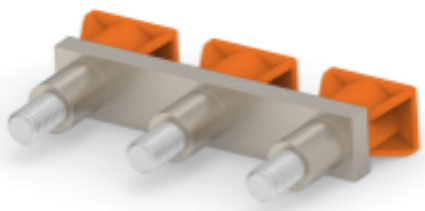


TE Part # 1SNK916303R0000
JB16-3

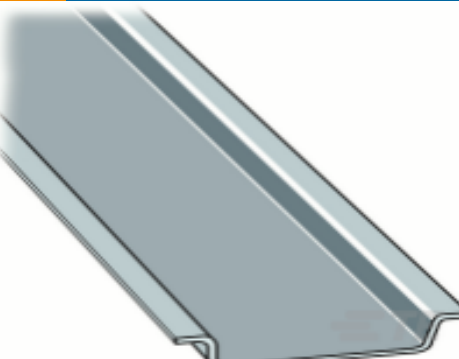


TE Part # 1SNA164800R0300
PR3.G2

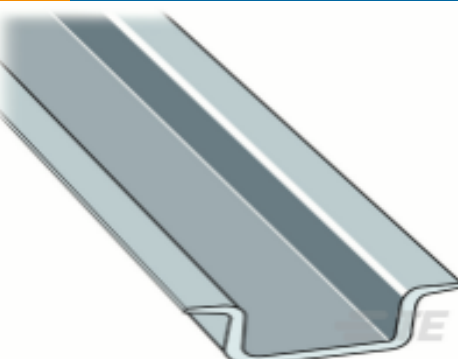


TE Part # 1SNA168500R1200
PR4

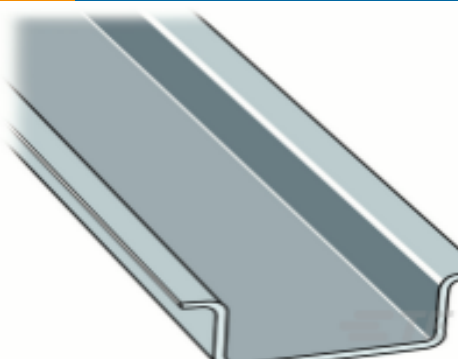


TE Part # 1SNA168700R2200
PR5

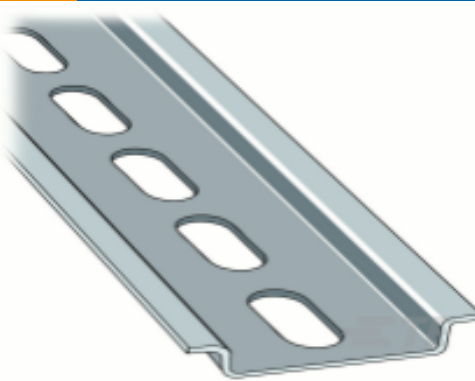


TE Part # 1SNA173220R0500
PR30

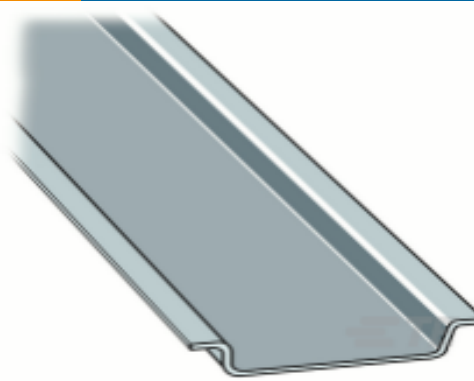

TE Part # 1SNA174300R1700
PR3.Z2

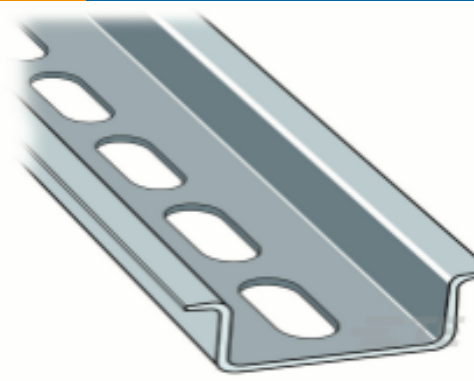


TE Part # 1SNA178529R0400
PR50

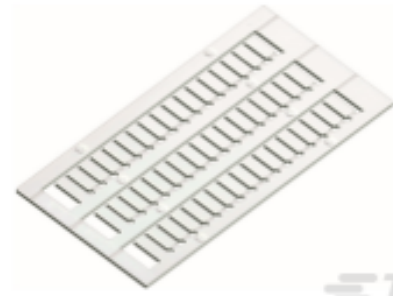

TE Part # 1SNK140000R0000
MC512




TE Part # 1SNK149999R0000
MC512PA

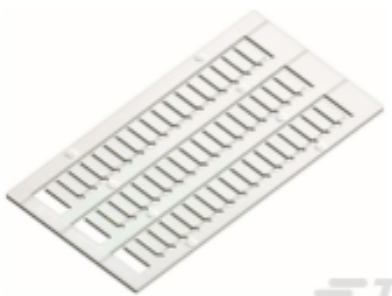

TE Part # 1SNK150000R0000
MC612



TE Part # 1SNK159999R0000
MC612PA

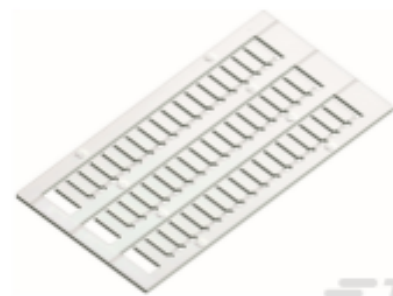

TE Part # 1SNK160000R0000
MC812




TE Part # 1SNK169999R0000
MC812PA



TE Part # 1SNK900611R0000
UMH




TE Part # 1SNK900613R0000
PROCAP8

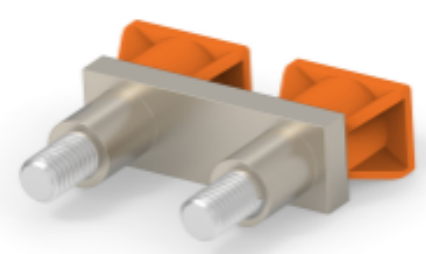

TE Part # 1SNK916302R0000
JB16-2


Also in the Series | ENTRELEC SNK

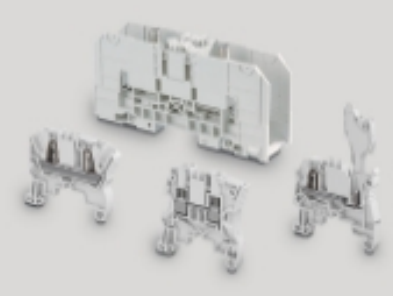

Modular Terminal Blocks(318)



Terminal Block & Strip Conducting Accessories(67)

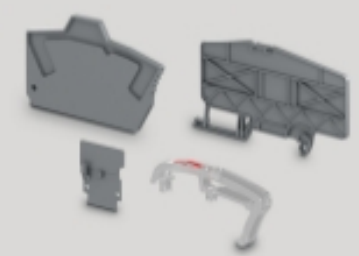


Terminal Block & Strip Insulating Accessories(30)

Customers Also Bought






TE Part #6-104910-4
15 MTE HDR SRST LATCH .100CL

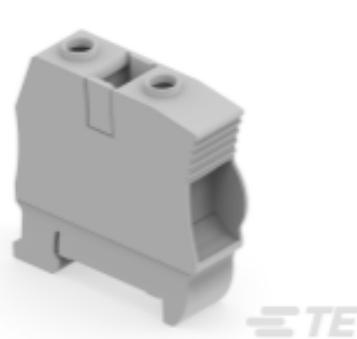


TE Part #1SNK516010R0000
ZS35

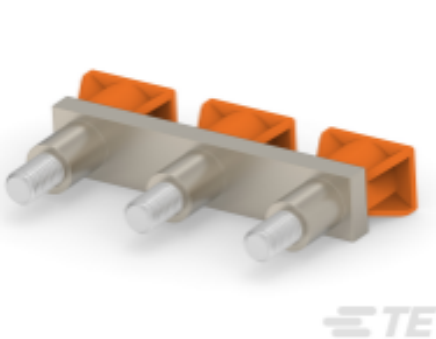


TE Part #1SNK916303R0000
JB16-3



TE Part #4-644615-4
14P MTA156 POL HDR ASSY LF




TE Part #1SNK510020R0000
ZS16-BL



TE Part #1SNK516020R0000
ZS35-BL



TE Part #1SNK516064R0000
ZS50-BK



TE Part #1SNK522010R0000
ZS70

TE Part #2317747-1
IBM 01LT603

Documents

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1SNK516063R0000_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1SNK516063R0000_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1SNK516063R0000_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Datasheets & Catalog Pages

ENTRELEC Terminal Block - Master Catalog

English

ZS50-RD

English

1SNK516063R0000

Modular Terminal Blocks, Feed-Through, Screw Clamp Terminal Block, Red, Product
Spacing .63 in [16 mm], 2 Position, DIN Rail, ENTRELEC SNK



SNK SERIES TERMINAL BLOCKS

English

Agency Approvals

ZK-ZS_ATEX_1SND225112U1006-C-TE

English