



Connectors > Terminal Blocks & Strips > Modular Terminal Blocks



Block Function: **Feed-Through & Ground**

Modular Terminal Block Product Type: **PI-Spring Terminal Block**

Rated Cross Section: **2.5 mm²**

Primary Product Color: **Gray**

Features

Product Type Features

Modular Terminal Block Product Type	PI-Spring Terminal Block
-------------------------------------	--------------------------

Configuration Features

Gauge Type	A2 / 2.3 mm Dia.
Number of Levels	3
Number of Circuits	3
Block Function	Feed-Through & Ground
Number of Positions	6

Electrical Characteristics

Impulse Withstanding Voltage Rating (IEC)	8000 V
Current Rating (CSA)	20 A
Power Loss	1.6 W
Short-Time Withstanding Current Rating @ 1s	300 A
Voltage Rating (IEC)	500 V
Operating Voltage Rating (UL & CSA) (Max) - Main Circuit	300 V
Voltage Rating (CSA)	300 V
Dielectric Test Voltage	2000 V
Current Rating (UL)	20 A
Current Rating (IEC)	22 A



Body Features

Product Weight	21.38 g[.842 oz]
Primary Product Color	Gray

Mechanical Attachment

DIN Rail Mounting Type	TH35-15, TH35-7.5
Connector Mounting Type	DIN Rail

Housing Features

Housing Material	Polyamide
------------------	-----------

Dimensions

Main Circuit Capacity - 1 Rigid Stranded Conductor per Spring Clamp	.2 – 4 mm²
Main Circuit Capacity - Twin Ferrule per Spring Clamp	.22 – .5 mm²
Main Circuit Capacity - 1 Flexible Conductor per Spring Clamp	.22 – 2.5 mm²
Wire Stripping Length	11 mm[.433 in]
Main Circuit Capacity - 1 Non-Insulated Ferrule per Spring Clamp	.22 – 2.5 mm²
Main Circuit Capacity - 1 Insulated Ferrule per Spring Clamp	26 – 14 AWG
Tool Size	3.5 mm[.138 in]
Product Depth	73.34 mm
Product Length	73.34 mm
Product Height	101.9 mm
Rated Cross Section	2.5 mm²
Product Spacing	5.2 mm[.205 in]

Usage Conditions

Storage Temperature Range	-55 – 110 °C[-67 – 230 °F]
Installation Temperature Range	-5 – 40 °C[23 – 104 °F]
Operating Temperature Range	-55 – 110 °C[-67 – 230 °F]

Industry Standards

IP Rating	IP20
UL Flammability Rating	UL 94V-0

Product Compliance

For compliance documentation, visit the product page on [TE.com](#)>

EU RoHS Directive 2011/65/EU	Compliant
------------------------------	-----------





EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JUNE 2022 (224) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

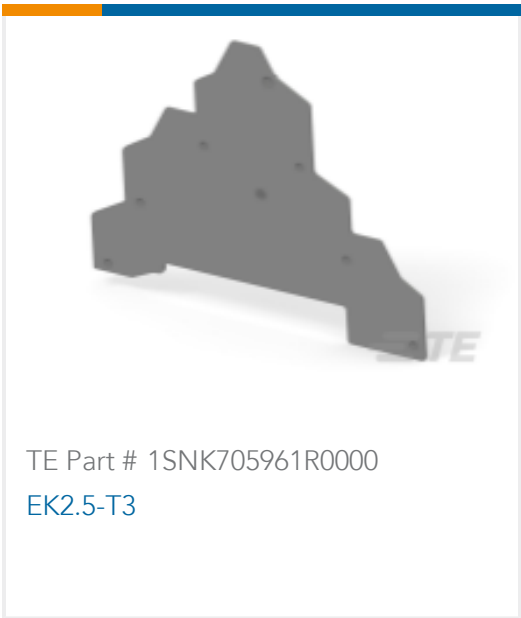
 TE Part # 1SNK140004R0000 MC512-YL	 TE Part # 1SNK705961R0000 EK2.5-T3	 TE Part # 1SNK900102R0000 BAZH1	 TE Part # 1SNK900203R0000 TP2
 TE Part # 1SNK900606R0000 LH-J	 TE Part # 1SNK905302R0000 JB5-2	 TE Part # 1SNK905303R0000 JB5-3	 TE Part # 1SNA164800R0300 PR3.G2

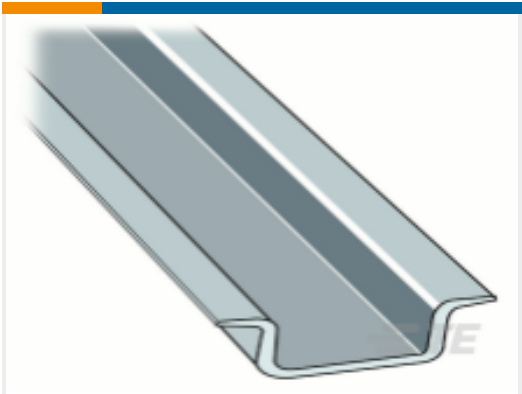


TE Part # 1SNA168500R1200
PR4

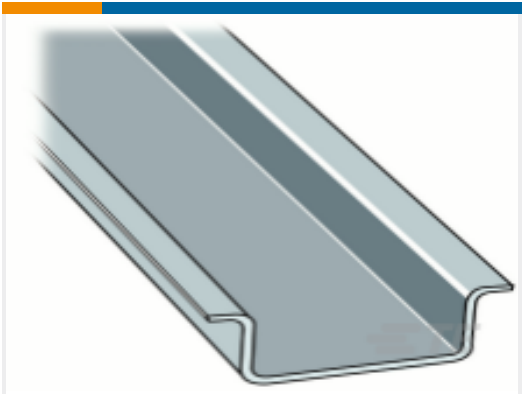

TE Part # 1SNA168700R2200
PR5

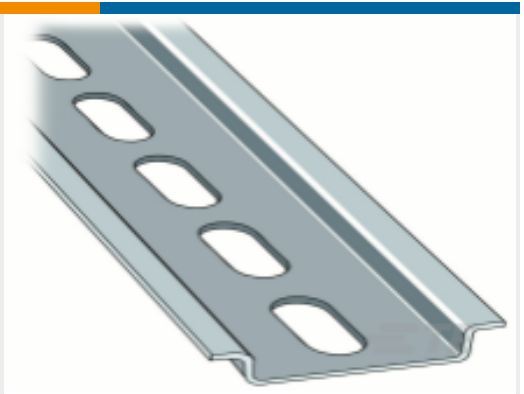

TE Part # 1SNA173220R0500
PR30

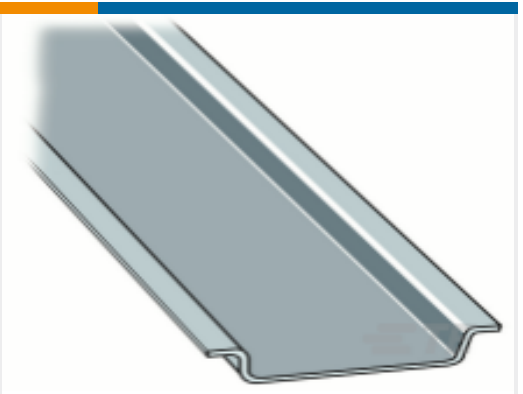

TE Part # 1SNA174300R1700
PR3.Z2



TE Part # 1SNA178529R0400
PR50



TE Part # 1SNK140000R0000
MC512



TE Part # 1SNK149999R0000
MC512PA



TE Part # 1SNK900200R0000
TC5



TE Part # 1SNK900201R0000
TC5-R1



TE Part # 1SNK900205R0000
TP4



TE Part # 1SNK900609R0000
PROCAP5



TE Part # 1SNK900611R0000
UMH

Also in the Series | ENTRELEC SNK



Modular Terminal Blocks(318)



Terminal Block & Strip Conducting
Accessories(67)



Terminal Block & Strip Insulating
Accessories(30)

Customers Also Bought



TE Part #T1430240000-000
H24B-AD-BO



TE Part #1SNK705210R0000
ZK2.5-D2



TE Part #T0931000423-000
CODING-PIN-M3-TM



TE Part #T0931006524-000
CODING-PIN-M3-TF



TE Part #T1750101132-000
H10B-TBFHS-M32

TE Part #T2070104201-000
H10BN-T3-F

TE Part #1SNA199095R1300
ML10/13.SF

TE Part #1SNK508412R0000
ZS4-SF1-R1

TE Part #1SNA179535R2300
BRT125A

TE Part #1SNA199635R2400
FEM13U

Documents

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1SNK705513R0000_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1SNK705513R0000_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1SNK705513R0000_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

ENTRELEC Terminal Block - Master Catalog

English

ZK2.5-L-N-PE

English

SNK SERIES TERMINAL BLOCKS

English

Essential Entrelec Terminal Blocks

French

Essential Entrelec Terminal Blocks

English

Agency Approvals

1SNK705513R0000

Modular Terminal Blocks, Feed-Through & Ground, PI-Spring Terminal Block, Gray,
Product Spacing .205 in [5.2 mm], 6 Position, DIN Rail, ENTRELEC SNK



Agency Approval Document

English