



## Overview

VISUAL SIGNALS - INDUSTRIAL - LED ECO BEACONS 30mm

The LED Mini Tower Light modules are ideally suited for status indication in light commercial signalling applications where a low cost, compact and local signal is required. These Beacons are of the continuous (Static Mode) type (Single Stage Alarm) and once the Beacon is energised, the LED's stay permanently on.

An advantage to this type of operation, is that it can be controlled via a remote source (Control Panel or PLC etc) giving this Beacon greater flexibility by offering a Second Stage Alarm (Flashing). The design is modular and easily assembled. The units assemble using a twist lock system allowing for quick and easy assembly. All colour modules are supplied with quick fix terminations via an IDC lead that simply push into a male terminal to make the connection.

Two mounting options are available: Mounting Foot & 100mm Pole or a Side Fix Bracket with 100mm Pole. Each Base is supplied with a 30cm flying lead.

*If you require a bigger version, please refer to our LED-TLM Datasheet.*

## Features

- Continuously rated
- Static
- Economical
- Suitable for pole mounting
- Optional accessories - See accessories on page 2
- 360° light output around the vertical axis
- Available in 12-24vDC

## Material

- UV Stable Polycarbonate Lens
- UV Stable ABS Plastic Base

IP 65

8 SMT LED

-25 to +60°C

\*Flashes Per Minute

## APPROVALS & CONFORMITIES



✉ [uksales@moflash.co.uk](mailto:uksales@moflash.co.uk)  
[moflashkm@moflash.com](mailto:moflashkm@moflash.com)  
[exportsales@moflash.co.uk](mailto:exportsales@moflash.co.uk)

📍 11 Upper Conybere Street  
 Highgate, Birmingham  
 B12 0EB, England

🌐 [www.moflash.com](http://www.moflash.com)

☎ UK +44(0)121 446 5322  
 FR +33(0)1 70 72 12 71


## Ordering Information

Voltage	Ordering Information			Mode & Current Consumption
Voltage Range	Amber	Red	Green	Static
12-24vDC	LED-MINI-02-01	LED-MINI-02-02	LED-MINI-02-04	54mA @24vDC

Effective Candela (Cd) - Formula Blondel-Rey		
Amber	Red	Green
1.2	1.1	3.2

## Weights & Dimensional Drawings

Kg	LED Module	BR100	FT100
Net Weight	0.011	0.140	0.086
Gross Weight	0.020	0.144	0.090

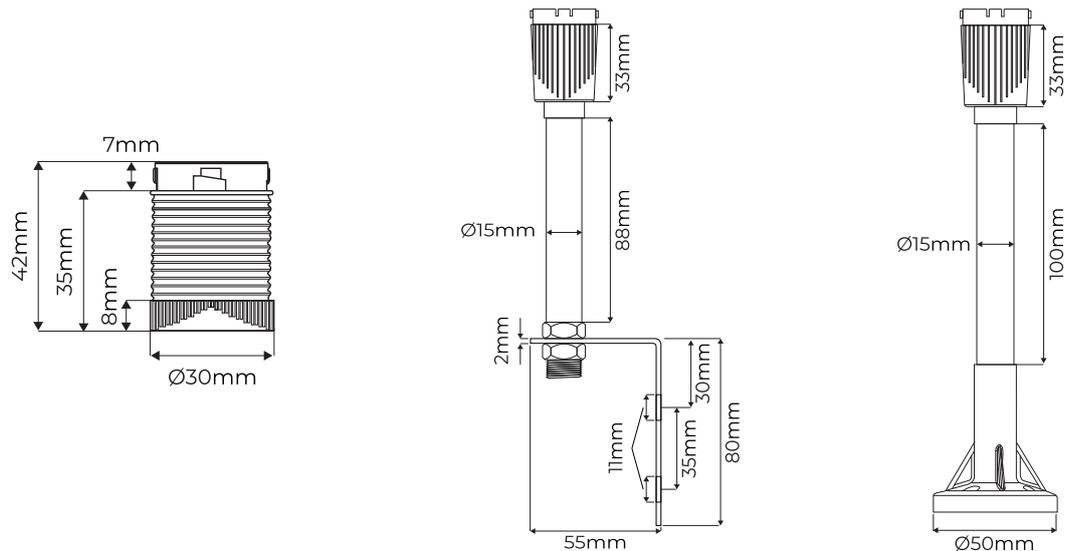

## Accessories

Part Code	Description
LED-MINI-BR100	LED MINI Tower Module Base & Side Fix Bracket (100mm Pole Length)
LED-MINI-FT100	LED MINI Tower Module Base, Pole & Foot (100mm Pole Length)



LED-MINI-BR100



LED-MINI-FT100

## APPROVALS & CONFORMITIES

