



## Overview

### VISUAL SIGNALS - INDUSTRIAL - LED BEACONS

The LED201/200 series are suitable for security, process control & industrial applications, where low maintenance and long life are the pre-requisite requirements. With 144 high brightness LED's, this Beacon produces a powerful, concentrated light output that ensures it can be used for visual signalling over greater distances.

3 modes of operation are available which are selectable via a two-way DIP switch located on the PCB:

1. **Static** mode
2. **Flashing** mode at 1Hz (60 FPM)
3. **Rotating** mode: Single column or Double column

An advantage of the static mode is that it can be controlled via a remote source (ie. control panel / plc etc) offering the potential of a remote flashing option. The design allows for termination inside the enclosure through the base.

*If you require a different mounting Base option, please refer to our LED401/400 Datasheet.*

## Features

- Continuously rated
- Flashing, Static or Rotating
- Low current consumption
- Suitable for surface, wall or conduit box mounting
- Optional wall bracket - See accessories on page 2
- 2 point fix
- 360° light output around the vertical axis
- Available in 24vDC and 85-280vAC/DC

## Material

- UV Stable Polycarbonate Lens
- UV Stable ABS Plastic Base

**IP** 65

 144 SMT LED

 60 FPM\*

 140 RPM\*\*

 -25 to +55°C

 50/60Hz

\*Flashes Per Minute

\*\*Rotation Per Minute

## APPROVALS & CONFORMITIES




## Ordering Information

Voltage		Ordering Information				Mode & Current Consumption			
Voltage Range	Amber	Red	Blue	Green	Clear	Flashing	Static	Rotating 1 Column	Rotating 2 Column
24vDC	LED201-02-01	LED201-02-02	LED201-02-03	LED201-02-04	LED201-02-05	280mA @24vDC	527mA @24vDC	53mA @24vDC	100mA @24vDC
85-280vAC/DC	LED200-04-01	LED200-04-02	LED200-04-03	LED200-04-04	LED200-04-05	31mA @230vAC	57mA @230vAC	16mA @230vAC	31mA @230vAC


Effective Candela (Cd) - Formula Blondel-Rey				
Amber	Red	Blue	Green	Clear
79.67	66.81	12.05	39.61	122.22

## Weights & Dimensional Drawings

Kg	24v	230v
Net Weight	0.446	0.486
Gross Weight	0.513	0.553

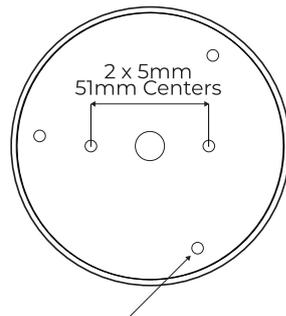

3 holes x 96 PCD to accept No 6 self tap screw (external fitting)

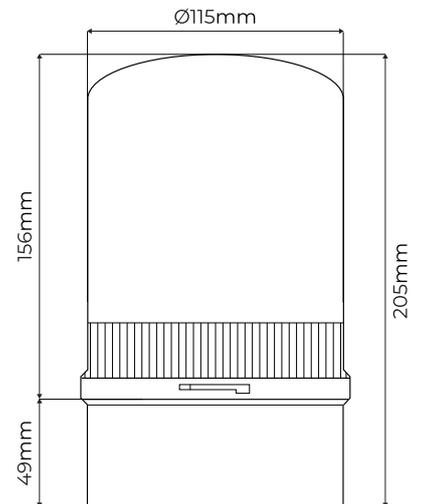

## Accessories

Part Code	Description
50010	Cage Guard - Suitable for use with the 200/400/500 Series Beacon range ( <b>Cannot be fitted with Wall Bracket</b> )
50004	Angled Wall Bracket - Suitable for use with the 200/400/500 Series Beacon range ( <b>Cannot be fitted with Cage guard</b> )
50064	Amber Lens - Suitable for use with the 200/400/500 Series Beacon range.
50065	Red Lens - Suitable for use with the 200/400/500 Series Beacon range.
50066	Blue Lens - Suitable for use with the 200/400/500 Series Beacon range.
50067	Green Lens - Suitable for use with the 200/400/500 Series Beacon range.
50068	Clear Lens - Suitable for use with the 200/400/500 Series Beacon range.



50010



50004



50064



50065



50066



50067



50068

## APPROVALS & CONFORMITIES

