

Rusko

Symmetric Post Top,33/41/48/58W,8200lm,141lm/W,3
CCT 2200/3000/4000K,IP66,IK08,On/Off,Dark Grey





ID: 0003010030

GTIN: 7630268420994

5 YEARS WARRANTY



Technical Data	
Rated luminous flux according to IEC 62722-2- 1:	4730...8200 lm
Luminaire efficacy:	141 lm/W
Colour temperature:	2200...4000 K
Colour rendering index CRI:	80-89
Beam angle:	> 80° - Extreme wide beam
Light distribution:	Symmetric
Stroboscope effect value SVM:	0.4
Flickering value Pst LM:	1
With control gear:	yes
Energy efficiency class of the light source according to EU regulation 2019/2015:	D
Protection class according to IEC 61140:	II
Nominal voltage:	220...240 V
Nominal current:	150...260 mA
Max. system power:	63.8 W
Power factor:	0.9
Max. number of luminaires per miniature circuit breaker B16 (MCB):	12
Max. number of luminaires per miniature circuit breaker C16 (MCB):	20
Connection type:	Other
Rated lifetime L70/B50 at 25 °C:	160000 h
Impact strength:	IK08
Degree of protection (IP):	IP66
Housing material:	Aluminium
Housing colour:	Grey
Height/depth:	410 mm
Diameter:	395 mm
With movement sensor:	no
With light sensor:	no
Material cover:	Plastic, transparent
Type of luminaire:	Bollard luminaire
Type of control gear:	LED operating device current-controlled
Light distributor:	Refractor lens
Colour of light:	White
Light outlet:	Indirect
Colour of light adjustable:	Positions

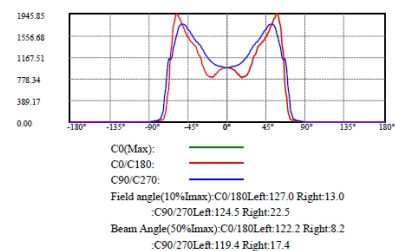

Additional Information

SDCM(ANSI):
5 (@2200K,4000K)
SDCM(self centered):
4(@2200K,4000K),5(@3000K)
Dimmable: No
Replaceable lightsource(EPREL): YES
Photobiological safety EN62471: RG1
Rated ambient temperature according to IEC 62722-2-1: -40°C +50°C
Filament test IEC 60695-2-11: 750°C
Number of switching cycles: 50000
Total harmonic distortion: ≤20%
Frequency(Hz): 50/60Hz
Rated life time L80/B10 at 25°C : 100,000H
Certification/Norms: CE,ERP, ROHS, REACH
Net weight(kg): 3.6
Gross weight with packaging(kg): 5.7
Accessories included in the packaging: Screw*4pcs