# Symmetric Slim Floodlight

## Symmetric Slim Floodlight,30W,IK07,IP65,3600lm,120 lm/w,3CCT 3000K/4000K/6500K,On/off, Black

**Model No.:**
**SGSO Sku:** **0017440195**
**GTIN/EAN:** **7630268418205**

| | |
|---|---|
| Suitable for surface mounting: | Yes |
| Suitable for wall mounting: | Yes |
| Suitable for pedestal/floor mounting: | Yes |
| Adjustability: | Swivelling |
| Lamp type: | LED not exchangeable |
| Suitable for number of light sources: | 1 |
| Housing material: | Aluminium |
| Surface protection: | Powder coating |
| Housing colour: | Grey |
| Material cover: | Glass matt/satinized |
| Voltage type: | AC |
| Nominal voltage: | 220 ... 240 V |
| Type of control gear: | LED operating device current-controlled |
| No dim function: | Yes |
| Reflector: | High-gloss |
| Light sharing: | Symmetric |
| Reflector colour: | White |
| Beam angle: | Extreme wide beam >80° |
| Light outlet: | Direct |
| Energy efficiency class of the light source according to EU regulation 2019/2015: | D |
| Rated life time L70/B50 at 25 °C: | 100000 h |
| Degree of protection (IP): | IP65 |
| Impact strength: | IK07 |
| Protection class: | I |
| Rated ambient temperature according to IEC 62722-2-1: | -20 ... 40 °C |
| Max. system power: | 30 W |
| Colour of light: | White |
| Colour temperature: | 3000 ... 6500 K |
| Colour rendering index CRI: | 80-89 |
| Rated luminous flux according to IEC 62722-2-1: | 3600 lm |
| Power factor: | 0.9 |
| Flickering value Pst LM: | 1 |
| Colour of light adjustable: | Positions |
| Width: | 125 mm |
| Height/depth: | 28 mm |
| Length: | 160 mm |
| Type of wiring: | Ending |
| Conductor cross section: | 1 $mm^2$ |
| Connection type: | Other |
| Luminaire efficacy: | 120 lm/W |
| Photobiological safety according to EN 62471: | RG1 |
| Colour consistency (McAdam ellipse): | SDCM5 |
| Unified Glare Ratio (UGR): | 31 |






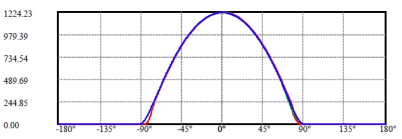


C135(Max):
C0/C180:
C90/C270:
Field angle(10%Imax):C0/180Left:77.6 Right:79.6
:C90/270Left:80.4 Right:80.2
Beam Angle(50%Imax):C0/180Left:57.6 Right:59.3
:C90/270Left:58.2 Right:58.4