



Jumper




Symmetric Slim Floodlight, 30W, IK07, IP65, 3600lm, 120 lm/w, 3CCT 3000K/4000K/6500K, HF sensor

Model No.:

SGSO Sku: 0017440199

GTIN/EAN: 7630268418243

Suitable for surface mounting:	Yes
Suitable for wall mounting:	Yes
Suitable for pedestal/floor mounting:	Yes
Adjustability:	Swivelling
With movement sensor:	Yes
Lamp type:	LED not exchangeable
Housing material:	Aluminium
Surface protection:	Powder coating
Housing colour:	Grey
Material cover:	Glass matt/satinized
Voltage type:	AC
Nominal voltage:	220 ... 240 V
Type of control gear:	LED operating device current-controlled
With control gear:	Yes
No dim function:	Yes
Reflector:	High-gloss
Light distributor:	Reflector
Light sharing:	Symmetric
Reflector colour:	White
Beam angle:	Extreme wide beam >80°
Light outlet:	Direct
Energy efficiency class of the light source according to EU regulation 2019/2015:	D
Rated life time L70/B50 at 25 °C:	100000 h
Degree of protection (IP):	IP65
Impact strength:	IK07
Protection class:	I
Rated ambient temperature according to IEC 62722-2-1:	-20 ... 40 °C
Suitable for lamp power:	30 W
Max. system power:	30 W
Colour of light:	White
Colour temperature:	3000 ... 6500 K
Colour rendering index CRI:	80-89
Rated luminous flux according to IEC 62722-2-1:	3600 lm
Power factor:	0.9
Flickering value Pst LM:	1
Colour of light adjustable:	Positions
Width:	223 mm
Height/depth:	28 mm
Length:	160 mm
Type of wiring:	Ending
Number of poles:	3
Conductor cross section:	1 mm ²
Connection type:	Other
Luminaire efficacy:	120 lm/W
Photobiological safety according to EN 62471:	RG1
Colour consistency (McAdam ellipse):	SDCM5
Unified Glare Ratio (UGR):	31

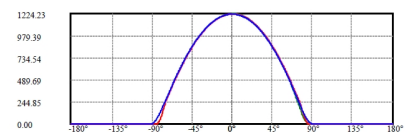

C 135(Max):
 C0/C 180:
 C90 C 270:
 Field angle(10%Imax):C0 180Left:77.6 Right:79.6
 :C90 270Left:80.4 Right:80.2
 Beam Angle(50%Imax):C0 180Left:57.6 Right:59.3
 :C90 270Left:58.2 Right:58.4