Drago

Tri-proof,1.2M,16/21.5/26.5/32W,IP65IK10F,30/35/40 K,2560/3440/4240/5120lm,160lm/W,On/Off,Grey

ID: 0028920285


GTIN: 7630268421021


3000K 3500K 4000K | 16W 21.5W 26.5W 32W | BA 110° | 100000H L80 | CRI >80 | IP65 | IK08 IK10

5 YEARS WARRANTY

Technical Data	
Rated luminous flux according to IEC 62722-2- 1:	2560...5120 lm
Luminaire efficacy:	160...160 lm/W
Colour temperature:	3000...4000 K
Colour rendering index CRI:	80-89
Colour consistency (McAdam ellipse):	SDCM4
Unified Glare Ratio (UGR):	28
Beam angle:	> 80° - Extreme wide beam
Light distributor:	Other
Energy efficiency class of the light source according to EU regulation 2019/2015:	C
Protection class according to IEC 61140:	I
Nominal voltage:	220...240 V
Nominal current:	154...154 mA
Max. system power:	32 W
Power factor:	0.9
Max. number of luminaires per miniature circuit breaker B16 (MCB):	21
Max. number of luminaires per miniature circuit breaker C16 (MCB):	36
Connection type:	Plug-in connector for plug-in building installation
Rated lifetime L70/B50 at 25 °C:	100000 h
Impact strength:	IK08
Degree of protection (IP), rear side:	IP65
Degree of protection (IP), front side:	IP65
Rated ambient temperature according to IEC 62722-2-1:	-30...40 °C
Filament test according to IEC 60695-2-11:	850 °C - 30 s
Photobiological safety according to EN 62471:	RG0
Covering of the luminaire with thermally insulating material possible:	no
Housing material:	Plastic
Length:	1200 mm
Width:	96 mm
Height/depth:	82 mm
Suitable for emergency lighting:	no
With movement sensor:	no
With light sensor:	no
With control gear:	yes
Type of control gear:	LED operating device current-controlled





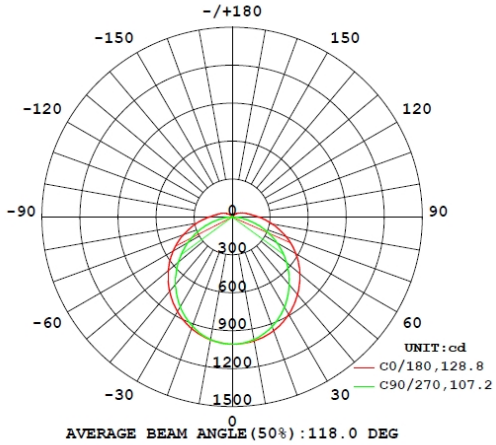

Additional Information

Driver included: Yes
Driver internal or external: internal
Type of LED driver: Non-isolated
Number of driver: 1pc
Mounting method: Surface and suspended
Cable connection details(method, qty, diameter):push in clamp,5X2.5mm2 Certification/
Norms: CE/Rohs/Reach/ErP
Net weight(kg):1.8kg
Gross weight with packaging(kg):2.0kg
Accessories included in the packaging:Yes
Frequency(Hz): 50/60
Number of luminaires on a 10A MCB type B: 13
Number of luminaires on a 10A MCB type C:22
Rated life time L80/B10 at 25°: 100000h
SDCM(self-centered): <4
Material cover: PC
Reflector material:NA
Optical material:NA
Fastener material: 316 stainless steel
Lens colour:NA
Emergency power supply integrated:No
Dimmable:NA
Dimming method:NA
Luminaire with limited surface temperature, sign "D" according to EN 60598-2-24:Yes