



# BORNEO

Backlit  
Panel,6060,32W,4000K,3520lm,UGR19,W/Driver,  
On/off, W/O Box, W/O Quick connect


ID: 0028920207

GTIN: 7630268416775


5 YEARS + WARRANTY




Technical Data	
Luminous flux(lm)	3520
Efficiency(lm/W)	110
Color temperature(K)	4000
CRI	80-89
MacAdam step(SDCM)	5
Unified Glare Ratio(UGR)	19
Beam angle	Extreme wide beam>80°
Light distributor / Optic	Diffuser lens/optic,panel
Energy class	E
Protection Class	II
Voltage(V)	220...240
Frequency(Hz)	50/60
Input current(mA)	850
Power(W)	32
Power factor	0.9
Number of luminaires on a 10A MCB type B	9
Number of luminaires on a 10A MCB type C	24
Number of luminaires on a 16A MCB type B	17
Number of luminaires on a 16A MCB type C	42
Connection type	Push-in clamp
Plug type	None
Lifetime L70B50(h)	100000
Lifetime L80B10(h)	50000
IK	IK02
IP	IP20
Operating temperature	-20...40°
Filament test IEC 60695-2-11	650°C-30s
Photobiological safety EN62471	RG0
Covering of the luminaire with thermally insulating material possible	NO
Housing material	Aluminum
Housing color	White
Length(mm)	595
Width(mm)	595
Height(mm)	32



On/Off Driver Included



LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

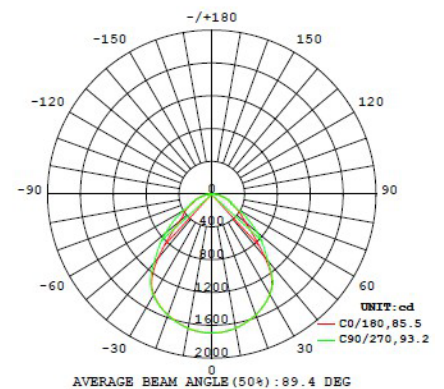

### Additional Information

Driver included:	Yes
Type of LED driver:	On/Off
Number of driver:	1
Mounting method:	Ceiling mounting Built-in mounting
Cable connection details(qty, diameter, etc.):	2*1.5mm <sup>2</sup>
LMS Protocol (when it's DALI):	None
Number of DALI address (when it's DALI):	None
Certification/Norms:	CE/RoHs/Reach/ERP
Net weight(kg):	1.6
Gross weight with packaging(kg):	2.2
Accessories included in the packaging:	Driver