


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:231.05V I:0.0347A P:7.2336W PF:0.9023 Freq:50.00Hz Lamp Flux:925.361x1 lm		
NAME: 0017440214	TYPE:	WEIGHT:
SPEC.:7.5W 3000K 850lm	DIM.:	SERIAL No.:
MFR.: LIT by CARDI	SUR.:0.025717385	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 127.93 lm/W			
MODEL	3000K	I _{max} (cd)	336.8	S/MH (C0/180)	1.23
NOMINAL POWER (W)	7.5	LOR (%)	100.0	S/MH (C90/270)	1.24
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	925.36	η UP, DN (C0-180)	0.5, 49.8
NOMINAL FLUX (lm)	925.361	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.3, 49.5
LAMPS INSIDE	1	η up (%)	0.8	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	230	η down (%)	99.2	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

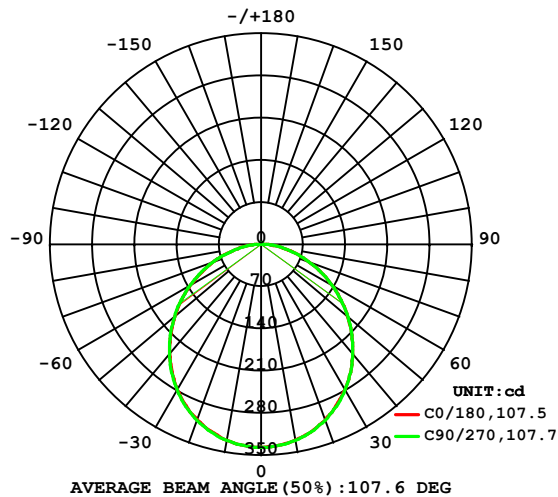

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

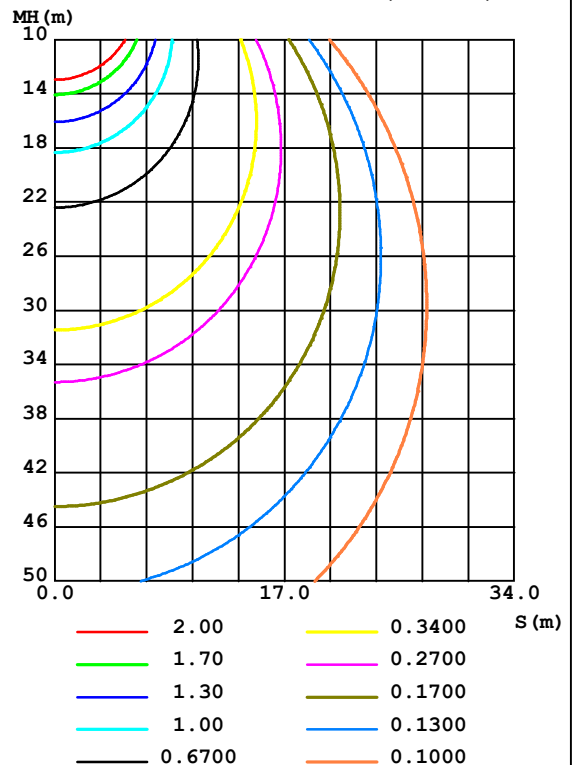

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2025-02-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity: 65.0%
Test Distance: 12.800m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	329.7	329.7	330.2	330.1	330.1	329.9	330.3	330.3	0- 10	31.82	31.82	3.44,3.44
20	310.4	310.1	310.7	310.8	310.1	310.3	310.9	311.0	10- 20	90.80	122.6	13.3,13.3
30	278.6	278.4	279.1	278.9	278.3	278.7	279.2	279.2	20- 30	136.4	259.0	28,28
40	236.9	236.3	237.2	236.8	236.0	236.6	237.2	237.1	30- 40	161.9	420.9	45.5,45.5
50	188.1	187.7	188.4	188.1	187.2	187.6	188.2	188.1	40- 50	164.3	585.2	63.2,63.2
60	136.1	135.4	136.1	135.7	135.0	135.4	135.7	135.7	50- 60	144.8	730.0	78.9,78.9
70	84.40	83.84	83.83	83.65	82.52	82.88	82.61	82.78	60- 70	108.2	838.2	90.6,90.6
80	37.33	36.89	36.53	36.27	35.58	35.89	35.23	35.65	70- 80	62.43	900.6	97.3,97.3
90	0.5265	0.5208	0.5119	0.5225	0.1555	0.1521	0.1488	0.1520	80- 90	17.70	918.3	99.2,99.2
100	0.7546	0.7613	0.7618	0.7600	0.2721	0.2670	0.2636	0.2654	90-100	0.4486	918.8	99.3,99.3
110	1.071	1.088	1.084	1.084	0.4511	0.4394	0.4394	0.4360	100-110	0.6703	919.4	99.4,99.4
120	1.403	1.405	1.410	1.405	0.6861	0.6656	0.6643	0.6625	110-120	0.8884	920.3	99.5,99.5
130	1.706	1.707	1.716	1.707	0.9696	0.9375	0.9445	0.9443	120-130	1.058	921.4	99.6,99.6
140	1.961	1.969	1.963	1.959	1.274	1.254	1.257	1.260	130-140	1.137	922.5	99.7,99.7
150	2.164	2.169	2.162	2.164	1.603	1.578	1.568	1.585	140-150	1.090	923.6	99.8,99.8
160	2.307	2.304	2.296	2.299	1.955	1.914	1.904	1.917	150-160	0.9220	924.5	99.9,99.9
170	2.385	2.385	2.375	2.383	2.186	2.160	2.156	2.171	160-170	0.6208	925.1	100,100
180	2.368	2.356	2.355	2.360	2.377	2.356	2.360	2.361	170-180	0.2210	925.4	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-02-18

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:12.800m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:231.05V I:0.0347A P:7.2336W PF:0.9023 Freq:50.00Hz Lamp Flux:925.361x1 lm		
NAME: 0017440214	TYPE:	WEIGHT:
SPEC.:7.5W 3000K 850lm	DIM.:	SERIAL No.:
MFR.: LIT by CARDI	SUR.:0.025717385	Shielding Angle:

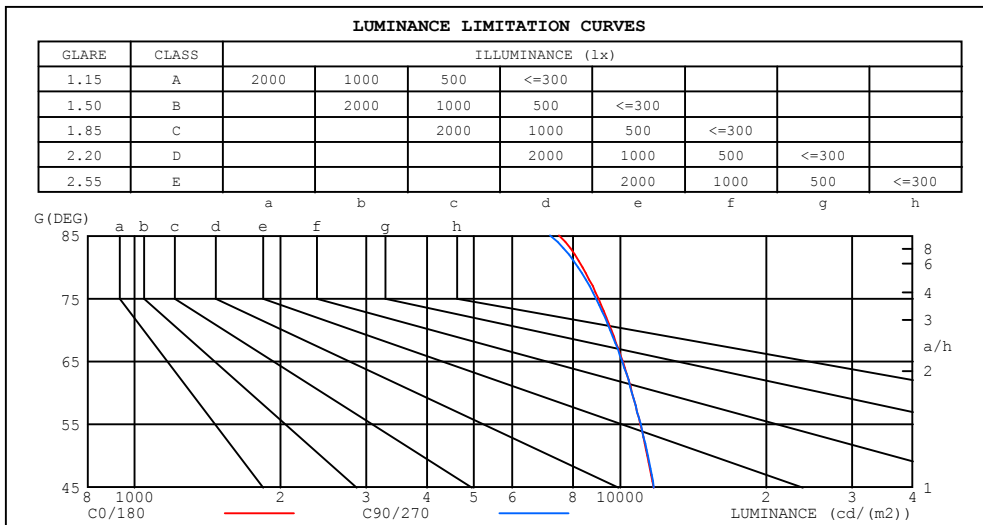

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	7479	7157
80	8359	8180
75	9023	8913
70	9595	9530
65	10117	10096
60	10581	10582
55	11000	11016
50	11378	11399
45	11717	11737


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-02-18

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:12.800m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:231.05V I:0.0347A P:7.2336W PF:0.9023 Freq:50.00Hz Lamp Flux:925.361x1 lm		
NAME: 0017440214	TYPE:	WEIGHT:
SPEC.:7.5W 3000K 850lm	DIM.:	SERIAL No.:
MFR.: LIT by CARDI	SUR.:0.025717385	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

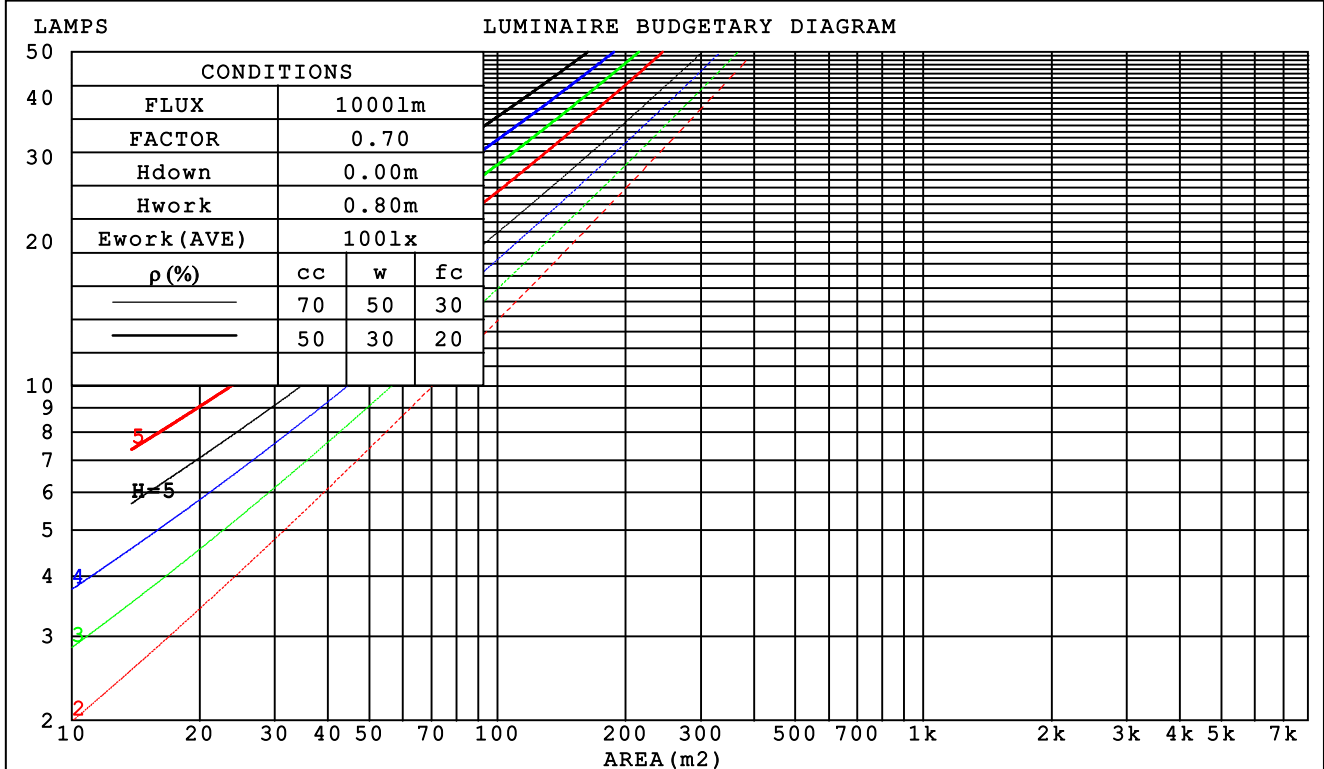

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-02-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:12.800m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:231.05V I:0.0347A P:7.2336W PF:0.9023 Freq:50.00Hz Lamp Flux:925.361x1 lm					
NAME: 0017440214			TYPE:		WEIGHT:
SPEC.:7.5W 3000K 850lm			DIM.:		SERIAL No.:
MFR.: LIT by CARDI			SUR.:0.025717385		Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0	
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
ρ_{fc}	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)										
0.0																	
1.0	.306	.174	.055	.299	.171	.054	.285	.164	.052	.273	.157	.051	.261	.151	.049		
2.0	.288	.158	.048	.282	.155	.048	.270	.150	.047	.259	.145	.045	.248	.140	.044		
3.0	.267	.142	.043	.261	.140	.042	.250	.136	.041	.241	.132	.040	.231	.128	.040		
4.0	.246	.128	.038	.241	.126	.037	.232	.123	.037	.223	.120	.036	.215	.117	.036		
5.0	.228	.116	.034	.224	.115	.033	.215	.112	.033	.207	.109	.033	.200	.107	.032		
6.0	.212	.106	.030	.208	.105	.030	.200	.103	.030	.193	.100	.029	.186	.098	.029		
7.0	.197	.097	.028	.193	.096	.027	.187	.094	.027	.180	.093	.027	.175	.091	.027		
8.0	.184	.090	.025	.181	.089	.025	.175	.087	.025	.169	.086	.025	.164	.084	.025		
9.0	.173	.084	.023	.170	.083	.023	.164	.081	.023	.159	.080	.023	.154	.078	.023		
10.0	.162	.078	.022	.160	.077	.022	.155	.076	.021	.150	.075	.021	.146	.073	.021		

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.196	.196	.196	.168	.168	.168	.115	.115	.115	.066	.066	.066	.021	.021	.021	
1.0	.186	.162	.140	.159	.139	.121	.109	.096	.084	.063	.055	.049	.020	.018	.016	
2.0	.178	.138	.104	.152	.119	.090	.104	.082	.063	.060	.048	.037	.019	.015	.012	
3.0	.170	.120	.081	.146	.104	.070	.100	.072	.049	.058	.042	.029	.019	.014	.009	
4.0	.162	.107	.065	.139	.092	.056	.096	.064	.040	.055	.038	.023	.018	.012	.008	
5.0	.155	.096	.053	.133	.083	.047	.092	.058	.033	.053	.034	.019	.017	.011	.006	
6.0	.148	.088	.045	.127	.076	.040	.087	.053	.028	.051	.031	.017	.016	.010	.005	
7.0	.141	.081	.039	.121	.070	.034	.084	.049	.024	.049	.029	.015	.016	.010	.005	
8.0	.134	.075	.035	.116	.065	.030	.080	.046	.022	.047	.027	.013	.015	.009	.004	
9.0	.128	.070	.031	.111	.061	.027	.077	.043	.019	.045	.025	.012	.014	.008	.004	
10.0	.123	.066	.029	.106	.057	.025	.073	.040	.018	.043	.024	.011	.014	.008	.004	

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-02-18

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:12.800m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:231.05V I:0.0347A P:7.2336W PF:0.9023 Freq:50.00Hz Lamp Flux:925.361x1 lm										
NAME: 0017440214					TYPE:			WEIGHT:		
SPEC.:7.5W 3000K 850lm					DIM.:			SERIAL No.:		
MFR.: LIT by CARDI					SUR.:0.025717385			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	21.1	22.6	21.4	22.8	23.1	21.1	22.6	21.4	22.8	23.0
3H	22.6	24.0	22.9	24.2	24.5	22.6	23.9	22.9	24.2	24.4
4H	23.2	24.5	23.5	24.8	25.1	23.1	24.5	23.5	24.7	25.0
6H	23.7	24.9	24.0	25.2	25.5	23.6	24.8	23.9	25.1	25.4
8H	23.8	25.0	24.2	25.3	25.6	23.7	24.9	24.1	25.2	25.5
12H	23.9	25.1	24.3	25.4	25.7	23.8	25.0	24.2	25.3	25.6
4H 2H	21.7	23.0	22.0	23.3	23.6	21.7	23.0	22.0	23.3	23.5
3H	23.4	24.5	23.7	24.8	25.1	23.3	24.5	23.7	24.8	25.1
4H	24.1	25.2	24.5	25.5	25.8	24.0	25.1	24.4	25.4	25.8
6H	24.7	25.6	25.1	26.0	26.4	24.6	25.5	25.0	25.9	26.3
8H	24.9	25.8	25.3	26.2	26.6	24.8	25.7	25.2	26.1	26.5
12H	25.1	25.9	25.5	26.3	26.7	25.0	25.8	25.4	26.2	26.6
8H 4H	24.4	25.2	24.8	25.6	26.0	24.3	25.2	24.7	25.6	26.0
6H	25.1	25.8	25.6	26.3	26.7	25.0	25.8	25.5	26.2	26.6
8H	25.4	26.1	25.9	26.5	27.0	25.3	26.0	25.8	26.4	26.9
12H	25.7	26.2	26.2	26.7	27.2	25.5	26.1	26.0	26.6	27.1
12H 4H	24.4	25.2	24.8	25.6	26.0	24.3	25.1	24.8	25.5	25.9
6H	25.2	25.8	25.7	26.3	26.7	25.1	25.7	25.6	26.2	26.6
8H	25.5	26.1	26.0	26.5	27.0	25.4	26.0	25.9	26.4	26.9
Variations with the observer position at spacings:										
S = 1.0H	+ 0.2 / - 0.2					+ 0.2 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.2				

CIE Pub.117, 925.4 lm Total Lamp Luminous Flux Corrected ($8\log(F/F_0) = -0.3$)
Area: 0.0257174 m²

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-02-18

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:12.800m [K=1.0000]
Remarks:


```

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:12.800m [K=1.0000]
Remarks:

```

ISOCANDELA DIAGRAM

Test:U:231.05V I:0.0347A P:7.2336W PF:0.9023 Freq:50.00Hz Lamp Flux:925.361x1 lm		
NAME: 0017440214	TYPE:	WEIGHT:
SPEC.:7.5W 3000K 850lm	DIM.:	SERIAL No.:
MFR.: LIT by CARDI	SUR.:0.025717385	Shielding Angle:

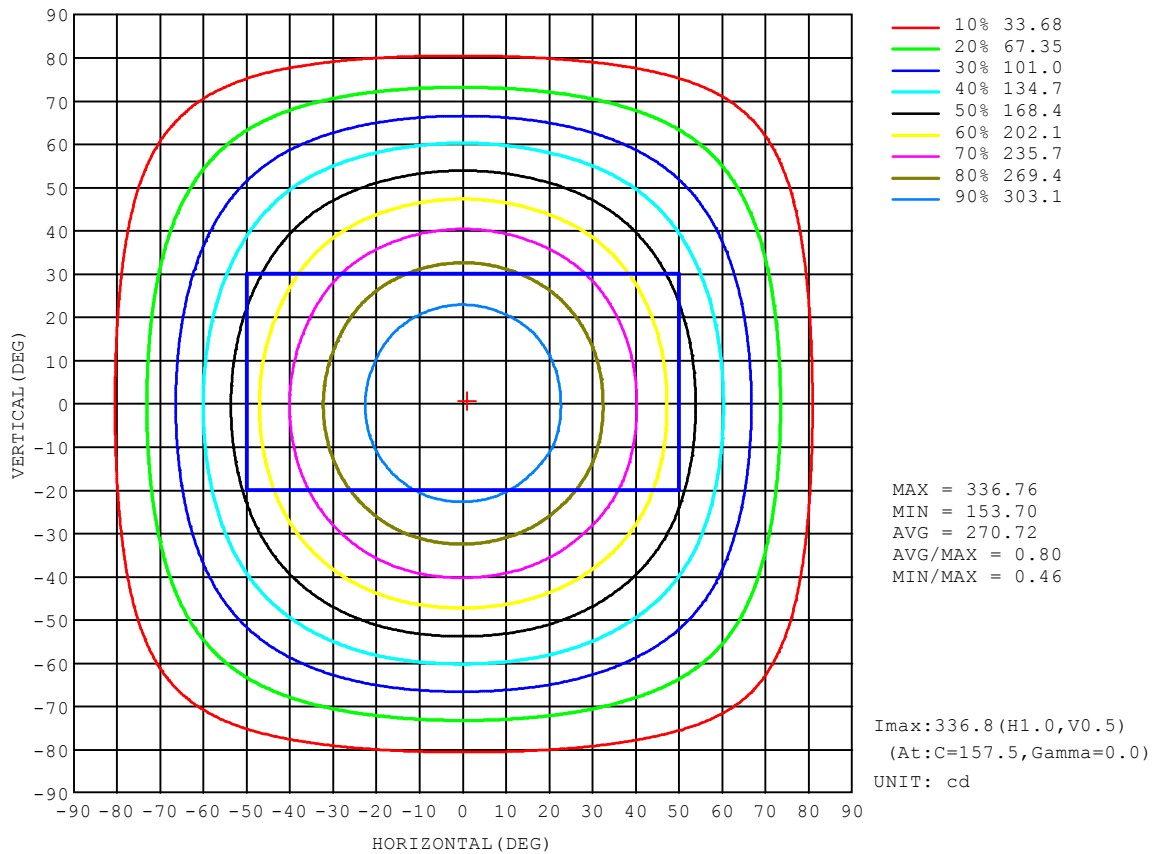


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-02-18

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:12.800m [K=1.0000]
Remarks:

AAI Figure

Test:U:231.05V I:0.0347A P:7.2336W PF:0.9023 Freq:50.00Hz Lamp Flux:925.361x1 lm		
NAME: 0017440214	TYPE:	WEIGHT:
SPEC.:7.5W 3000K 850lm	DIM.:	SERIAL No.:
MFR.: LIT by CARDI	SUR.:0.025717385	Shielding Angle:

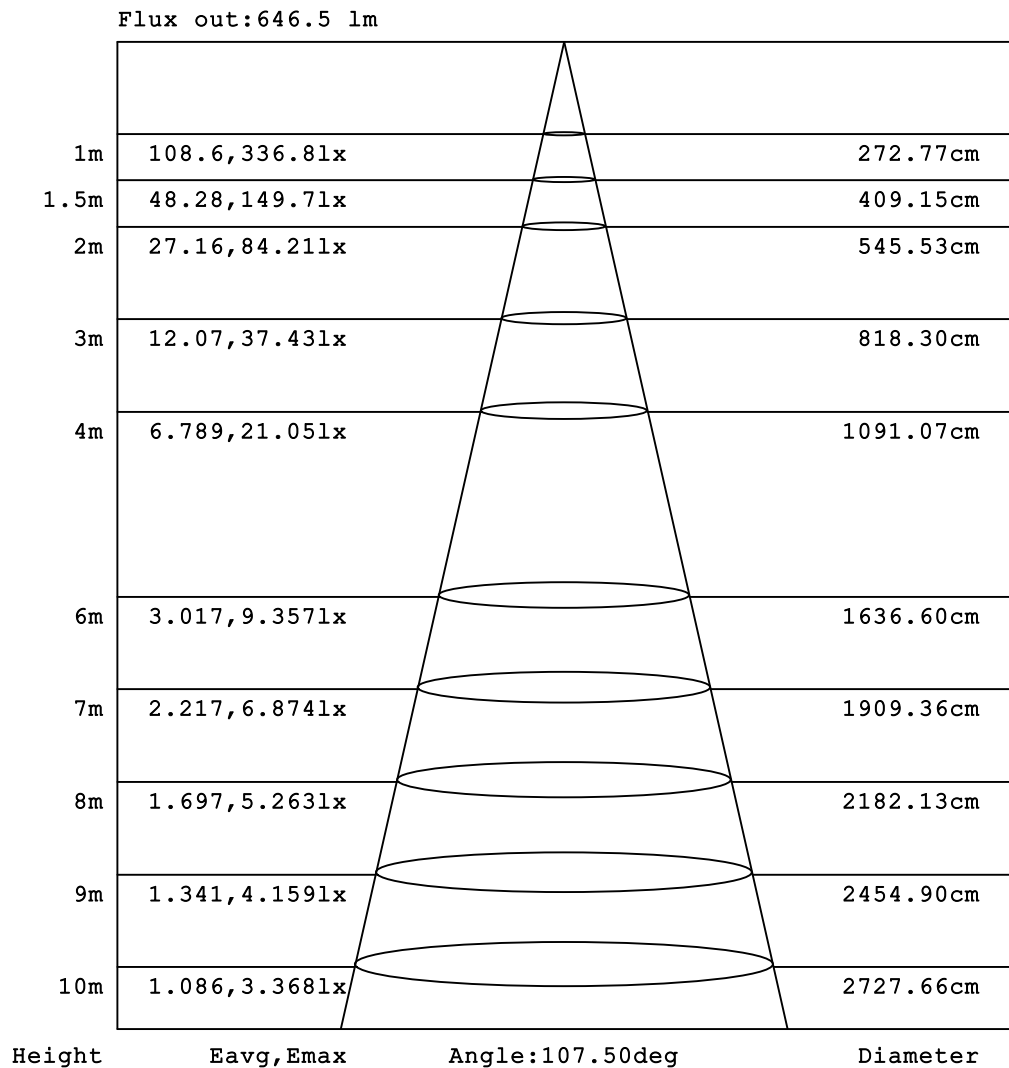


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-02-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:12.800m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:231.05V I:0.0347A P:7.2336W PF:0.9023 Freq:50.00Hz Lamp Flux:925.361x1 lm		
NAME: 0017440214	TYPE:	WEIGHT:
SPEC.:7.5W 3000K 850lm	DIM.:	SERIAL No.:
MFR.: LIT by CARDI	SUR.:0.025717385	Shielding Angle:

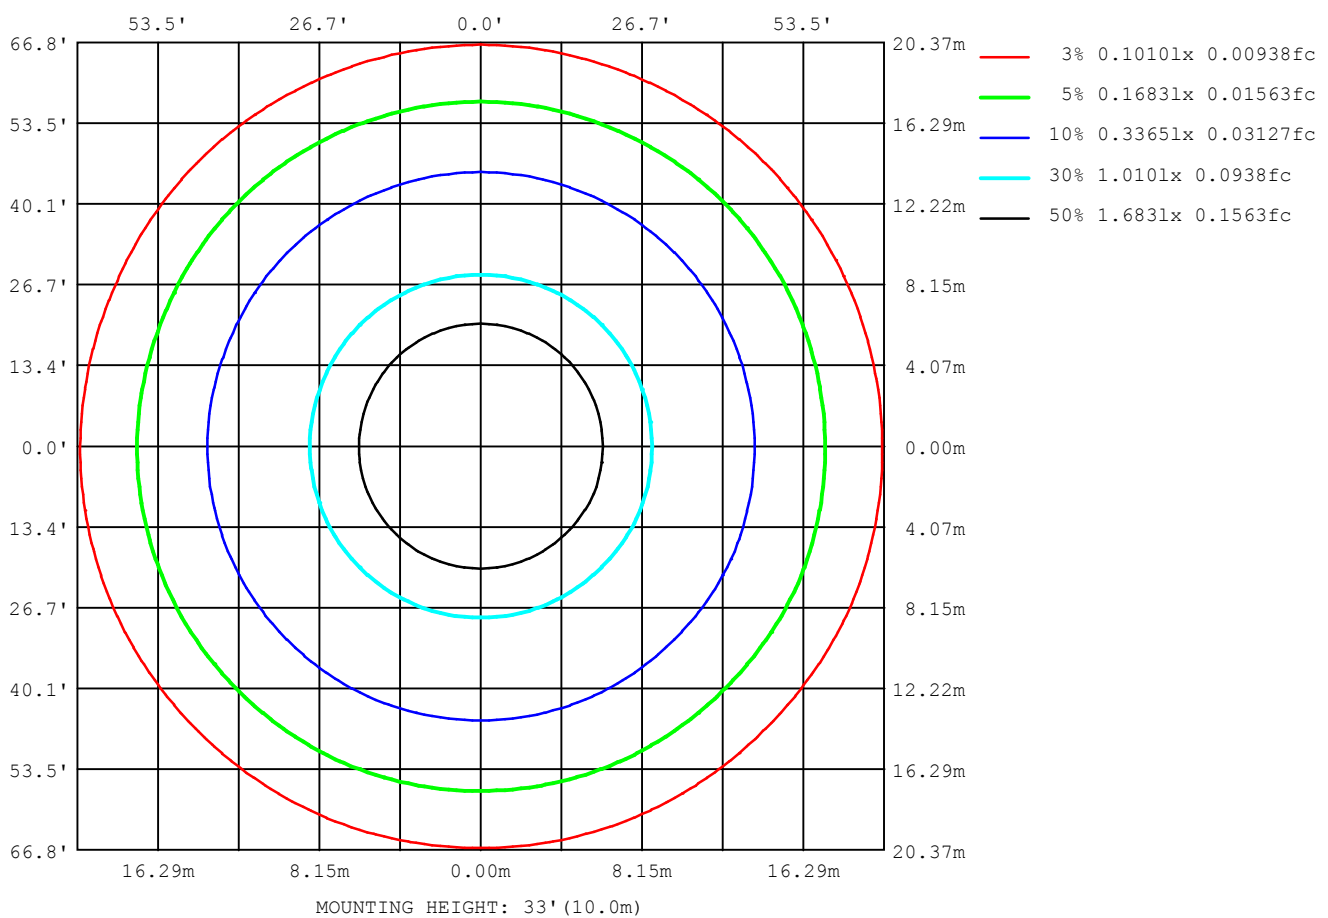

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-02-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:12.800m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:231.05V I:0.0347A P:7.2336W PF:0.9023 Freq:50.00Hz Lamp Flux:925.361x1 lm		
NAME: 0017440214	TYPE:	WEIGHT:
SPEC.:7.5W 3000K 850lm	DIM.:	SERIAL No.:
MFR.: LIT by CARDI	SUR.:0.025717385	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	10063
L_0~180 (75) av	8884
L_0~180 (85) av	7102
L_90~270 (65) av	10078
L_90~270 (75) av	8815
L_90~270 (85) av	6883
L_45 (65) av	10060
L_45 (75) av	8847
L_45 (85) av	6978

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-02-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:12.800m [K=1.0000]
Remarks:

Planar Illuminance Curve

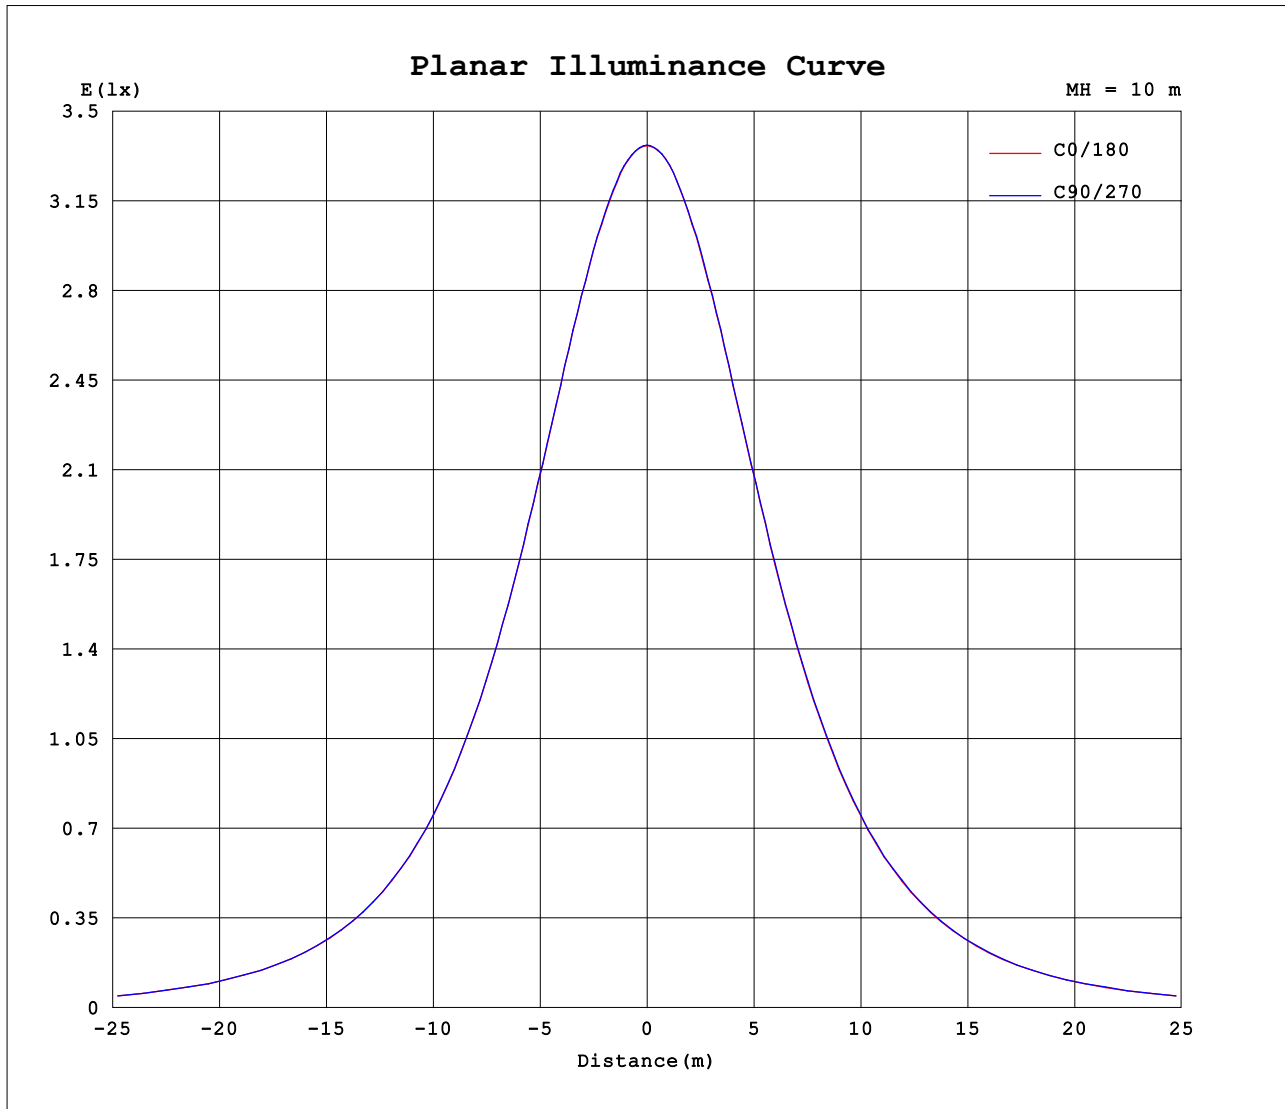

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2025-02-18

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.421
 Humidity: 65.0%
 Test Distance: 12.800m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:231.05V I:0.0347A P:7.2336W PF:0.9023 Freq:50.00Hz Lamp Flux:925.361x1 lm		
NAME: 0017440214	TYPE:	WEIGHT:
SPEC.:7.5W 3000K 850lm	DIM.:	SERIAL No.:
MFR.: LIT by CARDI	SUR.:0.025717385	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	337	336	336	337	337	337	337	337	337	336	336	337	337	337	337	337			
5	335	335	334	335	335	335	335	335	335	335	335	335	335	335	335	335			
10	330	330	330	330	330	331	330	330	330	329	330	330	330	330	330	330			
15	322	322	322	322	322	322	322	322	322	321	322	322	322	322	322	322			
20	310	311	310	311	311	311	311	311	310	310	310	310	311	311	311	311			
25	296	297	295	296	296	297	296	296	296	295	296	296	297	296	296	296			
30	279	280	278	279	279	280	279	279	278	277	279	279	279	279	279	279			
35	259	260	259	259	259	260	259	259	258	257	259	259	259	259	259	259			
40	237	238	236	237	237	238	237	237	236	235	237	237	237	237	237	237			
45	213	215	213	213	213	214	213	213	212	211	213	213	213	213	213	213			
50	188	190	188	188	188	189	188	188	187	186	188	188	188	188	188	188			
55	162	164	162	162	162	163	162	162	161	160	162	162	162	162	162	162			
60	136	138	135	136	136	137	136	136	135	134	135	135	136	135	136	135			
65	110	111	109	110	110	110	109	110	109	107	109	109	109	109	109	109			
70	84.4	85.1	83.8	83.6	83.8	83.8	83.7	83.2	82.5	81.9	82.9	83.0	82.6	82.7	82.8	83.5			
75	60.1	60.8	59.5	59.3	59.3	59.2	59.1	58.8	58.2	57.6	58.6	58.5	58.0	58.0	58.3	59.1			
80	37.3	38.2	36.9	36.7	36.5	36.4	36.3	36.1	35.6	35.0	35.9	35.7	35.2	35.2	35.6	36.4			
85	16.8	17.4	16.2	16.0	16.0	15.9	15.7	15.6	15.1	14.5	15.4	15.2	14.8	14.8	15.3	15.9			
90	0.53	0.54	0.52	0.50	0.51	0.51	0.52	0.50	0.16	0.16	0.15	0.16	0.15	0.16	0.15	0.17			
95	0.61	0.61	0.62	0.62	0.62	0.62	0.62	0.62	0.20	0.20	0.19	0.20	0.20	0.20	0.20	0.20			
100	0.75	0.75	0.76	0.77	0.76	0.76	0.76	0.76	0.27	0.27	0.27	0.27	0.26	0.27	0.27	0.26			
105	0.92	0.91	0.92	0.92	0.93	0.92	0.92	0.92	0.35	0.36	0.35	0.34	0.35	0.34	0.34	0.35			
110	1.07	1.07	1.09	1.08	1.08	1.08	1.08	1.08	0.45	0.45	0.44	0.44	0.44	0.44	0.44	0.44			
115	1.24	1.23	1.25	1.25	1.25	1.24	1.24	1.24	0.57	0.56	0.55	0.54	0.54	0.54	0.54	0.55			
120	1.40	1.40	1.41	1.41	1.41	1.40	1.41	1.40	0.69	0.68	0.67	0.66	0.66	0.66	0.66	0.67			
125	1.56	1.55	1.56	1.57	1.57	1.56	1.56	1.56	0.82	0.81	0.80	0.80	0.80	0.80	0.80	0.80			
130	1.71	1.70	1.71	1.71	1.72	1.71	1.71	1.71	0.97	0.96	0.94	0.94	0.94	0.94	0.94	0.95			
135	1.84	1.84	1.85	1.85	1.85	1.84	1.84	1.85	1.13	1.11	1.10	1.09	1.09	1.10	1.10	1.10			
140	1.96	1.96	1.97	1.97	1.96	1.96	1.96	1.97	1.27	1.27	1.25	1.25	1.26	1.25	1.26	1.26			
145	2.07	2.06	2.07	2.07	2.07	2.06	2.06	2.07	1.43	1.43	1.41	1.40	1.41	1.41	1.41	1.42			
150	2.16	2.17	2.17	2.16	2.16	2.16	2.16	2.17	1.60	1.60	1.58	1.57	1.57	1.57	1.58	1.58			
155	2.24	2.25	2.24	2.24	2.23	2.23	2.24	2.24	1.79	1.78	1.76	1.74	1.74	1.75	1.76	1.77			
160	2.31	2.31	2.30	2.30	2.30	2.29	2.30	2.30	1.95	1.93	1.91	1.91	1.90	1.91	1.92	1.93			
165	2.36	2.36	2.36	2.35	2.35	2.34	2.35	2.36	2.08	2.06	2.05	2.04	2.04	2.04	2.05	2.06			
170	2.39	2.38	2.39	2.38	2.37	2.38	2.38	2.39	2.19	2.18	2.16	2.16	2.16	2.16	2.17	2.17			
175	2.40	2.39	2.39	2.38	2.39	2.39	2.39	2.40	2.29	2.30	2.27	2.27	2.27	2.28	2.28	2.29			
180	2.37	2.37	2.36	2.36	2.35	2.36	2.36	2.37	2.38	2.37	2.36	2.36	2.36	2.36	2.36	2.37			

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-02-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:12.800m [K=1.0000]
Remarks: