


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:231.08V I:0.0347A P:7.2309W PF:0.9025 Freq:50.00Hz Lamp Flux:935.481x1 lm		
NAME: 0017440214	TYPE:	WEIGHT:
SPEC.:7.5W 4000K 850lm	DIM.:	SERIAL No.:
MFR.: LIT by CARDI	SUR.:0.025717385	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 129.37 lm/W			
MODEL	4000K	I _{max} (cd)	340.6	S/MH (C0/180)	1.23
NOMINAL POWER(W)	7.5	LOR (%)	100.0	S/MH (C90/270)	1.24
RATED VOLTAGE(V)	230	TOTAL FLUX (lm)	935.48	η UP, DN (C0-180)	0.5, 49.9
NOMINAL FLUX (lm)	935.481	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.3, 49.4
LAMPS INSIDE	1	η up (%)	0.8	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	230	η down (%)	99.2	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

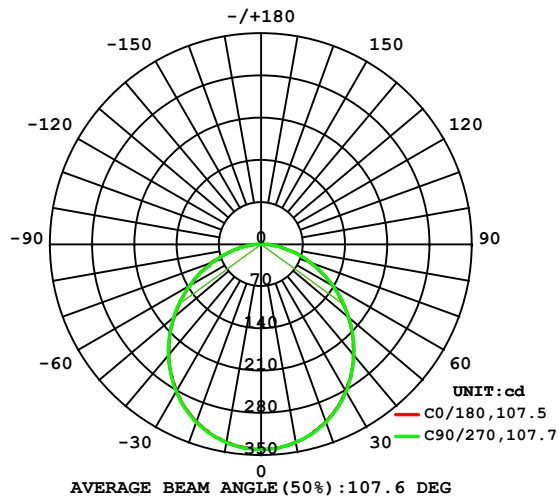

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

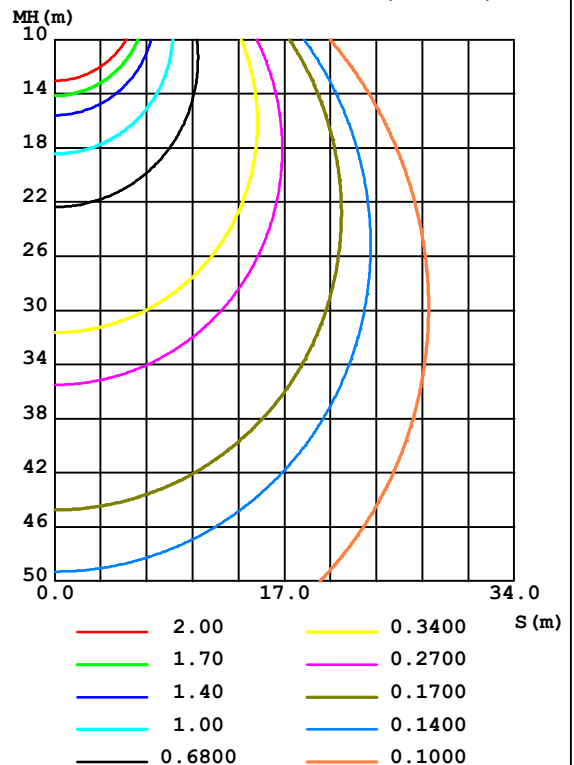

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2025-02-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity: 65.0%
Test Distance: 12.800m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	333.5	333.3	333.9	333.8	333.5	333.6	333.9	333.8	0- 10	32.16	32.16	3.44,3.44
20	313.7	313.7	314.1	313.9	313.7	313.8	314.2	314.1	10- 20	91.79	123.9	13.2,13.2
30	281.6	281.6	282.3	282.0	281.2	281.8	282.0	282.0	20- 30	137.9	261.8	28,28
40	239.1	239.1	240.0	239.6	238.9	239.3	239.6	239.4	30- 40	163.6	425.4	45.5,45.5
50	189.9	189.7	190.6	190.3	189.3	189.8	190.0	190.0	40- 50	166.0	591.5	63.2,63.2
60	137.3	137.1	137.7	137.5	136.8	136.9	136.9	137.0	50- 60	146.4	737.9	78.9,78.9
70	85.10	85.05	85.18	84.77	83.60	83.70	83.29	83.59	60- 70	109.4	847.3	90.6,90.6
80	37.63	37.49	37.25	36.80	36.16	36.15	35.41	35.95	70- 80	63.15	910.5	97.3,97.3
90	0.5144	0.5305	0.5210	0.5160	0.1588	0.1537	0.1521	0.1554	80- 90	17.92	928.4	99.2,99.2
100	0.7566	0.7648	0.7617	0.7635	0.2790	0.2721	0.2687	0.2670	90-100	0.4512	928.8	99.3,99.3
110	1.091	1.088	1.086	1.083	0.4629	0.4495	0.4479	0.4462	100-110	0.6752	929.5	99.4,99.4
120	1.405	1.408	1.407	1.409	0.6996	0.6774	0.6778	0.6728	110-120	0.8950	930.4	99.5,99.5
130	1.711	1.711	1.716	1.709	0.9854	0.9629	0.9632	0.9562	120-130	1.066	931.5	99.6,99.6
140	1.968	1.968	1.966	1.966	1.289	1.267	1.266	1.277	130-140	1.145	932.6	99.7,99.7
150	2.182	2.182	2.177	2.177	1.619	1.593	1.587	1.602	140-150	1.099	933.7	99.8,99.8
160	2.314	2.306	2.299	2.299	1.970	1.935	1.921	1.943	150-160	0.9293	934.6	99.9,99.9
170	2.410	2.397	2.382	2.390	2.213	2.189	2.179	2.189	160-170	0.6253	935.3	100,100
180	2.380	2.365	2.365	2.367	2.387	2.368	2.365	2.370	170-180	0.2225	935.5	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-02-18

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:12.800m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:231.08V I:0.0347A P:7.2309W PF:0.9025 Freq:50.00Hz Lamp Flux:935.481x1 lm		
NAME: 0017440214	TYPE:	WEIGHT:
SPEC.:7.5W 4000K 850lm	DIM.:	SERIAL No.:
MFR.: LIT by CARDI	SUR.:0.025717385	Shielding Angle:

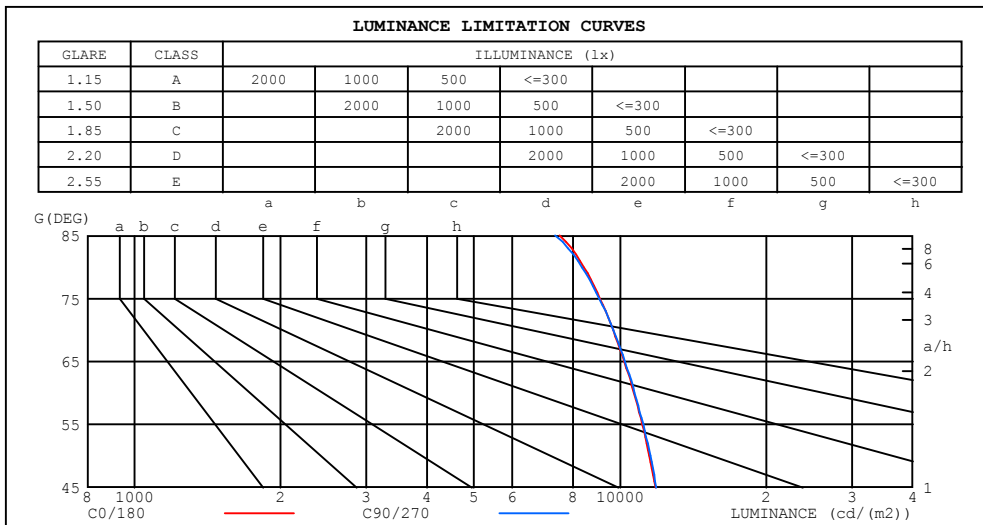


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-02-18

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:12.800m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:231.08V I:0.0347A P:7.2309W PF:0.9025 Freq:50.00Hz Lamp Flux:935.481x1 lm		
NAME: 0017440214	TYPE:	WEIGHT:
SPEC.:7.5W 4000K 850lm	DIM.:	SERIAL No.:
MFR.: LIT by CARDI	SUR.:0.025717385	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

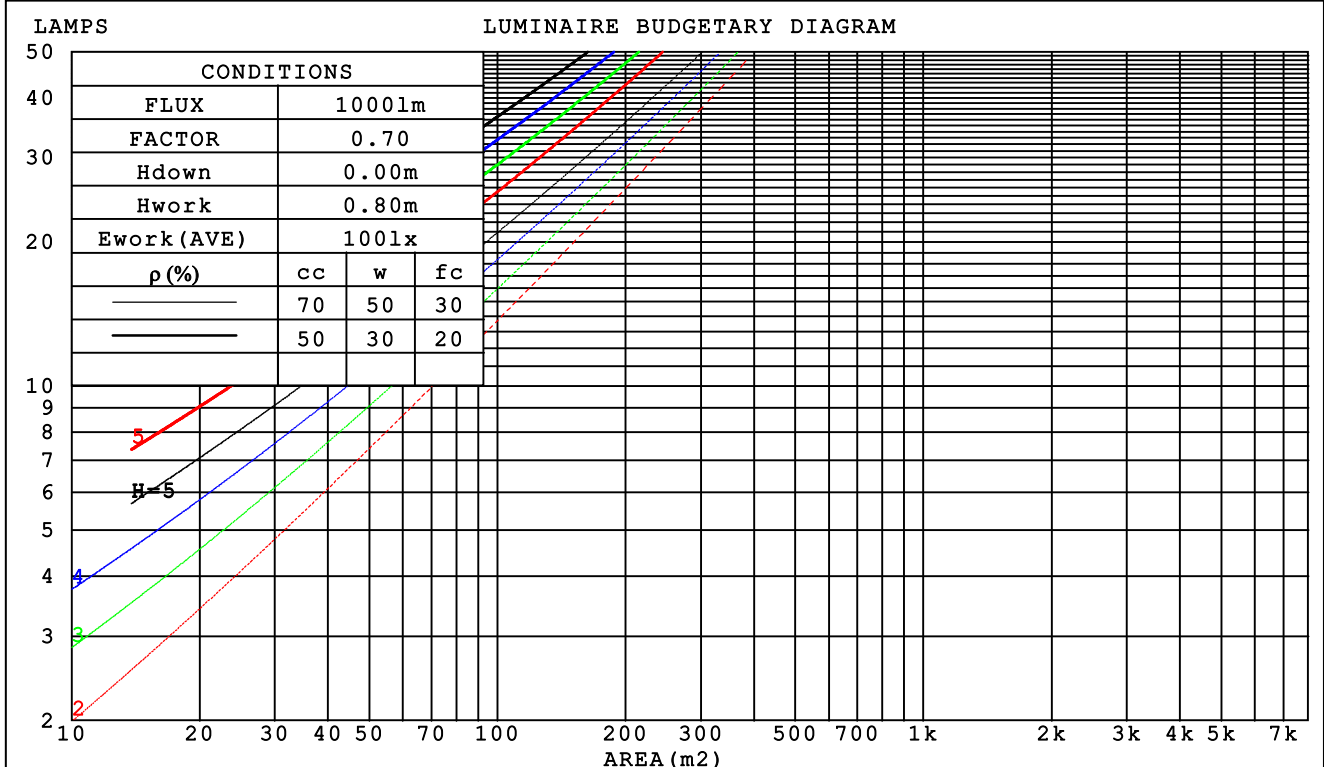

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-02-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:12.800m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:231.08V I:0.0347A P:7.2309W PF:0.9025 Freq:50.00Hz Lamp Flux:935.481x1 lm					
NAME: 0017440214			TYPE:		WEIGHT:
SPEC.:7.5W 4000K 850lm			DIM.:		SERIAL No.:
MFR.: LIT by CARDI			SUR.:0.025717385		Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0	
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
ρ_{fc}	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)										
0.0																	
1.0	.307	.174	.055	.299	.171	.054	.286	.164	.052	.273	.157	.051	.261	.152	.049		
2.0	.288	.158	.048	.282	.155	.048	.270	.150	.047	.259	.145	.045	.248	.140	.044		
3.0	.267	.142	.043	.261	.140	.042	.251	.136	.041	.241	.132	.040	.231	.128	.040		
4.0	.246	.128	.038	.241	.126	.037	.232	.123	.037	.223	.120	.036	.215	.117	.036		
5.0	.228	.116	.034	.224	.115	.033	.215	.112	.033	.207	.109	.033	.200	.107	.032		
6.0	.212	.106	.030	.208	.105	.030	.200	.103	.030	.193	.100	.029	.186	.098	.029		
7.0	.197	.097	.028	.193	.096	.027	.187	.094	.027	.180	.093	.027	.175	.091	.027		
8.0	.184	.090	.025	.181	.089	.025	.175	.087	.025	.169	.086	.025	.164	.084	.025		
9.0	.173	.084	.023	.170	.083	.023	.164	.081	.023	.159	.080	.023	.154	.078	.023		
10.0	.162	.078	.022	.160	.077	.022	.155	.076	.021	.150	.075	.021	.146	.073	.021		

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.196	.196	.196	.168	.168	.168	.114	.114	.114	.066	.066	.066	.021	.021	.021	
1.0	.186	.162	.140	.159	.139	.121	.109	.096	.084	.063	.055	.049	.020	.018	.016	
2.0	.178	.138	.104	.152	.119	.090	.104	.082	.063	.060	.048	.037	.019	.015	.012	
3.0	.170	.120	.081	.146	.104	.070	.100	.072	.049	.058	.042	.029	.019	.014	.009	
4.0	.162	.107	.065	.139	.092	.056	.096	.064	.040	.055	.038	.023	.018	.012	.008	
5.0	.155	.096	.053	.133	.083	.047	.091	.058	.033	.053	.034	.019	.017	.011	.006	
6.0	.148	.088	.045	.127	.076	.040	.087	.053	.028	.051	.031	.017	.016	.010	.005	
7.0	.141	.081	.039	.121	.070	.034	.084	.049	.024	.049	.029	.014	.016	.010	.005	
8.0	.134	.075	.035	.116	.065	.030	.080	.046	.022	.047	.027	.013	.015	.009	.004	
9.0	.128	.070	.031	.111	.061	.027	.077	.043	.019	.045	.025	.012	.014	.008	.004	
10.0	.123	.066	.029	.106	.057	.025	.073	.040	.018	.043	.024	.011	.014	.008	.004	

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-02-18

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:12.800m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:231.08V I:0.0347A P:7.2309W PF:0.9025 Freq:50.00Hz Lamp Flux:935.481x1 lm										
NAME: 0017440214					TYPE:			WEIGHT:		
SPEC.:7.5W 4000K 850lm					DIM.:			SERIAL No.:		
MFR.: LIT by CARDI					SUR.:0.025717385			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	21.1	22.6	21.4	22.8	23.1	21.1	22.6	21.4	22.9	23.1
3H	22.6	24.0	22.9	24.2	24.5	22.6	24.0	22.9	24.2	24.5
4H	23.2	24.5	23.5	24.8	25.1	23.2	24.5	23.5	24.8	25.1
6H	23.7	24.9	24.0	25.2	25.5	23.6	24.9	24.0	25.2	25.5
8H	23.8	25.0	24.2	25.3	25.6	23.8	25.0	24.1	25.3	25.6
12H	23.9	25.1	24.3	25.4	25.7	23.9	25.0	24.2	25.3	25.7
4H 2H	21.7	23.0	22.0	23.3	23.6	21.7	23.0	22.1	23.3	23.6
3H	23.4	24.5	23.7	24.8	25.2	23.4	24.5	23.7	24.8	25.2
4H	24.1	25.2	24.5	25.5	25.8	24.1	25.2	24.5	25.5	25.8
6H	24.7	25.6	25.1	26.0	26.4	24.7	25.6	25.1	26.0	26.4
8H	24.9	25.8	25.3	26.2	26.6	24.9	25.8	25.3	26.1	26.5
12H	25.1	25.9	25.5	26.3	26.7	25.0	25.8	25.5	26.2	26.6
8H 4H	24.4	25.2	24.8	25.6	26.0	24.4	25.2	24.8	25.6	26.0
6H	25.1	25.8	25.6	26.3	26.7	25.1	25.8	25.6	26.2	26.7
8H	25.4	26.1	25.9	26.5	27.0	25.4	26.0	25.9	26.5	26.9
12H	25.7	26.2	26.2	26.7	27.2	25.6	26.2	26.1	26.6	27.1
12H 4H	24.4	25.2	24.8	25.6	26.0	24.4	25.2	24.8	25.6	26.0
6H	25.2	25.8	25.7	26.3	26.7	25.2	25.8	25.6	26.2	26.7
8H	25.5	26.1	26.0	26.5	27.0	25.5	26.1	26.0	26.5	27.0
Variations with the observer position at spacings:										
S = 1.0H	+ 0.2 / - 0.2					+ 0.2 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.2					+ 0.2 / - 0.2				

CIE Pub.117, 935.5 lm Total Lamp Luminous Flux Corrected ($8\log(F/F_0) = -0.2$)
Area: 0.0257174 m²

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-02-18

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:12.800m [K=1.0000]
Remarks:


```

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:12.800m [K=1.0000]
Remarks:

```

ISOCANDELA DIAGRAM

Test:U:231.08V I:0.0347A P:7.2309W PF:0.9025 Freq:50.00Hz Lamp Flux:935.481x1 lm		
NAME: 0017440214	TYPE:	WEIGHT:
SPEC.:7.5W 4000K 850lm	DIM.:	SERIAL No.:
MFR.: LIT by CARDI	SUR.:0.025717385	Shielding Angle:

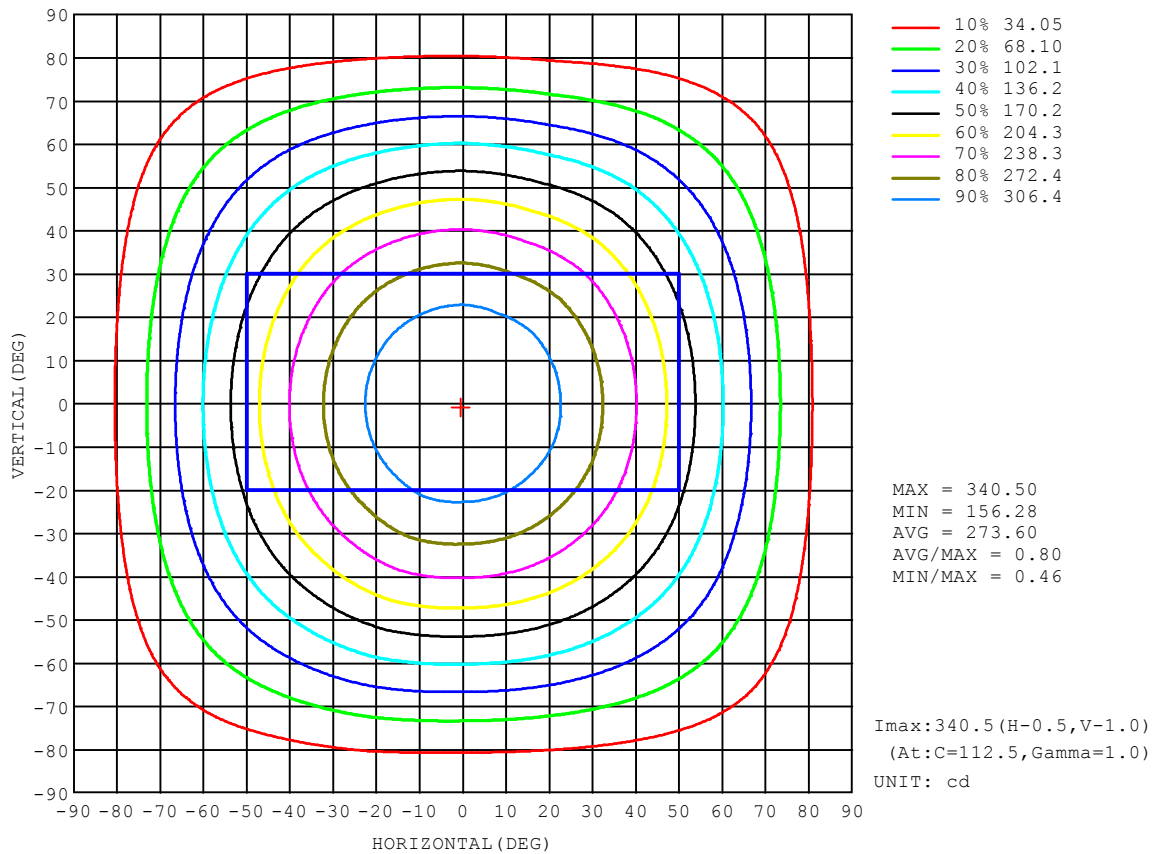


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-02-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:12.800m [K=1.0000]
Remarks:

AAI Figure

Test:U:231.08V I:0.0347A P:7.2309W PF:0.9025 Freq:50.00Hz Lamp Flux:935.481x1 lm		
NAME: 0017440214	TYPE:	WEIGHT:
SPEC.:7.5W 4000K 850lm	DIM.:	SERIAL No.:
MFR.: LIT by CARDI	SUR.:0.025717385	Shielding Angle:

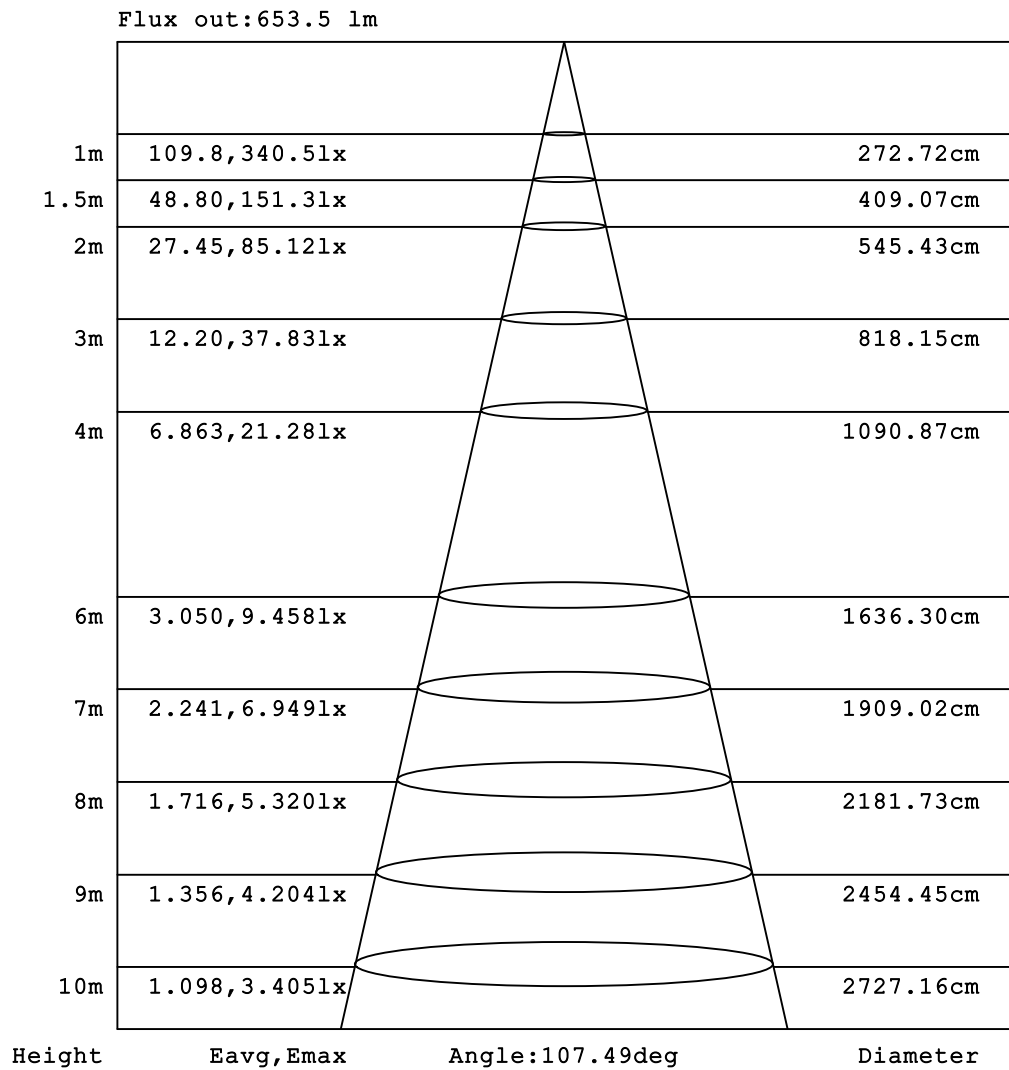


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-02-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:12.800m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:231.08V I:0.0347A P:7.2309W PF:0.9025 Freq:50.00Hz Lamp Flux:935.481x1 lm		
NAME: 0017440214	TYPE:	WEIGHT:
SPEC.:7.5W 4000K 850lm	DIM.:	SERIAL No.:
MFR.: LIT by CARDI	SUR.:0.025717385	Shielding Angle:

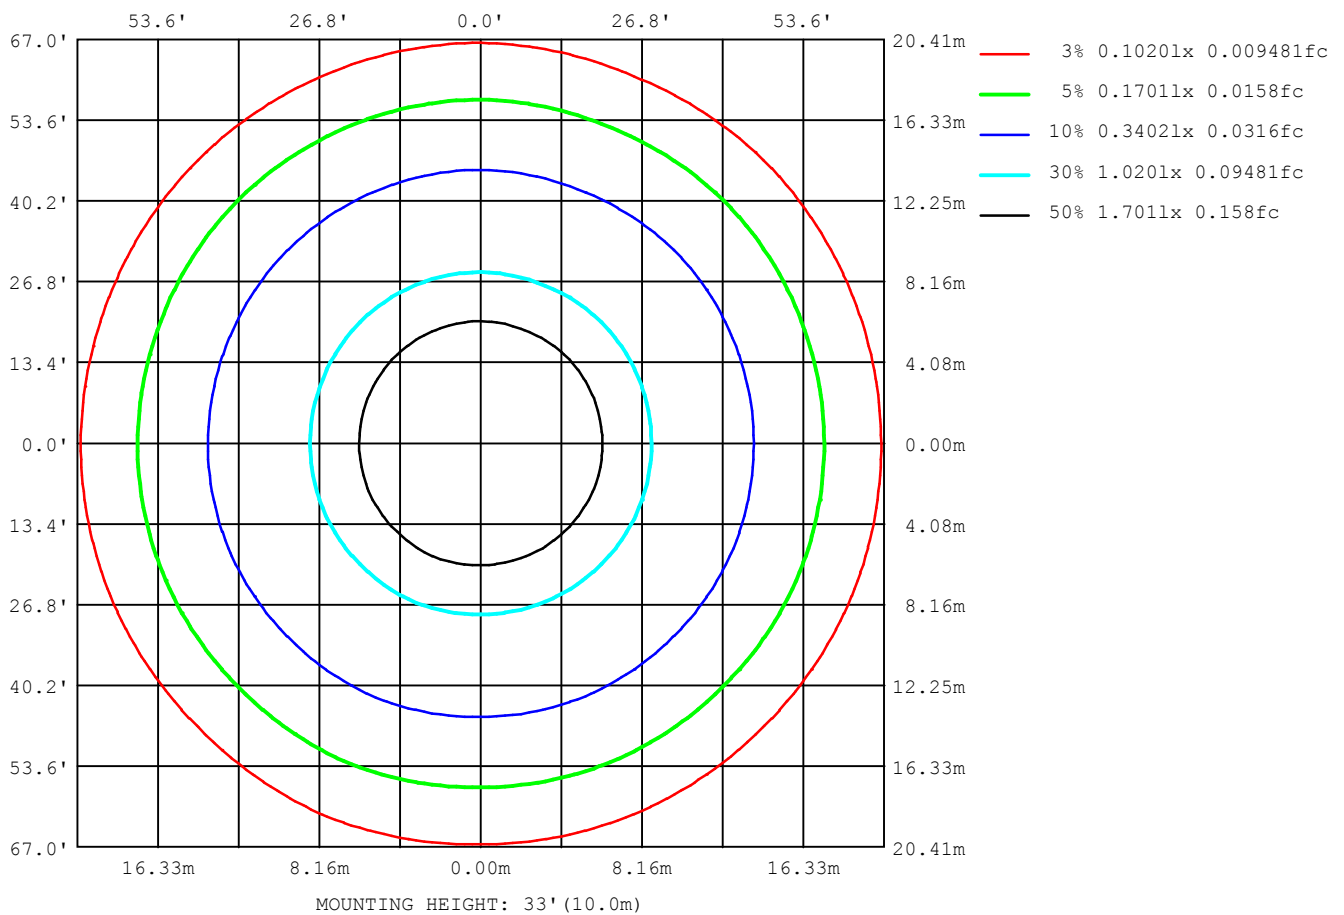

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-02-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:12.800m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:231.08V I:0.0347A P:7.2309W PF:0.9025 Freq:50.00Hz Lamp Flux:935.481x1 lm		
NAME: 0017440214	TYPE:	WEIGHT:
SPEC.:7.5W 4000K 850lm	DIM.:	SERIAL No.:
MFR.: LIT by CARDI	SUR.:0.025717385	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	10173
L_0~180 (75) av	8979
L_0~180 (85) av	7177
L_90~270 (65) av	10187
L_90~270 (75) av	8926
L_90~270 (85) av	6955
L_45 (65) av	10182
L_45 (75) av	8954
L_45 (85) av	7058

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-02-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:12.800m [K=1.0000]
Remarks:

Planar Illuminance Curve

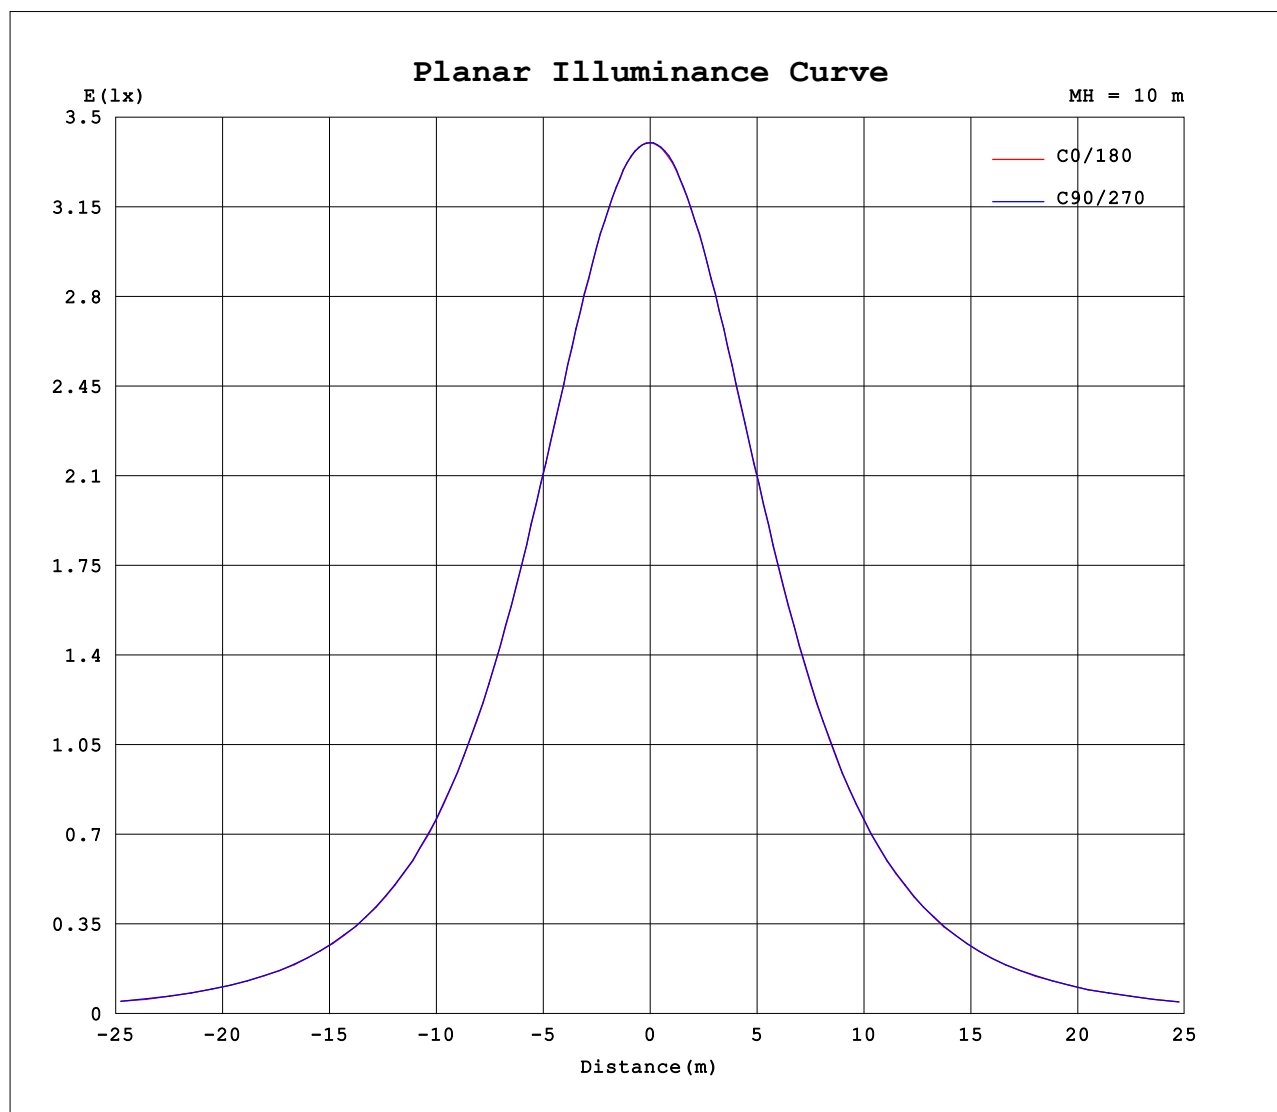

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2025-02-18

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity: 65.0%
Test Distance: 12.800m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:231.08V I:0.0347A P:7.2309W PF:0.9025 Freq:50.00Hz Lamp Flux:935.481x1 lm		
NAME: 0017440214	TYPE:	WEIGHT:
SPEC.:7.5W 4000K 850lm	DIM.:	SERIAL No.:
MFR.: LIT by CARDI	SUR.:0.025717385	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	340	340	340	340	340	340	340	340	340	340	340	340	340	340	340	340			
5	339	339	338	339	339	339	339	338	338	339	338	339	339	338	339	338			
10	334	334	333	334	334	335	334	333	333	333	334	334	334	333	334	334			
15	325	326	325	326	326	327	325	325	325	325	325	326	326	324	326	325			
20	314	314	314	314	314	316	314	314	314	313	314	314	314	313	314	314			
25	299	300	299	300	300	301	299	299	299	299	299	299	300	298	299	299			
30	282	282	282	282	282	284	282	282	281	281	282	282	282	280	282	281			
35	261	262	261	262	262	264	262	262	261	261	262	262	262	260	262	261			
40	239	240	239	240	240	242	240	240	239	238	239	239	240	237	239	239			
45	215	216	215	216	216	219	216	216	215	214	215	215	215	213	215	215			
50	190	191	190	191	191	193	190	190	189	189	190	190	190	187	190	189			
55	164	165	164	165	164	167	164	164	163	163	164	163	164	161	164	163			
60	137	138	137	138	138	141	137	137	137	136	137	136	137	134	137	137			
65	111	112	111	112	111	114	111	111	110	110	110	110	110	107	110	110			
70	85.1	85.3	85.0	84.9	85.2	87.0	84.8	84.2	83.6	83.6	83.7	83.7	83.3	81.3	83.6	84.3			
75	60.5	60.8	60.5	60.2	60.4	62.1	59.9	59.5	59.0	59.0	59.1	58.9	58.5	56.4	58.9	59.7			
80	37.6	37.9	37.5	37.3	37.3	38.8	36.8	36.5	36.2	36.1	36.2	35.9	35.4	33.6	36.0	36.8			
85	16.8	17.0	16.6	16.4	16.5	17.9	16.0	15.9	15.4	15.3	15.4	15.1	14.7	13.2	15.3	16.0			
90	0.51	0.52	0.53	0.51	0.52	0.62	0.52	0.50	0.16	0.16	0.15	0.16	0.15	0.16	0.16	0.17			
95	0.62	0.61	0.62	0.62	0.62	0.60	0.62	0.62	0.20	0.21	0.20	0.21	0.20	0.21	0.20	0.20			
100	0.76	0.76	0.76	0.76	0.76	0.75	0.76	0.76	0.28	0.28	0.27	0.27	0.27	0.28	0.27	0.27			
105	0.92	0.91	0.92	0.93	0.92	0.90	0.92	0.92	0.37	0.36	0.35	0.35	0.35	0.36	0.35	0.35			
110	1.09	1.08	1.09	1.09	1.09	1.07	1.08	1.08	0.46	0.45	0.45	0.45	0.45	0.46	0.45	0.45			
115	1.24	1.24	1.25	1.25	1.25	1.23	1.25	1.25	0.57	0.56	0.56	0.56	0.55	0.56	0.55	0.56			
120	1.41	1.40	1.41	1.41	1.41	1.39	1.41	1.41	0.70	0.68	0.68	0.68	0.68	0.69	0.67	0.68			
125	1.56	1.56	1.57	1.57	1.57	1.55	1.56	1.57	0.84	0.82	0.81	0.81	0.82	0.83	0.81	0.82			
130	1.71	1.71	1.71	1.72	1.72	1.70	1.71	1.71	0.99	0.97	0.96	0.96	0.96	0.98	0.96	0.96			
135	1.85	1.85	1.85	1.85	1.85	1.84	1.84	1.85	1.14	1.13	1.12	1.11	1.11	1.13	1.12	1.12			
140	1.97	1.97	1.97	1.97	1.97	1.96	1.97	1.97	1.29	1.29	1.27	1.26	1.27	1.28	1.28	1.27			
145	2.08	2.08	2.08	2.08	2.08	2.07	2.08	2.08	1.45	1.44	1.43	1.42	1.42	1.43	1.44	1.43			
150	2.18	2.19	2.18	2.18	2.18	2.17	2.18	2.18	1.62	1.61	1.59	1.59	1.59	1.60	1.60	1.61			
155	2.25	2.26	2.25	2.25	2.24	2.24	2.24	2.25	1.81	1.80	1.77	1.78	1.77	1.79	1.78	1.79			
160	2.31	2.32	2.31	2.30	2.30	2.30	2.30	2.31	1.97	1.95	1.93	1.93	1.92	1.94	1.94	1.95			
165	2.38	2.37	2.37	2.36	2.36	2.35	2.36	2.38	2.10	2.08	2.07	2.06	2.06	2.07	2.07	2.07			
170	2.41	2.40	2.40	2.39	2.38	2.39	2.39	2.40	2.21	2.20	2.19	2.19	2.18	2.19	2.19	2.19			
175	2.42	2.40	2.41	2.40	2.39	2.40	2.40	2.41	2.31	2.31	2.30	2.29	2.29	2.30	2.29	2.30			
180	2.38	2.37	2.36	2.37	2.36	2.37	2.37	2.37	2.39	2.38	2.37	2.37	2.36	2.37	2.37	2.37			

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-02-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:12.800m [K=1.0000]
Remarks: