


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:231.07V I:0.0346A P:7.2221W PF:0.9022 Freq:50.00Hz Lamp Flux:940.099x1 lm		
NAME: 0017440214	TYPE:	WEIGHT:
SPEC.:7.5W 5000K 850lm	DIM.:	SERIAL No.:
MFR.: LIT by CARDI	SUR.:0.025717385	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 130.17 lm/W			
MODEL	5000K	I _{max} (cd)	342.2	S/MH (C0/180)	1.24
NOMINAL POWER(W)	7.5	LOR (%)	100.0	S/MH (C90/270)	1.24
RATED VOLTAGE(V)	230	TOTAL FLUX (lm)	940.10	η UP, DN (C0-180)	0.5, 49.5
NOMINAL FLUX (lm)	940.099	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.3, 49.7
LAMPS INSIDE	1	η up (%)	0.8	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	230	η down (%)	99.2	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

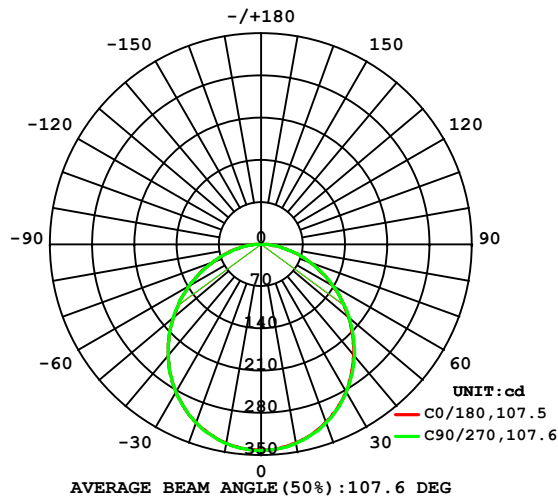

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

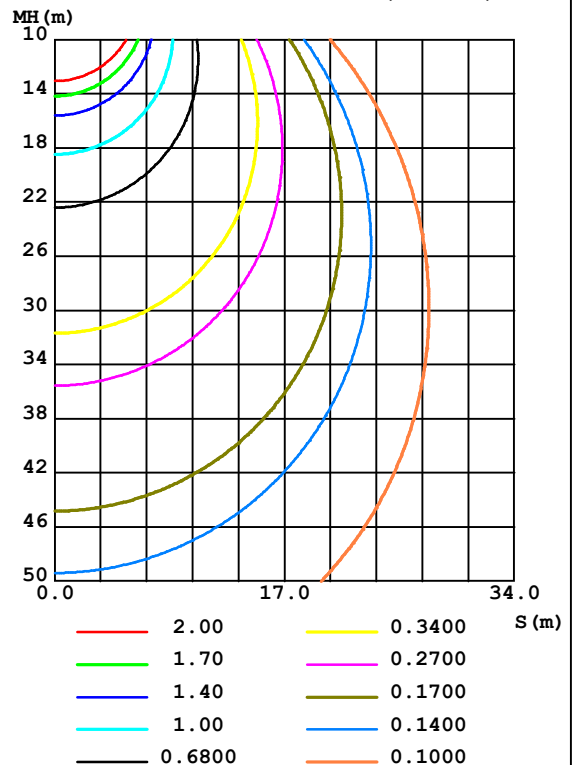

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2025-02-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity: 65.0%
Test Distance: 12.800m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	334.6	335.4	335.3	335.5	335.0	335.5	335.6	335.6	0- 10	32.33	32.33	3.44,3.44
20	314.8	315.2	315.6	315.8	315.4	315.6	315.5	315.9	10- 20	92.24	124.6	13.3,13.3
30	282.5	282.7	283.3	283.7	283.0	283.3	283.1	283.7	20- 30	138.5	263.1	28,28
40	239.6	240.3	241.0	241.1	240.5	240.5	240.5	240.9	30- 40	164.4	427.5	45.5,45.5
50	190.2	190.5	191.3	191.3	190.7	190.7	190.8	191.1	40- 50	166.8	594.3	63.2,63.2
60	137.4	137.7	138.3	138.3	137.9	137.5	137.6	137.9	50- 60	147.1	741.4	78.9,78.9
70	84.99	85.37	85.49	85.31	84.53	84.23	83.69	84.05	60- 70	110.0	851.4	90.6,90.6
80	37.40	37.59	37.37	37.01	36.82	36.42	35.64	36.16	70- 80	63.48	914.9	97.3,97.3
90	0.5205	0.5175	0.5264	0.5207	0.1622	0.1571	0.1521	0.1537	80- 90	18.01	932.9	99.2,99.2
100	0.7683	0.7719	0.7769	0.7703	0.2823	0.2721	0.2721	0.2687	90-100	0.4571	933.4	99.3,99.3
110	1.099	1.101	1.097	1.096	0.4748	0.4513	0.4478	0.4513	100-110	0.6835	934.1	99.4,99.4
120	1.423	1.424	1.422	1.422	0.7183	0.6843	0.6809	0.6793	110-120	0.9057	935.0	99.5,99.5
130	1.733	1.728	1.733	1.726	1.012	0.9667	0.9662	0.9629	120-130	1.077	936.0	99.6,99.6
140	1.995	1.993	1.988	1.986	1.321	1.282	1.279	1.279	130-140	1.154	937.2	99.7,99.7
150	2.202	2.203	2.193	2.194	1.656	1.617	1.605	1.617	140-150	1.110	938.3	99.8,99.8
160	2.361	2.348	2.333	2.341	2.024	1.963	1.951	1.958	150-160	0.9389	939.2	99.9,99.9
170	2.459	2.437	2.419	2.441	2.270	2.225	2.196	2.211	160-170	0.6351	939.9	100,100
180	2.421	2.402	2.399	2.399	2.446	2.405	2.397	2.397	170-180	0.2257	940.1	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-02-18

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:12.800m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:231.07V I:0.0346A P:7.2221W PF:0.9022 Freq:50.00Hz Lamp Flux:940.099x1 lm		
NAME: 0017440214	TYPE:	WEIGHT:
SPEC.:7.5W 5000K 850lm	DIM.:	SERIAL No.:
MFR.: LIT by CARDI	SUR.:0.025717385	Shielding Angle:

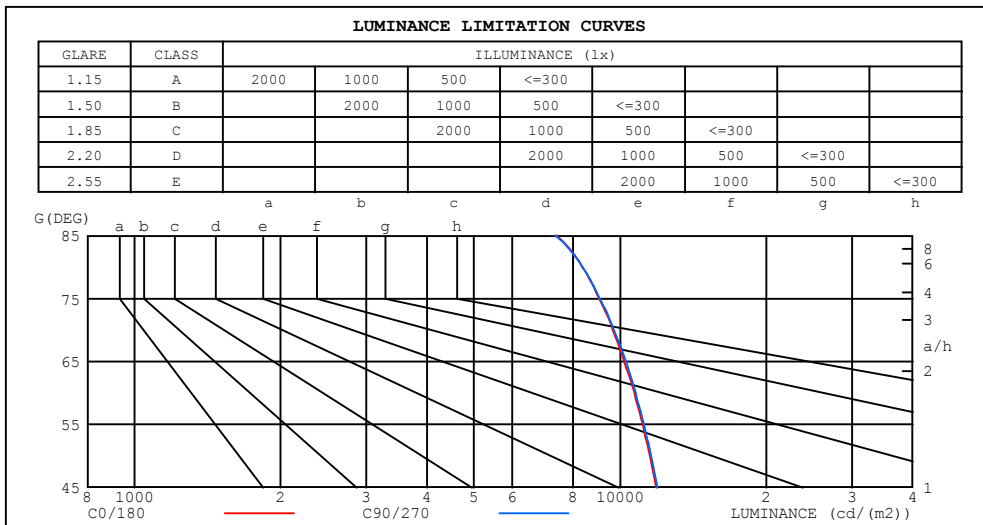

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	7381	7342
80	8375	8368
75	9067	9095
70	9662	9719
65	10204	10271
60	10684	10752
55	11116	11184
50	11506	11573
45	11854	11922


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-02-18

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:12.800m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:231.07V I:0.0346A P:7.2221W PF:0.9022 Freq:50.00Hz Lamp Flux:940.099x1 lm		
NAME: 0017440214	TYPE:	WEIGHT:
SPEC.:7.5W 5000K 850lm	DIM.:	SERIAL No.:
MFR.: LIT by CARDI	SUR.:0.025717385	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

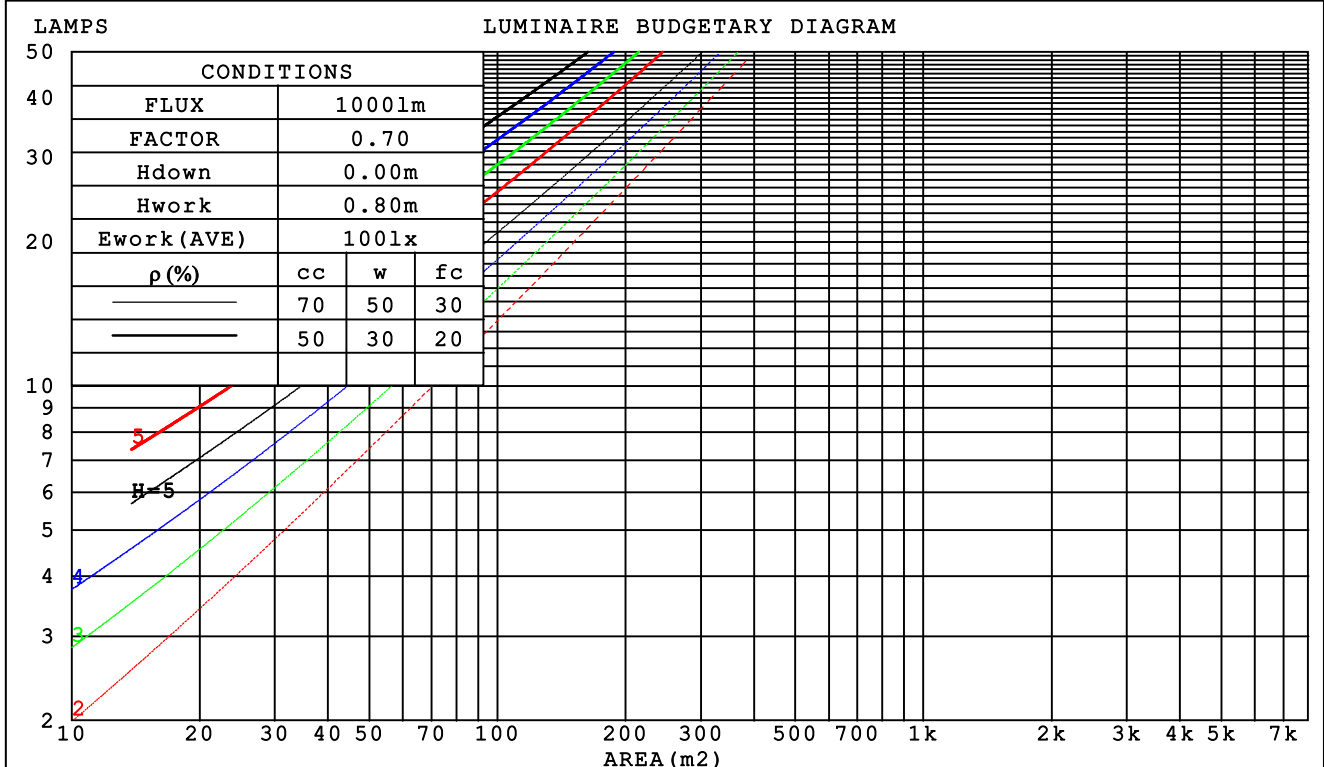

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-02-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:12.800m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:231.07V I:0.0346A P:7.2221W PF:0.9022 Freq:50.00Hz Lamp Flux:940.099x1 lm					
NAME: 0017440214			TYPE:		WEIGHT:
SPEC.:7.5W 5000K 850lm			DIM.:		SERIAL No.:
MFR.: LIT by CARDI			SUR.:0.025717385		Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0	
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
ρ_{fc}	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)										
0.0																	
1.0	.307	.174	.055	.299	.171	.054	.286	.164	.052	.273	.157	.051	.261	.152	.049		
2.0	.288	.158	.048	.282	.155	.048	.270	.150	.047	.259	.145	.045	.248	.140	.044		
3.0	.267	.142	.043	.261	.140	.042	.251	.136	.041	.241	.132	.040	.231	.128	.040		
4.0	.246	.128	.038	.241	.126	.037	.232	.123	.037	.223	.120	.036	.215	.117	.036		
5.0	.228	.116	.034	.224	.115	.033	.215	.112	.033	.207	.109	.033	.200	.107	.032		
6.0	.212	.106	.030	.208	.105	.030	.200	.103	.030	.193	.100	.029	.186	.098	.029		
7.0	.197	.097	.028	.193	.096	.027	.187	.094	.027	.180	.093	.027	.175	.091	.027		
8.0	.184	.090	.025	.181	.089	.025	.175	.087	.025	.169	.086	.025	.164	.084	.025		
9.0	.173	.084	.023	.170	.083	.023	.164	.081	.023	.159	.080	.023	.154	.078	.023		
10.0	.162	.078	.022	.160	.077	.022	.155	.076	.021	.150	.075	.021	.146	.073	.021		

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.196	.196	.196	.168	.168	.168	.115	.115	.115	.066	.066	.066	.021	.021	.021	
1.0	.186	.162	.140	.159	.139	.121	.109	.096	.084	.063	.055	.049	.020	.018	.016	
2.0	.178	.138	.104	.152	.119	.090	.104	.082	.063	.060	.048	.037	.019	.015	.012	
3.0	.170	.120	.081	.146	.104	.070	.100	.072	.049	.058	.042	.029	.019	.014	.009	
4.0	.162	.107	.065	.139	.092	.056	.096	.064	.040	.055	.038	.023	.018	.012	.008	
5.0	.155	.096	.054	.133	.083	.047	.092	.058	.033	.053	.034	.019	.017	.011	.006	
6.0	.148	.088	.045	.127	.076	.040	.088	.053	.028	.051	.031	.017	.016	.010	.005	
7.0	.141	.081	.039	.121	.070	.034	.084	.049	.024	.049	.029	.015	.016	.010	.005	
8.0	.134	.075	.035	.116	.065	.030	.080	.046	.022	.047	.027	.013	.015	.009	.004	
9.0	.128	.070	.031	.111	.061	.027	.077	.043	.019	.045	.025	.012	.014	.008	.004	
10.0	.123	.066	.029	.106	.057	.025	.073	.040	.018	.043	.024	.011	.014	.008	.004	

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-02-18

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:12.800m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:231.07V I:0.0346A P:7.2221W PF:0.9022 Freq:50.00Hz Lamp Flux:940.099x1 lm										
NAME: 0017440214					TYPE:			WEIGHT:		
SPEC.:7.5W 5000K 850lm					DIM.:			SERIAL No.:		
MFR.: LIT by CARDI					SUR.:0.025717385			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	21.1	22.6	21.4	22.8	23.0	21.1	22.6	21.4	22.9	23.1
3H	22.6	23.9	22.9	24.2	24.4	22.6	24.0	22.9	24.2	24.5
4H	23.2	24.5	23.5	24.7	25.0	23.2	24.5	23.5	24.8	25.0
6H	23.6	24.8	23.9	25.1	25.4	23.6	24.9	24.0	25.2	25.5
8H	23.8	24.9	24.1	25.2	25.6	23.8	25.0	24.1	25.3	25.6
12H	23.8	25.0	24.2	25.3	25.6	23.9	25.0	24.2	25.3	25.7
4H 2H	21.7	23.0	22.0	23.3	23.5	21.7	23.0	22.0	23.3	23.6
3H	23.3	24.5	23.7	24.8	25.1	23.4	24.5	23.7	24.8	25.2
4H	24.1	25.1	24.4	25.4	25.8	24.1	25.1	24.5	25.5	25.8
6H	24.6	25.6	25.0	25.9	26.3	24.7	25.6	25.1	26.0	26.3
8H	24.8	25.7	25.3	26.1	26.5	24.9	25.7	25.3	26.1	26.5
12H	25.0	25.8	25.4	26.2	26.6	25.0	25.8	25.5	26.2	26.6
8H 4H	24.3	25.2	24.8	25.6	26.0	24.4	25.2	24.8	25.6	26.0
6H	25.1	25.8	25.5	26.2	26.6	25.1	25.8	25.5	26.2	26.7
8H	25.3	26.0	25.8	26.4	26.9	25.4	26.0	25.9	26.5	26.9
12H	25.6	26.1	26.1	26.6	27.1	25.6	26.2	26.1	26.6	27.1
12H 4H	24.3	25.1	24.8	25.5	26.0	24.4	25.2	24.8	25.6	26.0
6H	25.1	25.8	25.6	26.2	26.7	25.2	25.8	25.6	26.2	26.7
8H	25.5	26.0	25.9	26.5	27.0	25.5	26.0	26.0	26.5	27.0
Variations with the observer position at spacings:										
S = 1.0H	+ 0.2 / - 0.2					+ 0.2 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.2					+ 0.2 / - 0.2				

CIE Pub.117, 940.1 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = -0.2)
Area: 0.0257174 m2

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-02-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:12.800m [K=1.0000]
Remarks:


```

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:12.800m [K=1.0000]
Remarks:

```

ISOCANDELA DIAGRAM

Test:U:231.07V I:0.0346A P:7.2221W PF:0.9022 Freq:50.00Hz Lamp Flux:940.099x1 lm		
NAME: 0017440214	TYPE:	WEIGHT:
SPEC.:7.5W 5000K 850lm	DIM.:	SERIAL No.:
MFR.: LIT by CARDI	SUR.:0.025717385	Shielding Angle:

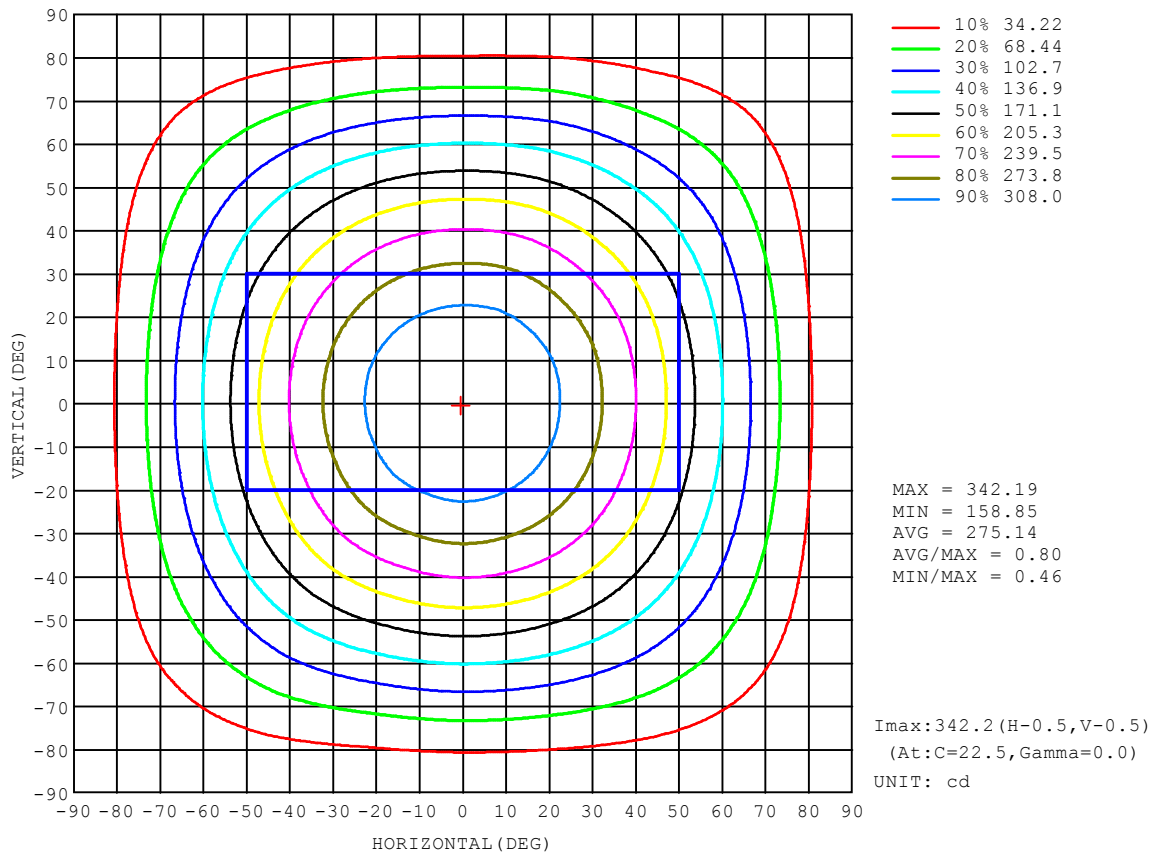


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2025-02-18

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:12.800m [K=1.0000]
 Remarks:

AAI Figure

Test:U:231.07V I:0.0346A P:7.2221W PF:0.9022 Freq:50.00Hz Lamp Flux:940.099x1 lm		
NAME: 0017440214	TYPE:	WEIGHT:
SPEC.:7.5W 5000K 850lm	DIM.:	SERIAL No.:
MFR.: LIT by CARDI	SUR.:0.025717385	Shielding Angle:

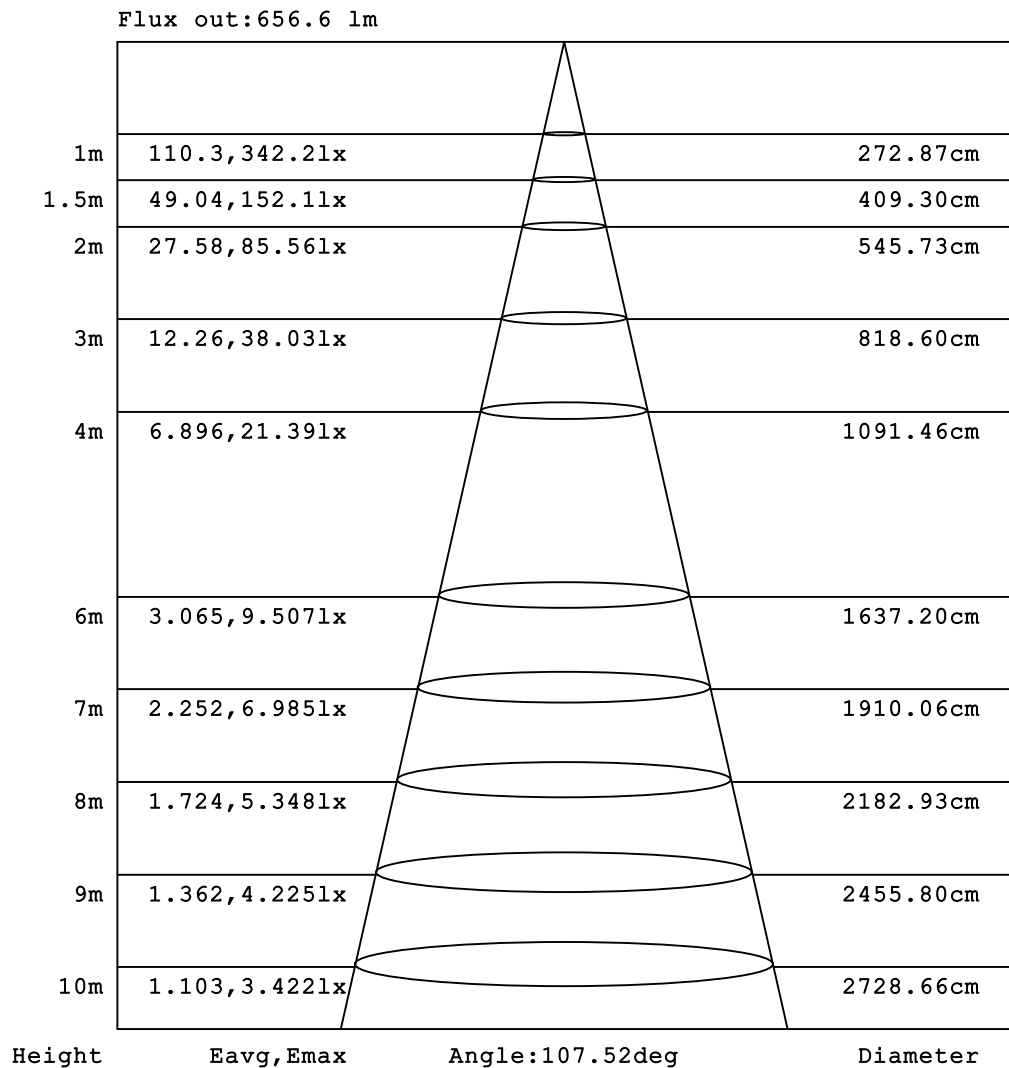


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-02-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:12.800m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:231.07V I:0.0346A P:7.2221W PF:0.9022 Freq:50.00Hz Lamp Flux:940.099x1 lm		
NAME: 0017440214	TYPE:	WEIGHT:
SPEC.:7.5W 5000K 850lm	DIM.:	SERIAL No.:
MFR.: LIT by CARDI	SUR.:0.025717385	Shielding Angle:

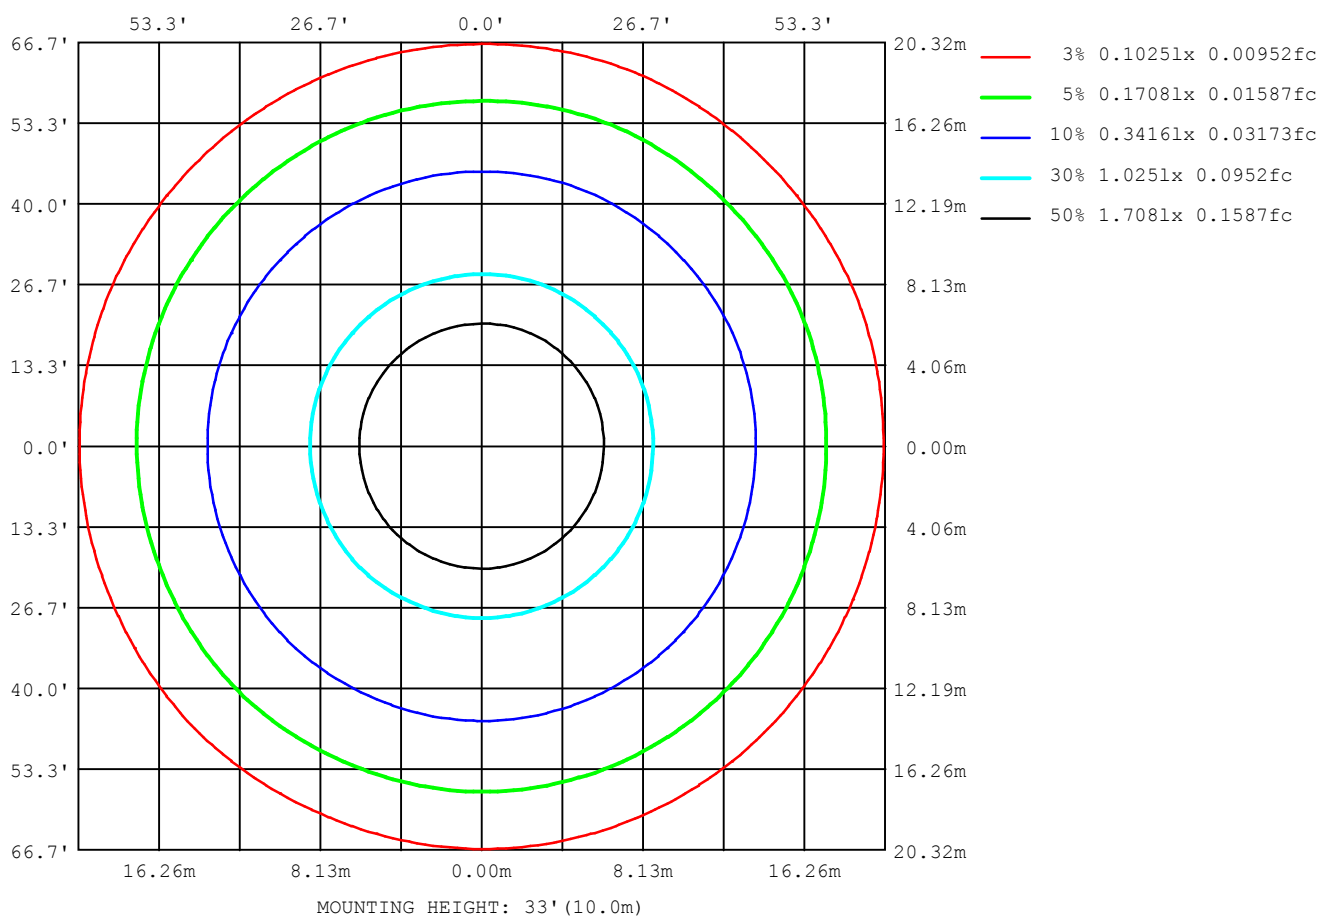

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-02-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:12.800m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:231.07V I:0.0346A P:7.2221W PF:0.9022 Freq:50.00Hz Lamp Flux:940.099x1 lm		
NAME: 0017440214	TYPE:	WEIGHT:
SPEC.:7.5W 5000K 850lm	DIM.:	SERIAL No.:
MFR.: LIT by CARDI	SUR.:0.025717385	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	10223
L_0~180 (75) av	9029
L_0~180 (85) av	7228
L_90~270 (65) av	10232
L_90~270 (75) av	8964
L_90~270 (85) av	6994
L_45 (65) av	10235
L_45 (75) av	9001
L_45 (85) av	7103

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-02-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:12.800m [K=1.0000]
Remarks:

Planar Illuminance Curve

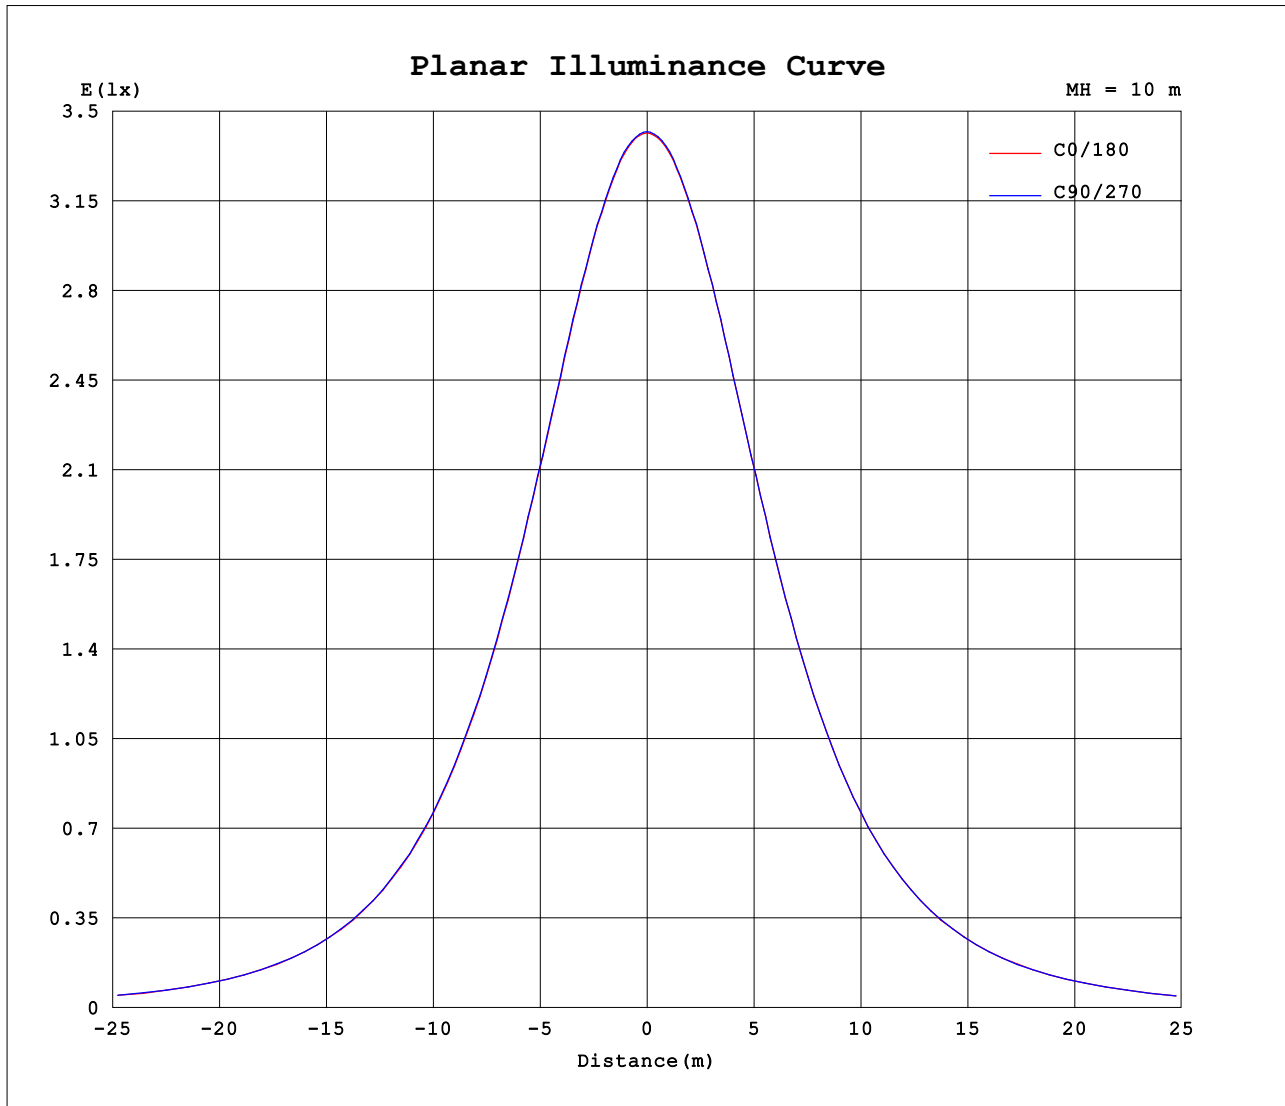

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2025-02-18

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.421
 Humidity: 65.0%
 Test Distance: 12.800m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:231.07V I:0.0346A P:7.2221W PF:0.9022 Freq:50.00Hz Lamp Flux:940.099x1 lm		
NAME: 0017440214	TYPE:	WEIGHT:
SPEC.:7.5W 5000K 850lm	DIM.:	SERIAL No.:
MFR.: LIT by CARDI	SUR.:0.025717385	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	342	342	342	342	342	342	342	342	342	342	342	342	342	342	342	342			
5	340	340	340	340	340	340	341	340	340	341	340	340	341	340	340	341			
10	335	335	335	335	335	335	336	335	335	336	335	335	336	336	336	336			
15	326	327	327	327	327	326	327	327	327	327	327	327	327	328	327	328			
20	315	315	315	315	316	315	316	315	315	316	316	315	315	316	316	316			
25	300	300	300	301	301	300	301	300	301	301	301	301	301	302	301	301			
30	283	282	283	283	283	282	284	282	283	284	283	283	283	285	284	284			
35	262	262	263	263	263	262	263	262	263	264	263	263	263	265	263	264			
40	240	240	240	241	241	239	241	239	240	241	240	240	241	242	241	242			
45	216	215	216	216	217	215	217	215	216	217	216	216	216	218	217	218			
50	190	190	191	191	191	190	191	190	191	191	191	191	191	193	191	192			
55	164	164	164	165	165	163	165	163	164	165	164	164	164	166	165	166			
60	137	137	138	138	138	137	138	137	138	138	138	137	138	139	138	139			
65	111	111	111	112	112	110	112	110	111	112	111	111	111	112	111	112			
70	85.0	84.1	85.4	84.9	85.5	83.1	85.3	83.2	84.5	85.8	84.2	84.6	83.7	86.1	84.1	86.3			
75	60.4	59.6	60.7	60.1	60.5	58.3	60.3	58.5	59.8	60.9	59.5	59.5	58.8	60.9	59.2	61.3			
80	37.4	36.8	37.6	37.1	37.4	35.2	37.0	35.6	36.8	37.7	36.4	36.3	35.6	37.6	36.2	38.2			
85	16.5	15.9	16.6	16.2	16.5	14.6	16.1	14.9	15.9	16.6	15.5	15.5	14.9	16.6	15.4	17.2			
90	0.52	0.51	0.52	0.51	0.53	0.51	0.52	0.51	0.16	0.19	0.16	0.16	0.15	0.20	0.15	0.24			
95	0.62	0.63	0.62	0.63	0.63	0.64	0.62	0.63	0.21	0.20	0.20	0.20	0.20	0.20	0.20	0.20			
100	0.77	0.78	0.77	0.78	0.78	0.78	0.77	0.78	0.28	0.27	0.27	0.27	0.27	0.27	0.27	0.27			
105	0.93	0.94	0.93	0.94	0.93	0.94	0.94	0.94	0.37	0.36	0.35	0.35	0.35	0.35	0.34	0.35			
110	1.10	1.10	1.10	1.10	1.10	1.12	1.10	1.11	0.47	0.45	0.45	0.45	0.45	0.44	0.45	0.44			
115	1.26	1.27	1.26	1.26	1.26	1.28	1.26	1.27	0.59	0.56	0.56	0.56	0.56	0.55	0.56	0.55			
120	1.42	1.43	1.42	1.43	1.42	1.44	1.42	1.43	0.72	0.68	0.68	0.68	0.68	0.67	0.68	0.68			
125	1.59	1.59	1.58	1.59	1.58	1.59	1.58	1.59	0.86	0.82	0.82	0.81	0.82	0.81	0.81	0.81			
130	1.73	1.73	1.73	1.73	1.73	1.73	1.73	1.74	1.01	0.96	0.97	0.96	0.97	0.95	0.96	0.96			
135	1.86	1.88	1.87	1.86	1.87	1.87	1.86	1.87	1.17	1.12	1.12	1.11	1.12	1.10	1.12	1.12			
140	1.99	2.00	1.99	1.99	1.99	2.00	1.99	1.99	1.32	1.29	1.28	1.27	1.28	1.26	1.28	1.28			
145	2.11	2.12	2.11	2.10	2.10	2.11	2.10	2.11	1.49	1.44	1.44	1.43	1.43	1.42	1.44	1.44			
150	2.20	2.22	2.20	2.20	2.19	2.20	2.19	2.21	1.66	1.61	1.62	1.61	1.60	1.59	1.62	1.62			
155	2.28	2.29	2.28	2.27	2.26	2.27	2.27	2.28	1.85	1.80	1.80	1.79	1.79	1.77	1.80	1.80			
160	2.36	2.36	2.35	2.34	2.33	2.34	2.34	2.35	2.02	1.97	1.96	1.95	1.95	1.94	1.96	1.97			
165	2.43	2.42	2.41	2.40	2.39	2.40	2.40	2.41	2.16	2.11	2.09	2.08	2.07	2.07	2.10	2.10			
170	2.46	2.45	2.44	2.43	2.42	2.43	2.44	2.44	2.27	2.23	2.22	2.20	2.20	2.19	2.21	2.23			
175	2.46	2.44	2.43	2.42	2.42	2.42	2.43	2.44	2.37	2.34	2.33	2.32	2.32	2.32	2.33	2.34			
180	2.42	2.41	2.40	2.39	2.40	2.39	2.40	2.40	2.45	2.41	2.41	2.39	2.40	2.40	2.40	2.41			

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-02-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:12.800m [K=1.0000]
Remarks: