


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:231.04V I:0.0682A P:14.857W PF:0.9432 Freq:50.00Hz Lamp Flux:1785.35x1 lm		
NAME: 0017440214	TYPE:	WEIGHT:
SPEC.:15W 5000K 1800lm	DIM.:	SERIAL No.:
MFR.: LIT by CARDI	SUR.:0.025717385	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 120.17 lm/W			
MODEL	5000K	I _{max} (cd)	648.4	S/MH (C0/180)	1.24
NOMINAL POWER(W)	15	LOR(%)	100.0	S/MH (C90/270)	1.24
RATED VOLTAGE(V)	230	TOTAL FLUX(lm)	1785.3	η UP,DN (C0-180)	0.5,49.8
NOMINAL FLUX(lm)	1785.35	CIE CLASS	DIRECT	η UP,DN (C180-360)	0.3,49.5
LAMPS INSIDE	1	η up (%)	0.8	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	230	η down (%)	99.2	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

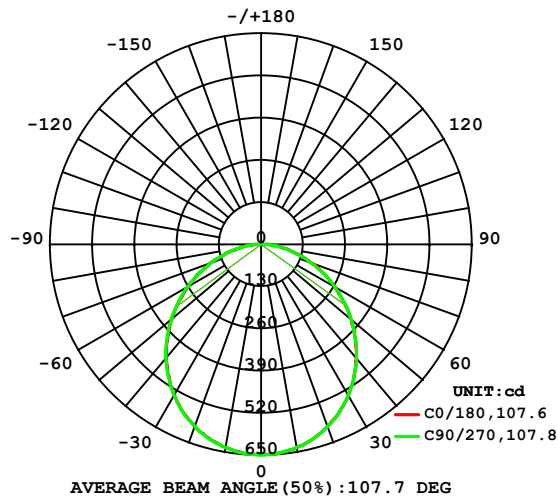

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

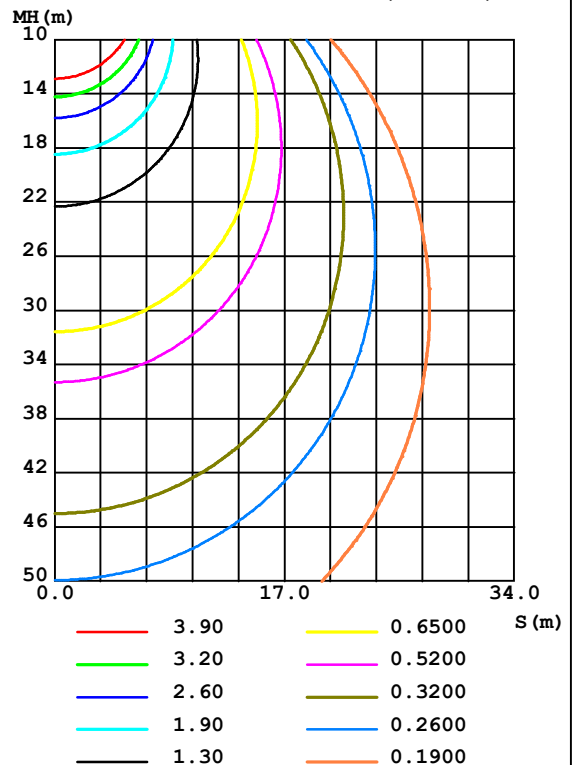

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-02-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:12.800m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	636.0	635.9	635.9	636.1	635.4	635.9	635.5	635.9	0- 10	61.28	61.28	3.43,3.43
20	598.4	597.8	598.6	598.3	597.6	598.6	598.3	598.7	10- 20	174.9	236.2	13.2,13.2
30	537.9	536.9	537.8	537.7	536.1	537.4	537.3	537.6	20- 30	262.8	499.0	27.9,27.9
40	457.0	456.2	457.6	456.9	455.0	456.5	456.9	456.9	30- 40	312.1	811.0	45.4,45.4
50	363.2	362.3	363.9	362.9	360.9	362.0	362.4	362.7	40- 50	316.8	1128	63.2,63.2
60	263.0	262.0	263.1	262.2	260.1	261.2	261.2	262.0	50- 60	279.5	1407	78.8,78.8
70	163.3	162.5	162.7	161.7	160.3	161.1	160.4	161.2	60- 70	209.2	1616	90.5,90.5
80	72.55	71.62	71.07	70.11	68.43	69.06	67.59	68.80	70- 80	121.0	1737	97.3,97.3
90	1.013	0.9898	1.018	0.9936	0.2941	0.2874	0.2889	0.2906	80- 90	34.19	1772	99.2,99.2
100	1.447	1.456	1.452	1.456	0.5309	0.5206	0.5207	0.5173	90-100	0.8606	1773	99.3,99.3
110	2.069	2.081	2.084	2.079	0.8921	0.8669	0.8689	0.8670	100-110	1.295	1774	99.4,99.4
120	2.699	2.707	2.709	2.702	1.353	1.310	1.314	1.311	110-120	1.723	1776	99.5,99.5
130	3.290	3.292	3.302	3.285	1.903	1.860	1.864	1.856	120-130	2.055	1778	99.6,99.6
140	3.785	3.800	3.787	3.785	2.502	2.465	2.464	2.472	130-140	2.209	1780	99.7,99.7
150	4.182	4.189	4.179	4.177	3.135	3.093	3.079	3.104	140-150	2.120	1782	99.8,99.8
160	4.424	4.419	4.402	4.412	3.820	3.748	3.727	3.756	150-160	1.786	1784	99.9,99.9
170	4.618	4.596	4.566	4.598	4.262	4.235	4.214	4.230	160-170	1.203	1785	100,100
180	4.615	4.598	4.586	4.596	4.618	4.596	4.578	4.595	170-180	0.4295	1785	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-02-18

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:12.800m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:231.04V I:0.0682A P:14.857W PF:0.9432 Freq:50.00Hz Lamp Flux:1785.35x1 lm		
NAME: 0017440214	TYPE:	WEIGHT:
SPEC.:15W 5000K 1800lm	DIM.:	SERIAL No.:
MFR.: LIT by CARDI	SUR.:0.025717385	Shielding Angle:

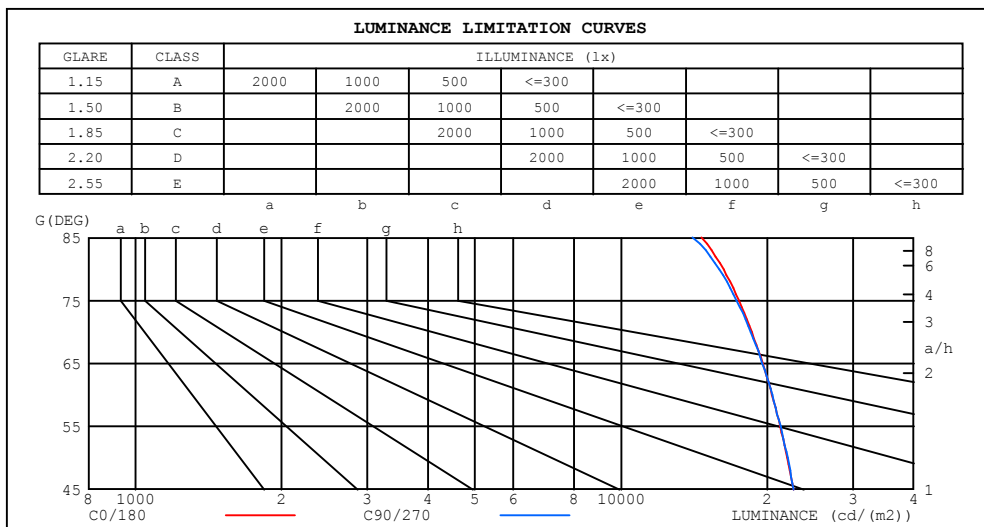

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	14618	14036
80	16245	15913
75	17475	17298
70	18566	18495
65	19557	19536
60	20449	20461
55	21256	21283
50	21973	22012
45	22628	22659


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-02-18

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:12.800m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:231.04V I:0.0682A P:14.857W PF:0.9432 Freq:50.00Hz Lamp Flux:1785.35x1 lm		
NAME: 0017440214	TYPE:	WEIGHT:
SPEC.:15W 5000K 1800lm	DIM.:	SERIAL No.:
MFR.: LIT by CARDI	SUR.:0.025717385	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

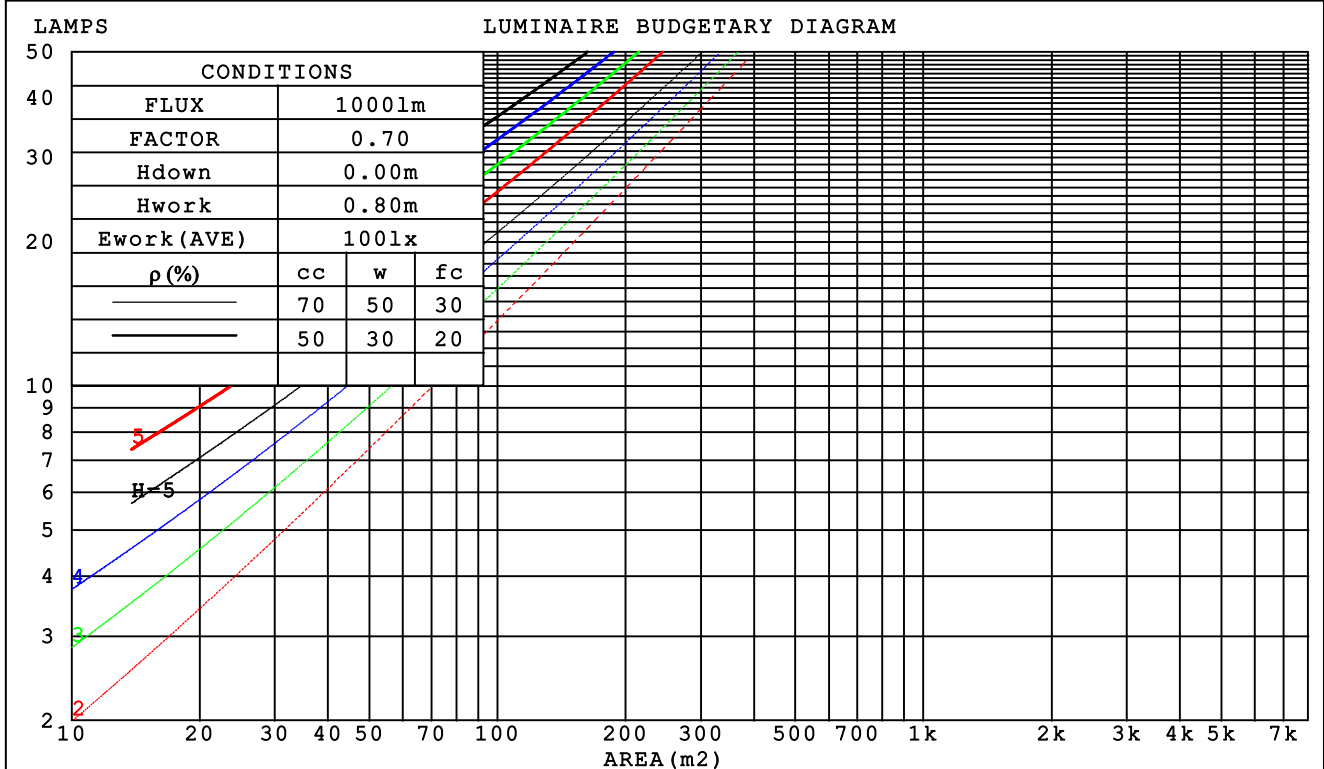

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-02-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:12.800m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:231.04V I:0.0682A P:14.857W PF:0.9432 Freq:50.00Hz Lamp Flux:1785.35x1 lm					
NAME: 0017440214			TYPE:		WEIGHT:
SPEC.:15W 5000K 1800lm			DIM.:		SERIAL No.:
MFR.: LIT by CARDI			SUR.:0.025717385		Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0	
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
ρ_{fc}	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)										
0.0																	
1.0	.307	.174	.055	.299	.171	.054	.286	.164	.052	.273	.158	.051	.262	.152	.049		
2.0	.288	.158	.049	.282	.155	.048	.270	.150	.047	.259	.145	.045	.249	.141	.044		
3.0	.267	.142	.043	.261	.140	.042	.251	.136	.041	.241	.132	.040	.232	.128	.040		
4.0	.247	.128	.038	.242	.126	.037	.232	.123	.037	.223	.120	.036	.215	.117	.036		
5.0	.228	.116	.034	.224	.115	.033	.215	.112	.033	.207	.109	.033	.200	.107	.032		
6.0	.212	.106	.030	.208	.105	.030	.200	.103	.030	.193	.100	.030	.187	.098	.029		
7.0	.197	.097	.028	.194	.096	.027	.187	.094	.027	.181	.093	.027	.175	.091	.027		
8.0	.184	.090	.025	.181	.089	.025	.175	.087	.025	.169	.086	.025	.164	.084	.025		
9.0	.173	.084	.023	.170	.083	.023	.164	.081	.023	.159	.080	.023	.154	.078	.023		
10.0	.162	.078	.022	.160	.077	.022	.155	.076	.021	.150	.075	.021	.146	.073	.021		

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.196	.196	.196	.168	.168	.168	.115	.115	.115	.066	.066	.066	.021	.021	.021	
1.0	.186	.162	.140	.159	.139	.121	.109	.096	.084	.063	.055	.049	.020	.018	.016	
2.0	.178	.138	.104	.152	.119	.090	.104	.082	.063	.060	.048	.037	.019	.015	.012	
3.0	.170	.120	.081	.146	.104	.070	.100	.072	.049	.058	.042	.029	.019	.014	.009	
4.0	.162	.107	.065	.139	.092	.056	.096	.064	.040	.055	.038	.023	.018	.012	.008	
5.0	.155	.096	.054	.133	.083	.047	.092	.058	.033	.053	.034	.019	.017	.011	.006	
6.0	.148	.088	.045	.127	.076	.040	.088	.053	.028	.051	.031	.017	.016	.010	.005	
7.0	.141	.081	.039	.121	.070	.034	.084	.049	.024	.049	.029	.015	.016	.010	.005	
8.0	.134	.075	.035	.116	.065	.030	.080	.046	.022	.047	.027	.013	.015	.009	.004	
9.0	.128	.070	.031	.111	.061	.027	.077	.043	.019	.045	.025	.012	.014	.008	.004	
10.0	.123	.066	.029	.106	.057	.025	.073	.040	.018	.043	.024	.011	.014	.008	.004	

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-02-18

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:12.800m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:231.04V I:0.0682A P:14.857W PF:0.9432 Freq:50.00Hz Lamp Flux:1785.35x1 lm										
NAME: 0017440214					TYPE:			WEIGHT:		
SPEC.:15W 5000K 1800lm					DIM.:			SERIAL No.:		
MFR.: LIT by CARDI					SUR.:0.025717385			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	23.4	24.9	23.7	25.1	25.3	23.4	24.9	23.7	25.1	25.3
3H	24.9	26.2	25.2	26.5	26.7	24.9	26.2	25.2	26.5	26.7
4H	25.5	26.8	25.8	27.1	27.3	25.5	26.8	25.8	27.0	27.3
6H	25.9	27.2	26.3	27.5	27.7	25.9	27.1	26.2	27.4	27.7
8H	26.1	27.3	26.4	27.6	27.9	26.0	27.2	26.4	27.5	27.8
12H	26.2	27.3	26.5	27.6	28.0	26.1	27.3	26.5	27.6	27.9
4H 2H	24.0	25.3	24.3	25.6	25.8	24.0	25.3	24.3	25.6	25.8
3H	25.6	26.8	26.0	27.1	27.4	25.6	26.8	26.0	27.1	27.4
4H	26.4	27.4	26.8	27.8	28.1	26.4	27.4	26.8	27.8	28.1
6H	27.0	27.9	27.4	28.3	28.6	26.9	27.9	27.3	28.2	28.6
8H	27.2	28.1	27.6	28.4	28.8	27.1	28.0	27.6	28.4	28.8
12H	27.3	28.1	27.8	28.5	29.0	27.3	28.1	27.7	28.5	28.9
8H 4H	26.6	27.5	27.1	27.9	28.3	26.6	27.5	27.1	27.9	28.3
6H	27.4	28.1	27.8	28.5	29.0	27.4	28.1	27.8	28.5	28.9
8H	27.7	28.3	28.2	28.8	29.2	27.7	28.3	28.1	28.7	29.2
12H	27.9	28.5	28.4	28.9	29.4	27.9	28.4	28.4	28.9	29.4
12H 4H	26.7	27.5	27.1	27.9	28.3	26.6	27.4	27.1	27.8	28.3
6H	27.5	28.1	27.9	28.5	29.0	27.4	28.1	27.9	28.5	29.0
8H	27.8	28.4	28.3	28.8	29.3	27.8	28.3	28.3	28.8	29.3
Variations with the observer position at spacings:										
S = 1.0H	+ 0.2 / - 0.2					+ 0.2 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.2					+ 0.2 / - 0.2				

CIE Pub.117, 1785 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 2.0)
Area: 0.0257174 m2

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-02-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:12.800m [K=1.0000]
Remarks:


```

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:12.800m [K=1.0000]
Remarks:

```

ISOCANDELA DIAGRAM

Test:U:231.04V I:0.0682A P:14.857W PF:0.9432 Freq:50.00Hz Lamp Flux:1785.35x1 lm		
NAME: 0017440214	TYPE:	WEIGHT:
SPEC.:15W 5000K 1800lm	DIM.:	SERIAL No.:
MFR.: LIT by CARDI	SUR.:0.025717385	Shielding Angle:

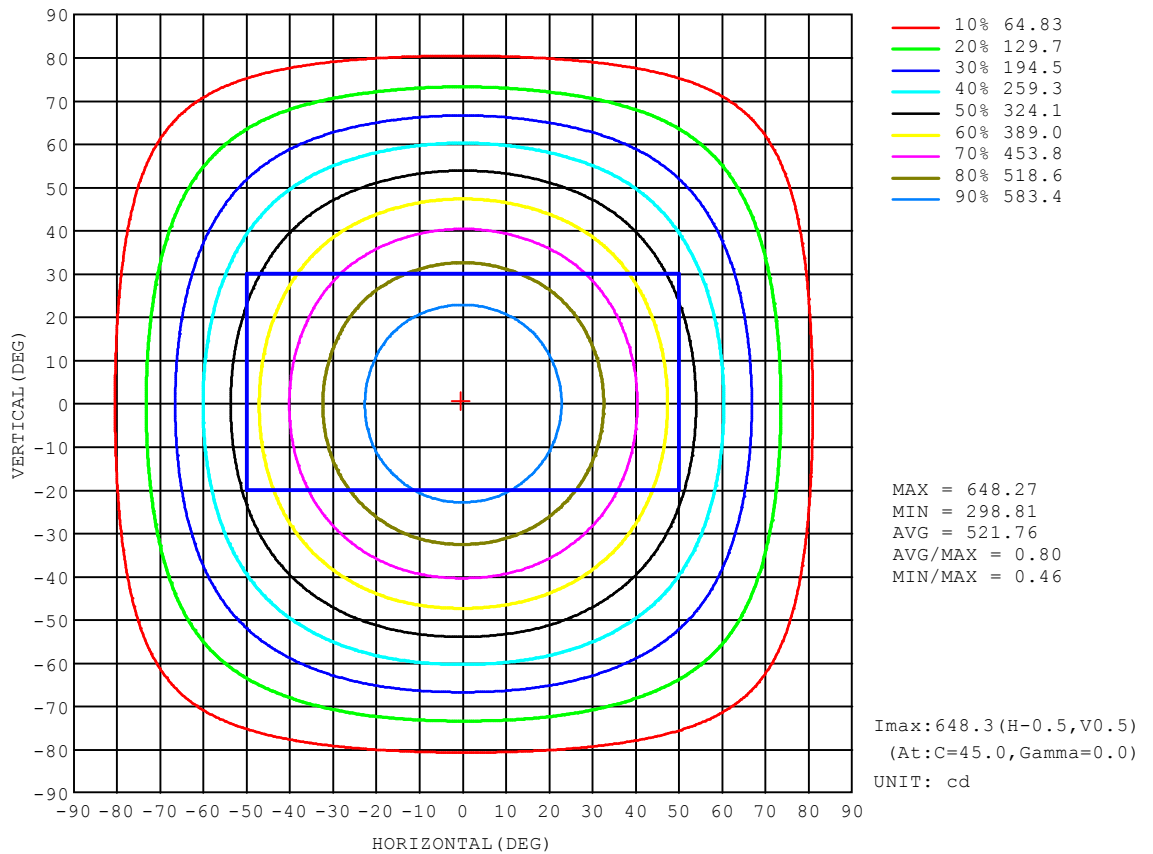


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2025-02-18

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:12.800m [K=1.0000]
 Remarks:

AAI Figure

Test:U:231.04V I:0.0682A P:14.857W PF:0.9432 Freq:50.00Hz Lamp Flux:1785.35x1 lm		
NAME: 0017440214	TYPE:	WEIGHT:
SPEC.:15W 5000K 1800lm	DIM.:	SERIAL No.:
MFR.: LIT by CARDI	SUR.:0.025717385	Shielding Angle:

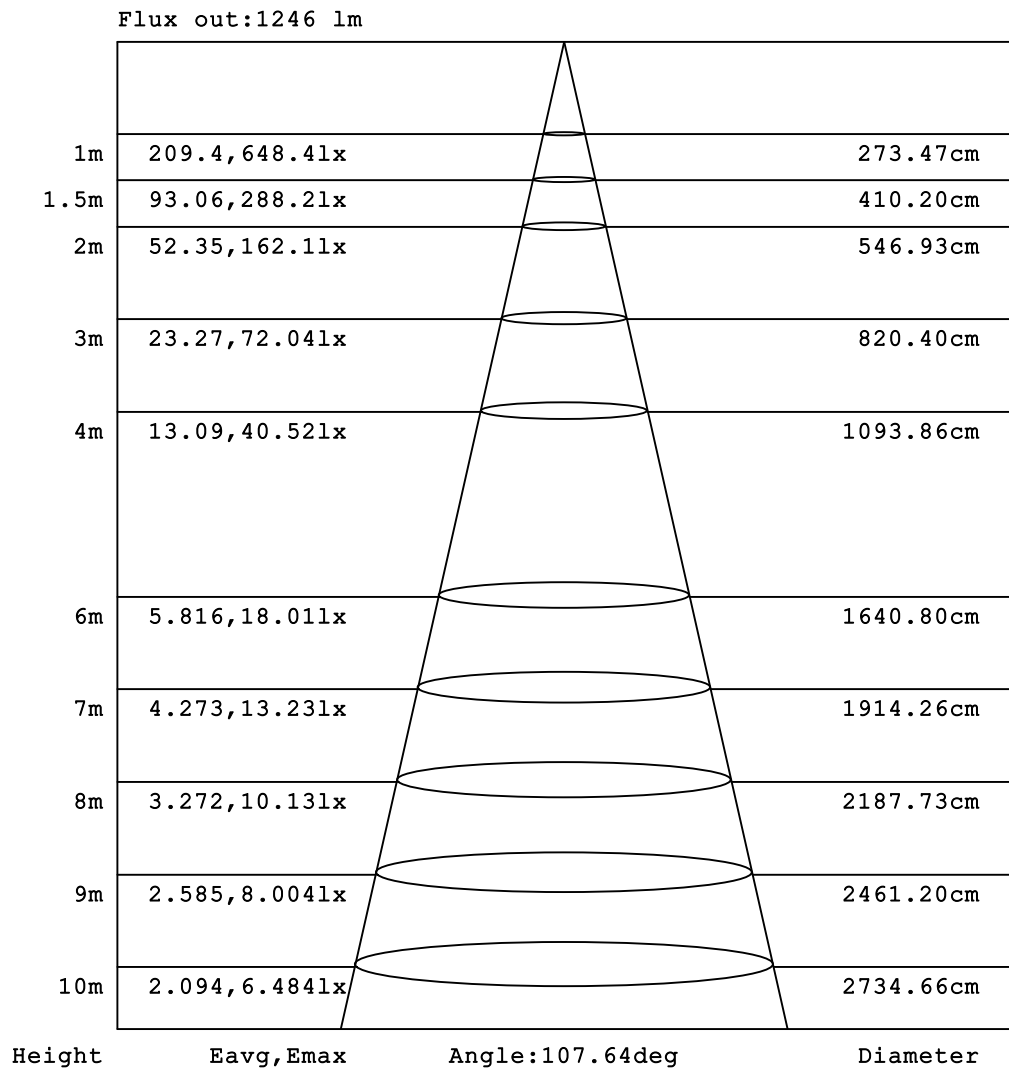


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-02-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:12.800m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:231.04V I:0.0682A P:14.857W PF:0.9432 Freq:50.00Hz Lamp Flux:1785.35x1 lm		
NAME: 0017440214	TYPE:	WEIGHT:
SPEC.:15W 5000K 1800lm	DIM.:	SERIAL No.:
MFR.: LIT by CARDI	SUR.:0.025717385	Shielding Angle:

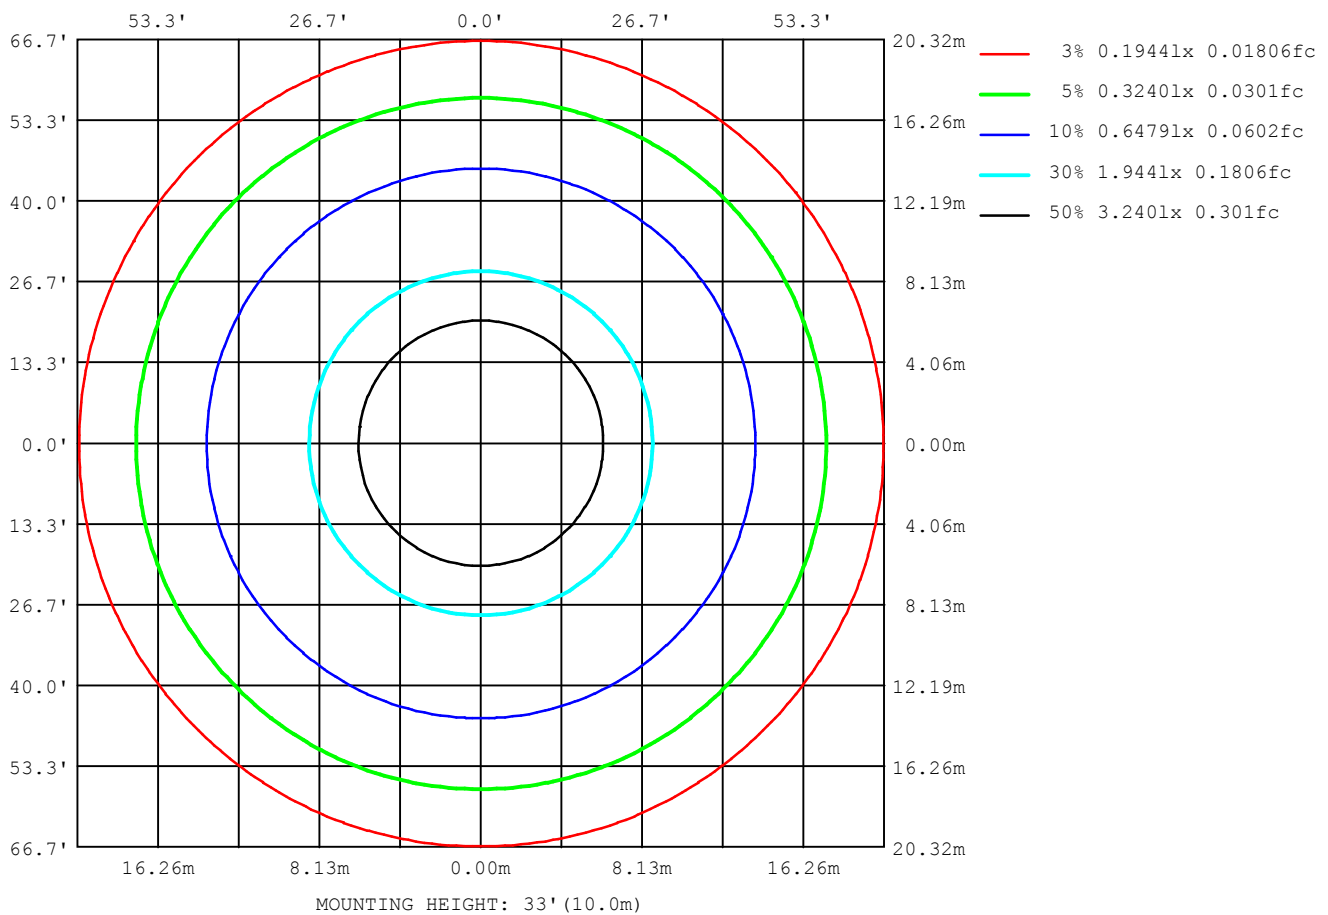

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-02-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:12.800m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:231.04V I:0.0682A P:14.857W PF:0.9432 Freq:50.00Hz Lamp Flux:1785.35x1 lm		
NAME: 0017440214	TYPE:	WEIGHT:
SPEC.:15W 5000K 1800lm	DIM.:	SERIAL No.:
MFR.: LIT by CARDI	SUR.:0.025717385	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	19427
L_0~180 (75) av	17254
L_0~180 (85) av	13741
L_90~270 (65) av	19449
L_90~270 (75) av	17124
L_90~270 (85) av	13294
L_45 (65) av	19438
L_45 (75) av	17185
L_45 (85) av	13486

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-02-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:12.800m [K=1.0000]
Remarks:

Planar Illuminance Curve

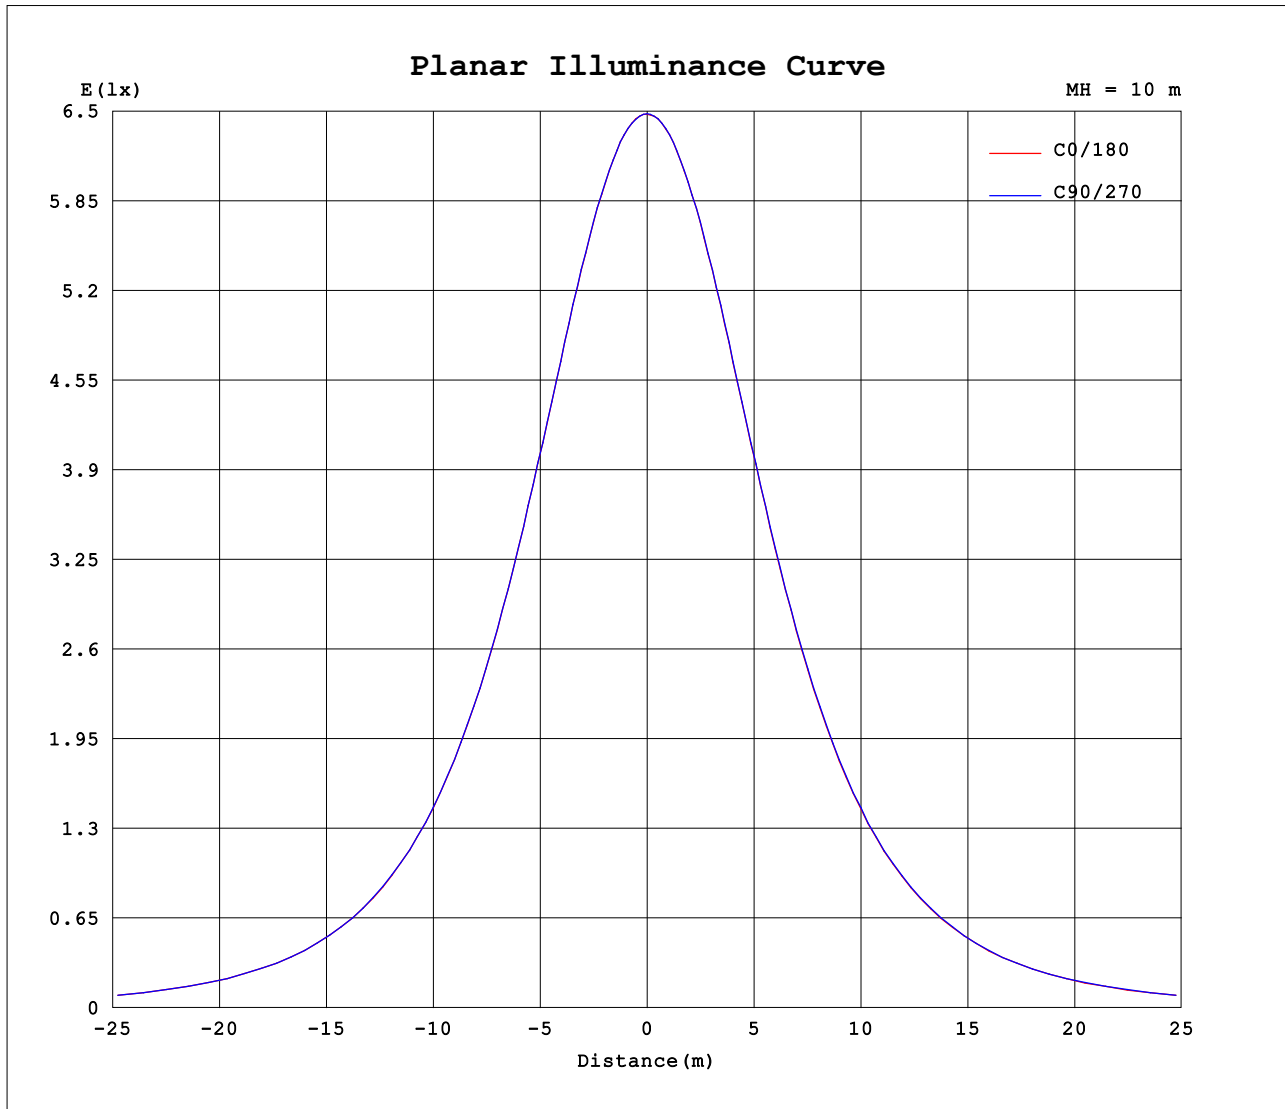

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2025-02-18

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.421
 Humidity: 65.0%
 Test Distance: 12.800m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:231.04V I:0.0682A P:14.857W PF:0.9432 Freq:50.00Hz Lamp Flux:1785.35x1 lm		
NAME: 0017440214	TYPE:	WEIGHT:
SPEC.:15W 5000K 1800lm	DIM.:	SERIAL No.:
MFR.: LIT by CARDI	SUR.:0.025717385	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	648	648	648	648	648	648	648	648	648	648	648	648	648	648	648	648			
5	645	645	645	645	645	645	645	645	645	645	645	645	645	645	645	645			
10	636	636	636	636	636	636	636	636	635	635	636	635	636	635	636	636			
15	620	620	619	621	620	621	620	620	619	619	620	620	620	620	621	620			
20	598	598	598	599	599	599	598	599	598	598	599	598	598	598	599	598			
25	571	571	570	571	571	572	571	571	570	569	571	570	571	570	571	570			
30	538	538	537	538	538	539	538	538	536	536	537	537	537	537	538	537			
35	500	499	499	500	500	501	499	499	497	497	499	499	499	499	499	499			
40	457	457	456	458	458	459	457	457	455	455	456	456	457	456	457	456			
45	411	412	411	412	412	413	411	411	409	409	411	410	411	410	411	410			
50	363	363	362	364	364	365	363	363	361	361	362	362	362	362	363	362			
55	314	314	313	314	314	315	313	313	311	311	312	311	312	311	313	312			
60	263	264	262	264	263	264	262	262	260	260	261	260	261	260	262	261			
65	213	213	212	213	212	213	212	212	210	209	211	209	210	209	211	211			
70	163	164	162	163	163	163	162	162	160	160	161	160	160	159	161	161			
75	116	117	116	116	115	116	114	115	113	113	114	112	113	112	114	114			
80	72.5	72.2	71.6	71.3	71.1	70.5	70.1	69.8	68.4	69.1	69.1	68.3	67.6	67.8	68.8	70.2			
85	32.8	32.3	31.7	31.5	31.5	30.8	30.5	30.2	28.8	29.4	29.2	28.8	28.1	28.5	29.4	30.7			
90	1.01	0.98	0.99	0.97	1.02	0.97	0.99	0.95	0.29	0.30	0.29	0.30	0.29	0.30	0.29	0.33			
95	1.17	1.17	1.18	1.18	1.18	1.17	1.18	1.18	0.39	0.39	0.39	0.39	0.38	0.38	0.38	0.38			
100	1.45	1.45	1.46	1.46	1.45	1.45	1.46	1.46	0.53	0.53	0.52	0.52	0.52	0.52	0.52	0.52			
105	1.75	1.76	1.76	1.76	1.76	1.76	1.76	1.77	0.70	0.69	0.68	0.68	0.69	0.68	0.68	0.69			
110	2.07	2.08	2.08	2.08	2.08	2.08	2.08	2.08	0.89	0.87	0.87	0.87	0.87	0.86	0.87	0.87			
115	2.38	2.39	2.40	2.40	2.40	2.40	2.39	2.39	1.11	1.09	1.07	1.07	1.08	1.08	1.07	1.08			
120	2.70	2.70	2.71	2.71	2.71	2.71	2.70	2.71	1.35	1.32	1.31	1.31	1.31	1.31	1.31	1.32			
125	3.01	3.01	3.01	3.02	3.01	3.01	3.01	3.01	1.62	1.59	1.58	1.57	1.58	1.58	1.57	1.59			
130	3.29	3.29	3.29	3.30	3.30	3.29	3.29	3.30	1.90	1.88	1.86	1.86	1.86	1.86	1.86	1.88			
135	3.55	3.55	3.55	3.56	3.56	3.56	3.55	3.56	2.20	2.17	2.16	2.16	2.16	2.16	2.16	2.17			
140	3.78	3.79	3.80	3.79	3.79	3.78	3.78	3.79	2.50	2.49	2.46	2.46	2.46	2.47	2.47	2.48			
145	4.00	4.01	4.01	4.00	4.00	4.00	3.99	4.01	2.80	2.79	2.76	2.75	2.76	2.76	2.78	2.78			
150	4.18	4.20	4.19	4.17	4.18	4.18	4.18	4.19	3.13	3.11	3.09	3.08	3.08	3.08	3.10	3.11			
155	4.31	4.33	4.31	4.30	4.30	4.29	4.30	4.31	3.51	3.46	3.43	3.41	3.41	3.42	3.45	3.47			
160	4.42	4.43	4.42	4.40	4.40	4.41	4.41	4.43	3.82	3.78	3.75	3.74	3.73	3.73	3.76	3.78			
165	4.56	4.55	4.54	4.51	4.52	4.52	4.54	4.56	4.05	4.01	4.00	3.98	3.98	3.98	4.00	4.01			
170	4.62	4.60	4.60	4.57	4.57	4.57	4.60	4.61	4.26	4.25	4.23	4.21	4.21	4.21	4.23	4.24			
175	4.66	4.65	4.62	4.62	4.62	4.63	4.63	4.66	4.48	4.47	4.44	4.43	4.44	4.44	4.45	4.47			
180	4.61	4.61	4.60	4.59	4.59	4.58	4.60	4.62	4.62	4.61	4.60	4.59	4.58	4.59	4.59	4.61			

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-02-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:12.800m [K=1.0000]
Remarks: