


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:231.07V I:0.0436A P:9.0570W PF:0.8993 Freq:50.00Hz Lamp Flux:1227.16x1 lm					
NAME: 0017440215		TYPE:		WEIGHT:	
SPEC.:9W 3000K 1050lm		DIM.:		SERIAL No.:	
MFR.: LIT by CARDI		SUR.:0.04985046		Shielding Angle:	

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 135.49 lm/W
MODEL	3000K	I _{max} (cd)	447.1	S/MH (C0/180)	1.23	
NOMINAL POWER(W)	9	LOR(%)	100.0	S/MH (C90/270)	1.24	
RATED VOLTAGE(V)	230	TOTAL FLUX(lm)	1227.2	η UP,DN (C0-180)	0.5,49.0	
NOMINAL FLUX(lm)	1227.16	CIE CLASS	DIRECT	η UP,DN (C180-360)	0.3,50.2	
LAMPS INSIDE	1	η up (%)	0.8	CIBSE SHR NOM	1.25	
TEST VOLTAGE(V)	230	η down (%)	99.2	CIBSE SHR MAX	1.35	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

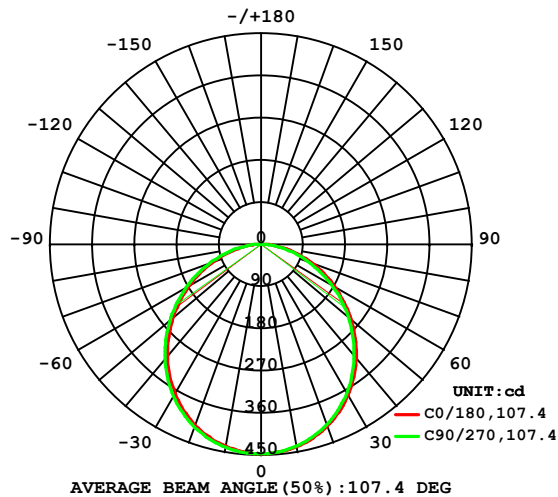

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

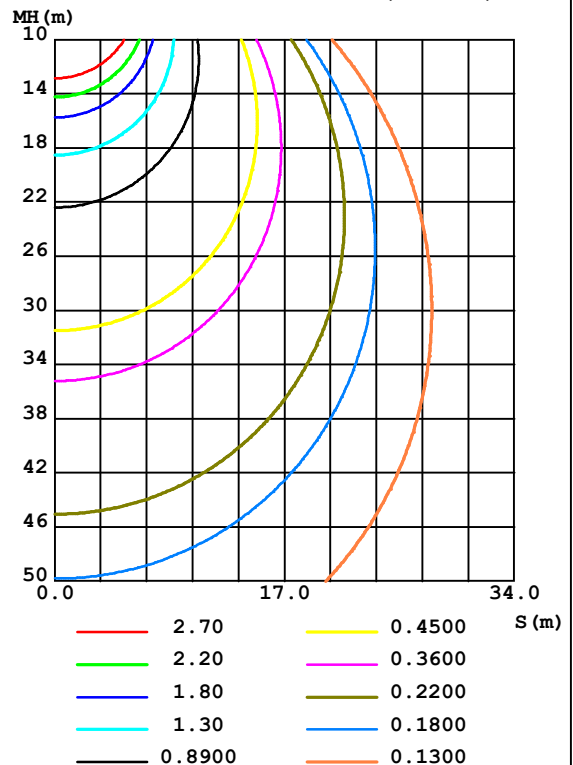

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2025-02-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity: 65.0%
Test Distance: 12.800m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	438.6	437.0	436.9	437.6	437.4	439.2	439.7	439.0	0- 10	42.24	42.24	3.44,3.44
20	413.2	410.0	409.8	410.8	410.9	414.5	415.1	413.8	10- 20	120.5	162.8	13.3,13.3
30	371.5	367.0	366.3	367.8	367.8	373.4	374.3	372.0	20- 30	181.0	343.8	28,28
40	316.2	310.7	309.5	311.2	311.3	318.1	319.2	316.4	30- 40	214.8	558.6	45.5,45.5
50	251.3	245.2	244.0	245.7	245.7	253.4	254.4	251.5	40- 50	217.7	776.3	63.3,63.3
60	182.3	175.7	174.3	176.3	176.4	183.7	184.8	182.4	50- 60	191.7	968.0	78.9,78.9
70	113.7	106.9	105.8	108.1	108.1	114.4	115.4	113.7	60- 70	143.3	1111	90.6,90.6
80	51.08	44.80	44.03	46.46	45.52	50.45	51.18	50.20	70- 80	82.70	1194	97.3,97.3
90	0.7723	0.6675	0.6708	0.6688	0.2097	0.5110	0.7371	0.2684	80- 90	23.76	1218	99.2,99.2
100	0.9741	1.013	1.027	1.017	0.3820	0.3516	0.3447	0.3566	90-100	0.6098	1218	99.3,99.3
110	1.394	1.437	1.449	1.432	0.6235	0.5863	0.5796	0.5898	100-110	0.8914	1219	99.4,99.4
120	1.819	1.861	1.873	1.855	0.9365	0.8870	0.8754	0.8853	110-120	1.179	1220	99.5,99.5
130	2.222	2.258	2.275	2.253	1.311	1.247	1.242	1.257	120-130	1.400	1222	99.6,99.6
140	2.562	2.603	2.608	2.589	1.715	1.663	1.651	1.664	130-140	1.503	1223	99.7,99.7
150	2.836	2.863	2.865	2.850	2.154	2.091	2.074	2.100	140-150	1.443	1225	99.8,99.8
160	3.039	3.042	3.032	3.037	2.605	2.539	2.519	2.544	150-160	1.218	1226	99.9,99.9
170	3.172	3.150	3.130	3.152	2.926	2.877	2.843	2.877	160-170	0.8211	1227	100,100
180	3.154	3.128	3.118	3.127	3.157	3.128	3.113	3.125	170-180	0.2928	1227	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-02-18

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:12.800m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:231.07V I:0.0436A P:9.0570W PF:0.8993 Freq:50.00Hz Lamp Flux:1227.16x1 lm		
NAME: 0017440215	TYPE:	WEIGHT:
SPEC.:9W 3000K 1050lm	DIM.:	SERIAL No.:
MFR.: LIT by CARDI	SUR.:0.04985046	Shielding Angle:

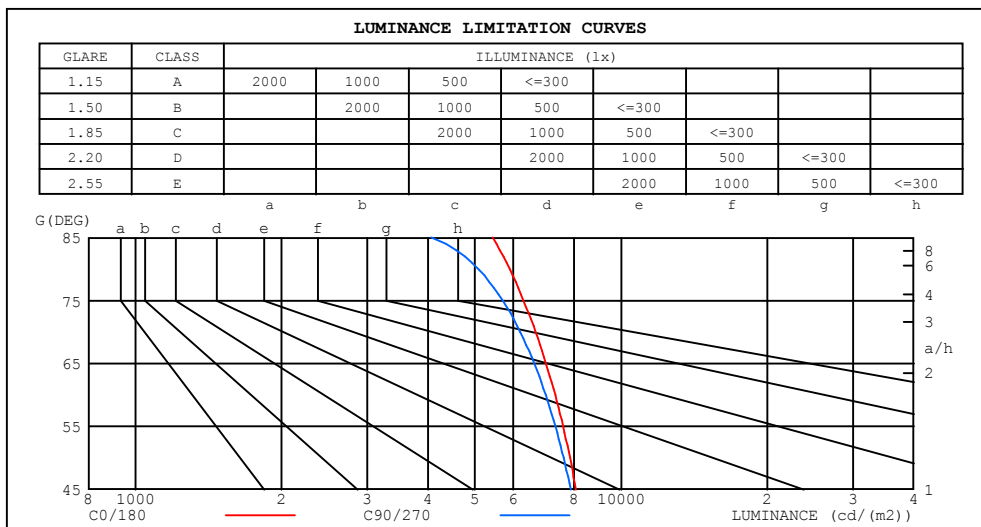

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	5436	4064
80	5901	5086
75	6297	5707
70	6666	6203
65	7006	6625
60	7314	6993
55	7592	7322
50	7843	7614
45	8073	7873


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-02-18

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:12.800m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:231.07V I:0.0436A P:9.0570W PF:0.8993 Freq:50.00Hz Lamp Flux:1227.16x1 lm		
NAME: 0017440215	TYPE:	WEIGHT:
SPEC.:9W 3000K 1050lm	DIM.:	SERIAL No.:
MFR.: LIT by CARDI	SUR.:0.04985046	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

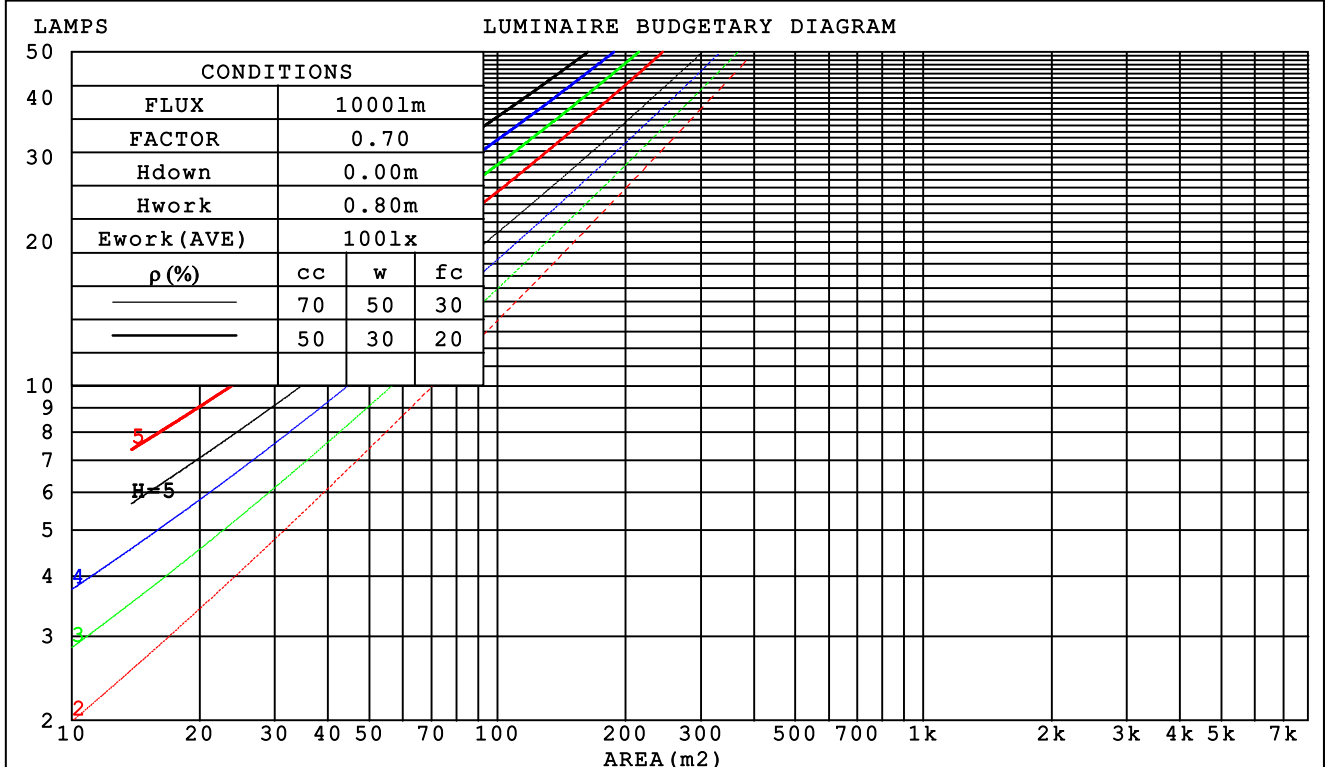

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-02-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:12.800m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:231.07V I:0.0436A P:9.0570W PF:0.8993 Freq:50.00Hz Lamp Flux:1227.16x1 lm					
NAME: 0017440215			TYPE:		WEIGHT:
SPEC.:9W 3000K 1050lm			DIM.:		SERIAL No.:
MFR.: LIT by CARDI			SUR.:0.04985046		Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)									
0.0																
1.0	.307	.174	.055	.299	.171	.054	.286	.164	.052	.273	.157	.051	.261	.152	.049	
2.0	.288	.158	.048	.282	.155	.048	.270	.150	.047	.259	.145	.045	.248	.140	.044	
3.0	.267	.142	.043	.261	.140	.042	.250	.136	.041	.241	.132	.040	.231	.128	.040	
4.0	.246	.128	.038	.241	.126	.037	.232	.123	.037	.223	.120	.036	.215	.117	.036	
5.0	.228	.116	.034	.223	.115	.033	.215	.112	.033	.207	.109	.033	.200	.107	.032	
6.0	.212	.106	.030	.208	.105	.030	.200	.103	.030	.193	.100	.029	.186	.098	.029	
7.0	.197	.097	.028	.193	.096	.027	.187	.094	.027	.180	.092	.027	.174	.091	.027	
8.0	.184	.090	.025	.181	.089	.025	.175	.087	.025	.169	.086	.025	.164	.084	.025	
9.0	.173	.083	.023	.170	.083	.023	.164	.081	.023	.159	.080	.023	.154	.078	.023	
10.0	.162	.078	.022	.160	.077	.022	.155	.076	.021	.150	.075	.021	.146	.073	.021	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.196	.196	.196	.168	.168	.168	.115	.115	.115	.066	.066	.066	.021	.021	.021	
1.0	.186	.162	.140	.159	.139	.121	.109	.096	.084	.063	.055	.049	.020	.018	.016	
2.0	.178	.138	.104	.152	.119	.090	.104	.082	.063	.060	.048	.037	.019	.015	.012	
3.0	.170	.120	.081	.146	.104	.070	.100	.072	.049	.058	.042	.029	.019	.014	.009	
4.0	.162	.107	.065	.139	.092	.056	.096	.064	.040	.055	.038	.023	.018	.012	.008	
5.0	.155	.096	.054	.133	.083	.047	.091	.058	.033	.053	.034	.019	.017	.011	.006	
6.0	.148	.088	.045	.127	.076	.040	.087	.053	.028	.051	.031	.017	.016	.010	.005	
7.0	.141	.081	.039	.121	.070	.034	.084	.049	.024	.049	.029	.015	.016	.010	.005	
8.0	.134	.075	.035	.116	.065	.030	.080	.046	.022	.047	.027	.013	.015	.009	.004	
9.0	.128	.070	.031	.111	.061	.027	.077	.043	.019	.045	.025	.012	.014	.008	.004	
10.0	.123	.066	.029	.106	.057	.025	.073	.040	.018	.043	.024	.011	.014	.008	.004	

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-02-18

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:12.800m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:231.07V I:0.0436A P:9.0570W PF:0.8993 Freq:50.00Hz Lamp Flux:1227.16x1 lm										
NAME: 0017440215					TYPE:			WEIGHT:		
SPEC.:9W 3000K 1050lm					DIM.:			SERIAL No.:		
MFR.: LIT by CARDI					SUR.:0.04985046			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	19.7	21.2	20.0	21.4	21.7	19.5	21.0	19.8	21.2	21.5
3H	21.2	22.6	21.5	22.8	23.1	20.9	22.3	21.2	22.6	22.8
4H	21.8	23.1	22.1	23.4	23.7	21.5	22.8	21.8	23.1	23.3
6H	22.3	23.5	22.6	23.8	24.1	21.9	23.1	22.2	23.4	23.7
8H	22.4	23.6	22.8	23.9	24.2	22.0	23.2	22.3	23.5	23.8
12H	22.5	23.7	22.9	24.0	24.3	22.1	23.2	22.4	23.5	23.8
4H 2H	20.3	21.6	20.6	21.8	22.1	20.1	21.4	20.4	21.7	22.0
3H	21.9	23.1	22.3	23.4	23.7	21.7	22.8	22.1	23.2	23.5
4H	22.7	23.7	23.0	24.0	24.4	22.4	23.4	22.7	23.7	24.1
6H	23.2	24.2	23.7	24.5	24.9	22.9	23.8	23.3	24.2	24.5
8H	23.5	24.3	23.9	24.7	25.1	23.0	23.9	23.4	24.3	24.7
12H	23.6	24.4	24.1	24.8	25.2	23.1	23.9	23.6	24.3	24.7
8H 4H	22.9	23.8	23.3	24.1	24.5	22.6	23.5	23.0	23.9	24.3
6H	23.6	24.3	24.1	24.8	25.2	23.2	24.0	23.7	24.4	24.8
8H	23.9	24.5	24.4	25.0	25.5	23.5	24.1	24.0	24.6	25.0
12H	24.1	24.7	24.6	25.2	25.6	23.6	24.2	24.1	24.7	25.1
12H 4H	22.9	23.7	23.3	24.1	24.5	22.6	23.4	23.1	23.8	24.2
6H	23.7	24.3	24.1	24.7	25.2	23.3	23.9	23.8	24.4	24.9
8H	24.0	24.5	24.5	25.0	25.5	23.6	24.1	24.1	24.6	25.1
Variations with the observer position at spacings:										
S = 1.0H	+ 0.2 / - 0.2					+ 0.2 / - 0.2				
1.5H	+ 0.1 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.2				

CIE Pub.117, 1227 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 0.7)
Area: 0.0498505 m2

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-02-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:12.800m [K=1.0000]
Remarks:


```

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:12.800m [K=1.0000]
Remarks:

```

ISOCANDELA DIAGRAM

Test:U:231.07V I:0.0436A P:9.0570W PF:0.8993 Freq:50.00Hz Lamp Flux:1227.16x1 lm		
NAME: 0017440215	TYPE:	WEIGHT:
SPEC.:9W 3000K 1050lm	DIM.:	SERIAL No.:
MFR.: LIT by CARDI	SUR.:0.04985046	Shielding Angle:

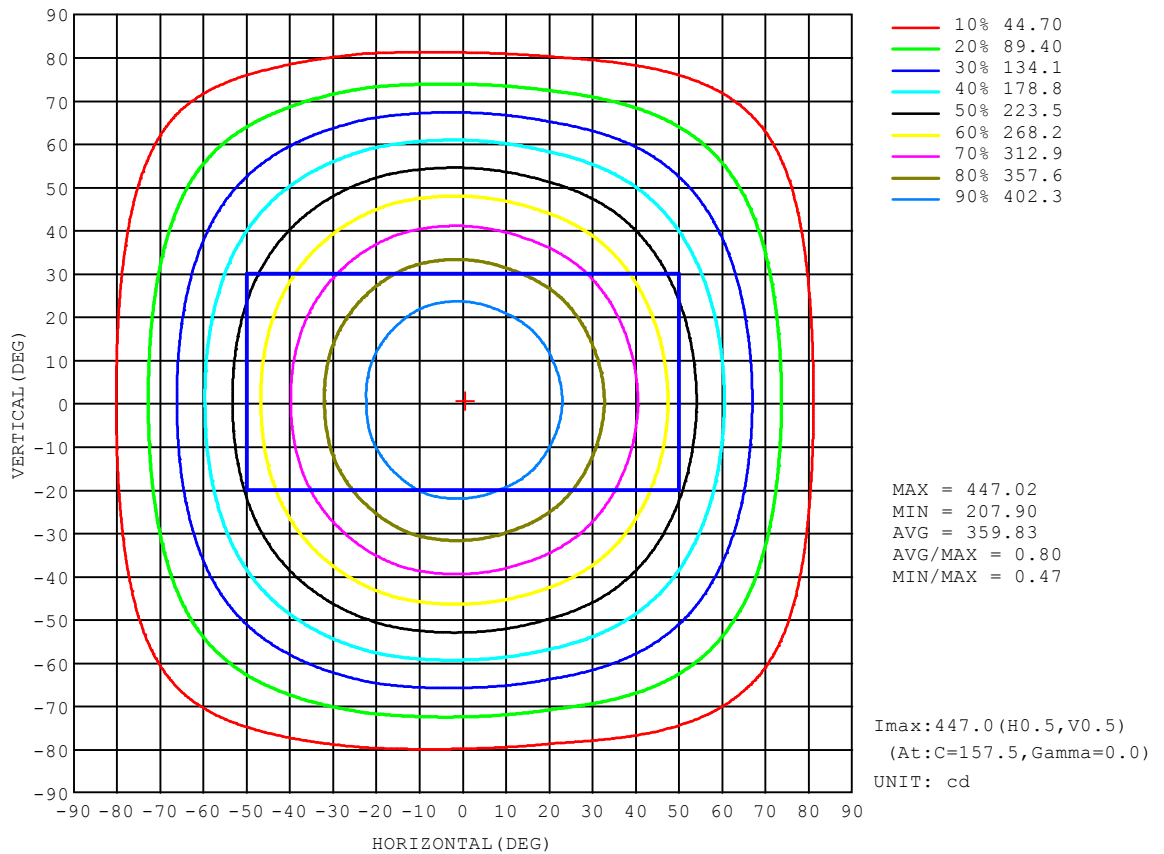


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2025-02-18

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:12.800m [K=1.0000]
 Remarks:

AAI Figure

Test:U:231.07V I:0.0436A P:9.0570W PF:0.8993 Freq:50.00Hz Lamp Flux:1227.16x1 lm		
NAME: 0017440215	TYPE:	WEIGHT:
SPEC.:9W 3000K 1050lm	DIM.:	SERIAL No.:
MFR.: LIT by CARDI	SUR.:0.04985046	Shielding Angle:

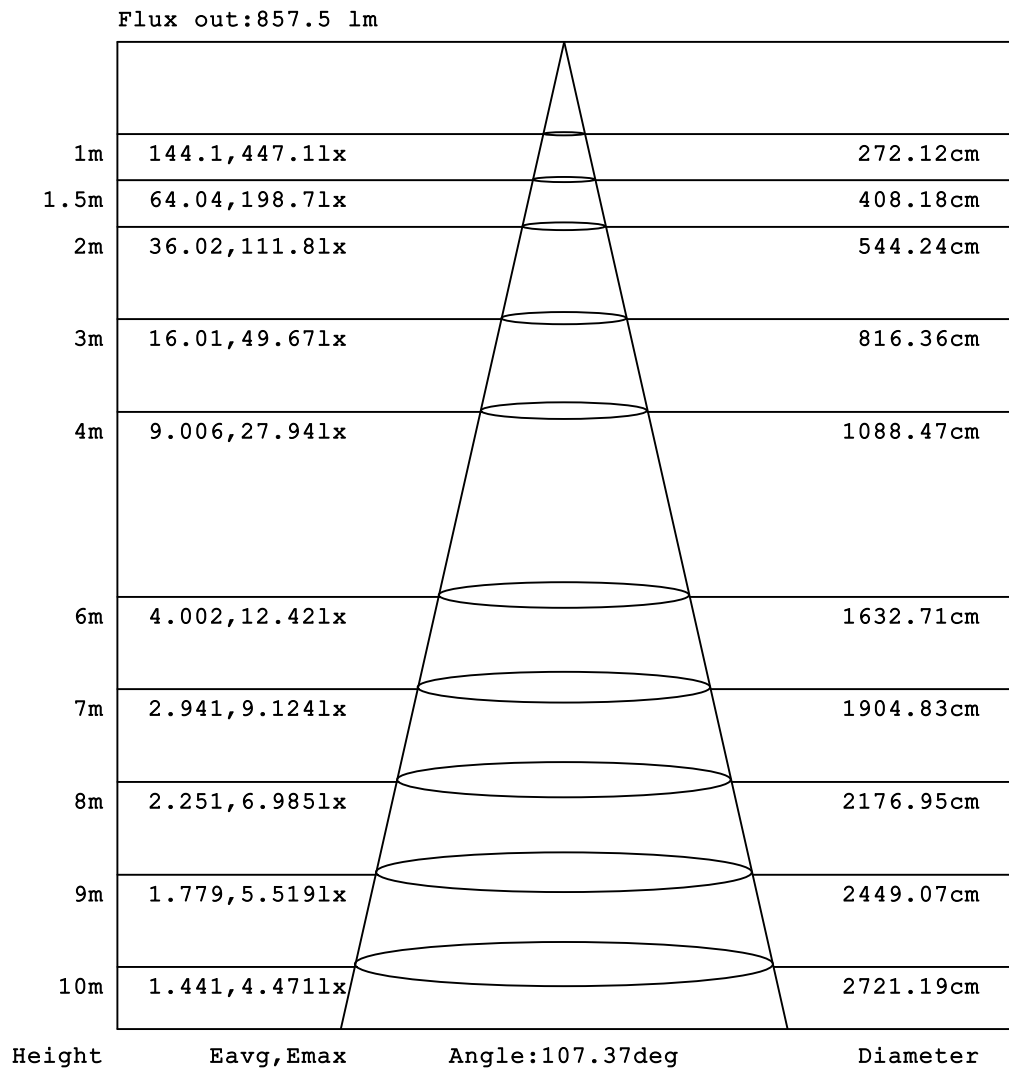


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-02-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:12.800m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:231.07V I:0.0436A P:9.0570W PF:0.8993 Freq:50.00Hz Lamp Flux:1227.16x1 lm		
NAME: 0017440215	TYPE:	WEIGHT:
SPEC.:9W 3000K 1050lm	DIM.:	SERIAL No.:
MFR.: LIT by CARDI	SUR.:0.04985046	Shielding Angle:

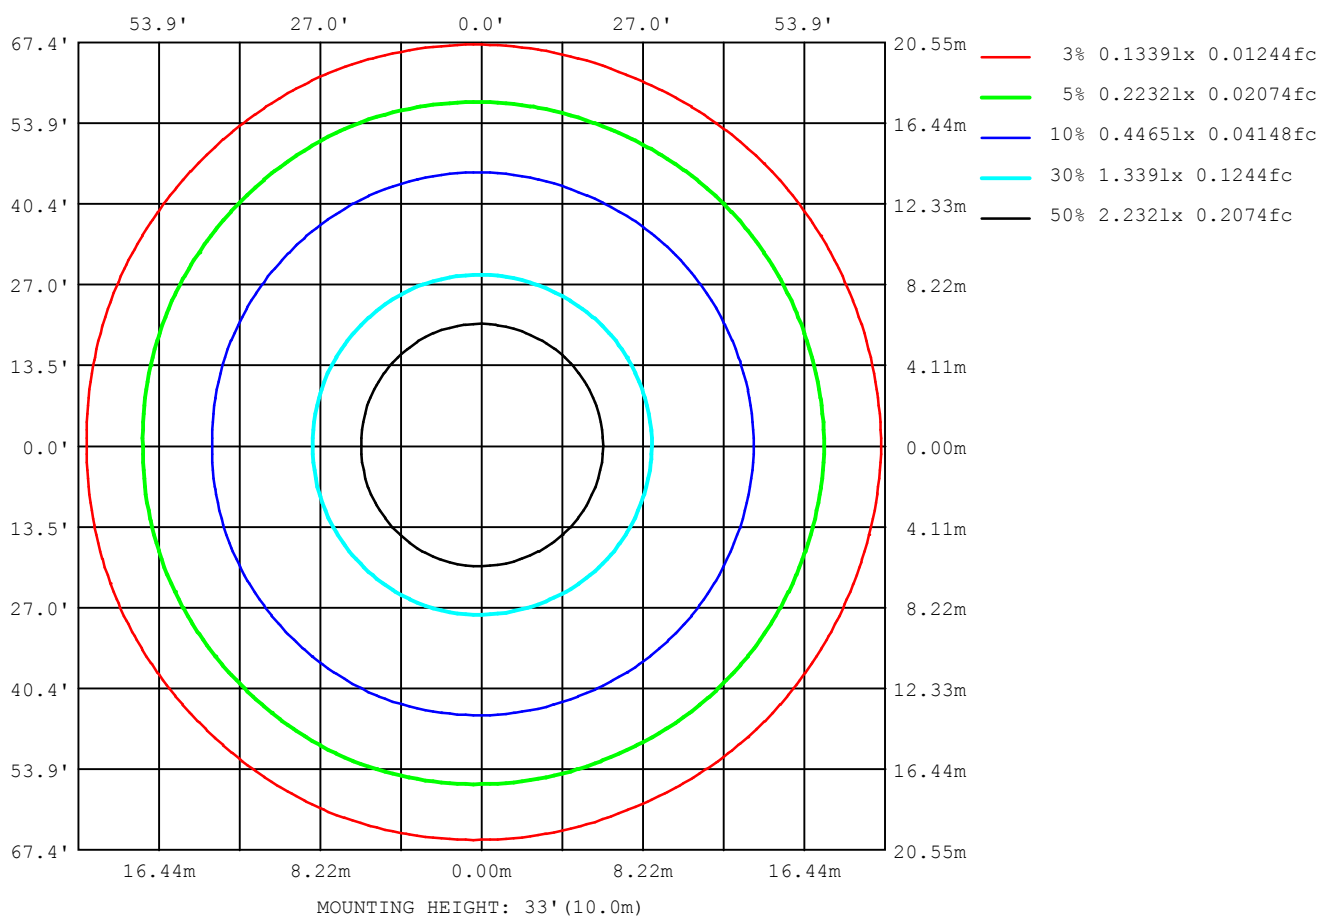

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-02-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:12.800m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:231.07V I:0.0436A P:9.0570W PF:0.8993 Freq:50.00Hz Lamp Flux:1227.16x1 lm		
NAME: 0017440215	TYPE:	WEIGHT:
SPEC.:9W 3000K 1050lm	DIM.:	SERIAL No.:
MFR.: LIT by CARDI	SUR.:0.04985046	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	6867
L_0~180 (75) av	6060
L_0~180 (85) av	4893
L_90~270 (65) av	6868
L_90~270 (75) av	6022
L_90~270 (85) av	4767
L_45 (65) av	6872
L_45 (75) av	6043
L_45 (85) av	4822

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-02-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:12.800m [K=1.0000]
Remarks:

Planar Illuminance Curve

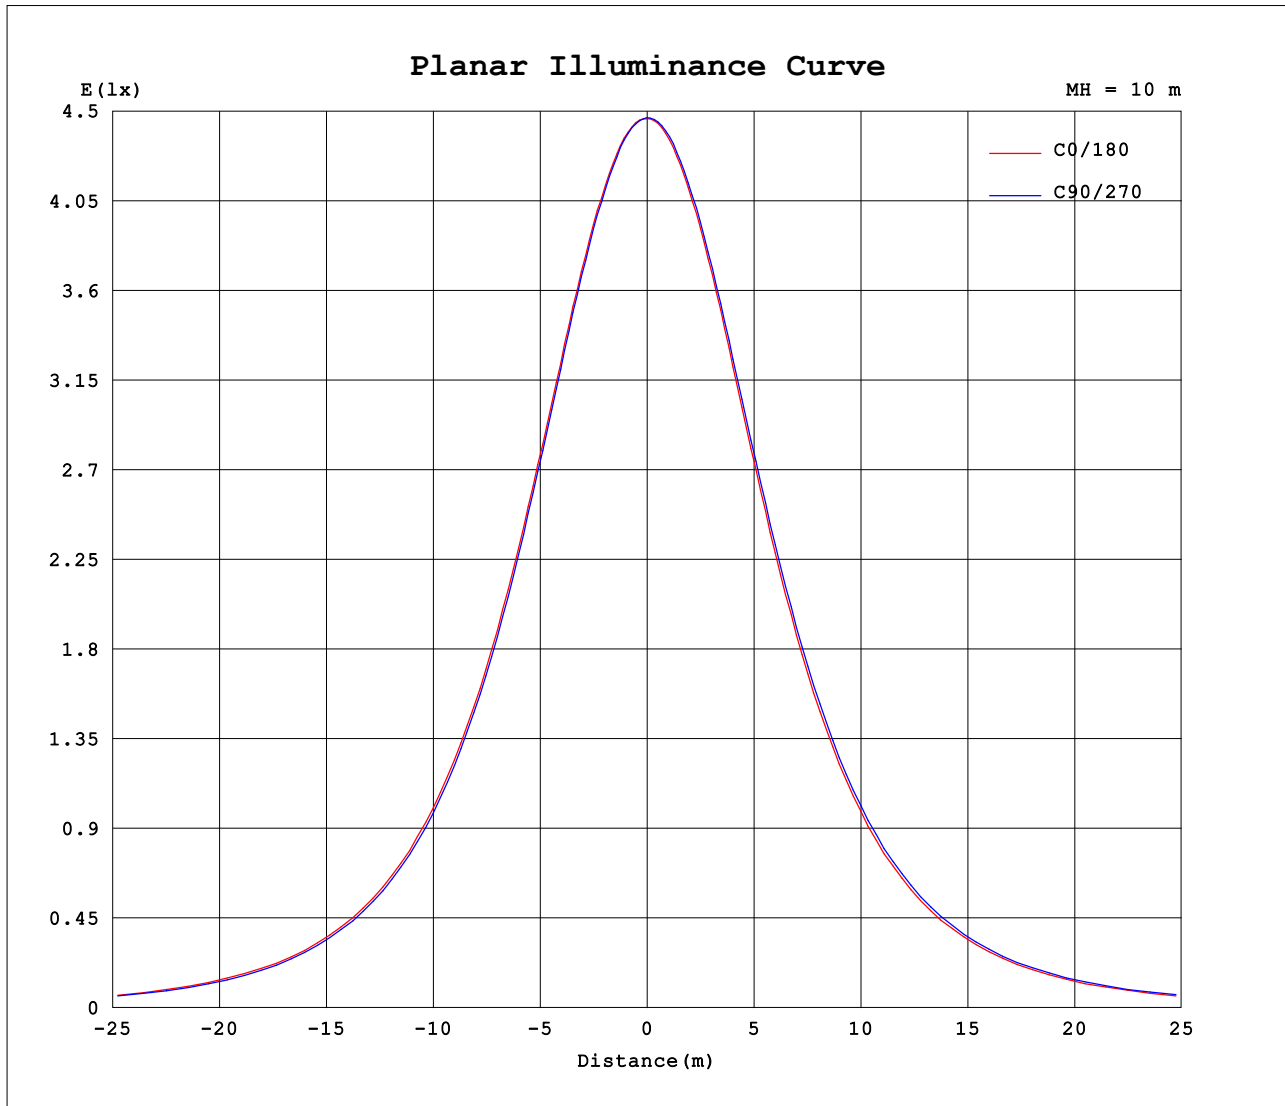

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2025-02-18

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.421
 Humidity: 65.0%
 Test Distance: 12.800m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:231.07V I:0.0436A P:9.0570W PF:0.8993 Freq:50.00Hz Lamp Flux:1227.16x1 lm		
NAME: 0017440215	TYPE:	WEIGHT:
SPEC.:9W 3000K 1050lm	DIM.:	SERIAL No.:
MFR.: LIT by CARDI	SUR.:0.04985046	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	446	446	447	447	447	447	447	447	446	446	447	447	447	447	447	447			
5	445	444	444	444	444	445	445	445	444	445	445	446	445	445	445	445			
10	439	437	437	436	437	438	438	438	437	439	439	440	440	439	439	439			
15	428	426	426	424	425	427	426	427	426	428	429	430	430	428	428	428			
20	413	411	410	408	410	412	411	412	411	413	414	416	415	413	414	413			
25	394	392	390	388	390	392	391	392	391	394	396	398	397	394	395	394			
30	372	368	367	365	366	369	368	369	368	371	373	376	374	371	372	371			
35	345	342	340	338	339	342	341	342	341	345	347	350	348	345	346	345			
40	316	312	311	308	309	313	311	312	311	316	318	322	319	315	316	315			
45	285	280	279	275	278	281	279	280	279	284	287	290	288	284	285	284			
50	251	247	245	242	244	248	246	247	246	251	253	257	254	250	252	250			
55	217	213	211	207	209	213	211	213	211	216	219	223	220	216	217	216			
60	182	178	176	172	174	178	176	178	176	181	184	187	185	181	182	181			
65	148	143	141	137	140	143	142	143	142	146	149	152	150	146	148	147			
70	114	109	107	103	106	110	108	109	108	112	114	118	115	112	114	113			
75	81.2	76.1	74.6	70.6	73.6	76.6	76.1	76.5	75.1	79.8	80.7	84.7	81.8	79.2	80.4	80.3			
80	51.1	46.2	44.8	41.3	44.0	46.9	46.5	46.9	45.5	49.7	50.5	53.9	51.2	49.0	50.2	50.2			
85	23.6	19.4	18.2	15.2	17.7	20.1	19.7	20.0	18.9	22.5	23.2	26.1	23.8	21.7	22.8	22.7			
90	0.77	0.65	0.67	0.68	0.67	0.66	0.67	0.66	0.21	0.33	0.51	2.54	0.74	0.26	0.27	0.28			
95	0.79	0.81	0.83	0.85	0.83	0.82	0.82	0.82	0.28	0.27	0.26	0.25	0.26	0.27	0.26	0.27			
100	0.97	1.00	1.01	1.04	1.03	1.01	1.02	1.01	0.38	0.36	0.35	0.34	0.34	0.36	0.36	0.36			
105	1.18	1.21	1.22	1.25	1.23	1.22	1.22	1.21	0.49	0.47	0.46	0.45	0.45	0.47	0.46	0.47			
110	1.39	1.43	1.44	1.47	1.45	1.43	1.43	1.43	0.62	0.60	0.59	0.57	0.58	0.60	0.59	0.59			
115	1.60	1.64	1.64	1.68	1.66	1.64	1.64	1.64	0.77	0.74	0.73	0.71	0.72	0.74	0.73	0.74			
120	1.82	1.85	1.86	1.88	1.87	1.85	1.85	1.85	0.94	0.90	0.89	0.86	0.88	0.89	0.89	0.89			
125	2.02	2.05	2.06	2.09	2.08	2.05	2.06	2.05	1.12	1.07	1.06	1.04	1.05	1.07	1.06	1.07			
130	2.22	2.25	2.26	2.29	2.27	2.25	2.25	2.25	1.31	1.27	1.25	1.22	1.24	1.27	1.26	1.26			
135	2.41	2.43	2.44	2.46	2.45	2.43	2.43	2.43	1.52	1.47	1.45	1.42	1.44	1.46	1.46	1.46			
140	2.56	2.59	2.60	2.62	2.61	2.59	2.59	2.59	1.71	1.67	1.66	1.64	1.65	1.68	1.66	1.67			
145	2.70	2.73	2.74	2.76	2.75	2.73	2.73	2.72	1.92	1.88	1.86	1.84	1.85	1.88	1.87	1.88			
150	2.84	2.86	2.86	2.88	2.86	2.85	2.85	2.85	2.15	2.11	2.09	2.06	2.07	2.10	2.10	2.11			
155	2.94	2.95	2.95	2.96	2.95	2.94	2.94	2.94	2.40	2.35	2.33	2.31	2.31	2.34	2.33	2.35			
160	3.04	3.05	3.04	3.05	3.03	3.03	3.04	3.03	2.61	2.56	2.54	2.51	2.52	2.55	2.54	2.55			
165	3.11	3.12	3.11	3.10	3.09	3.08	3.10	3.10	2.77	2.74	2.71	2.68	2.69	2.71	2.72	2.72			
170	3.17	3.17	3.15	3.14	3.13	3.14	3.15	3.16	2.93	2.90	2.88	2.85	2.84	2.88	2.88	2.89			
175	3.19	3.18	3.17	3.15	3.15	3.15	3.16	3.17	3.06	3.04	3.02	3.00	3.01	3.02	3.02	3.04			
180	3.15	3.14	3.13	3.11	3.12	3.12	3.13	3.13	3.16	3.14	3.13	3.11	3.11	3.12	3.12	3.13			

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-02-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:12.800m [K=1.0000]
Remarks: