


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:231.05V I:0.0854A P:18.699W PF:0.9472 Freq:50.00Hz Lamp Flux:2369.58x1 lm		
NAME: 0017440215	TYPE:	WEIGHT:
SPEC.:18.5W 3000K 2100lm	DIM.:	SERIAL No.:
MFR.: LIT by CARDI	SUR.:0.04985046	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 126.72 lm/W			
MODEL	3000K	I _{max} (cd)	864.1	S/MH(C0/180)	1.23
NOMINAL POWER(W)	18.5	LOR(%)	100.0	S/MH(C90/270)	1.25
RATED VOLTAGE(V)	230	TOTAL FLUX(lm)	2369.6	η UP,DN(C0-180)	0.5,49.0
NOMINAL FLUX(lm)	2369.58	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.3,50.3
LAMPS INSIDE	1	η up(%)	0.7	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	230	η down(%)	99.3	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

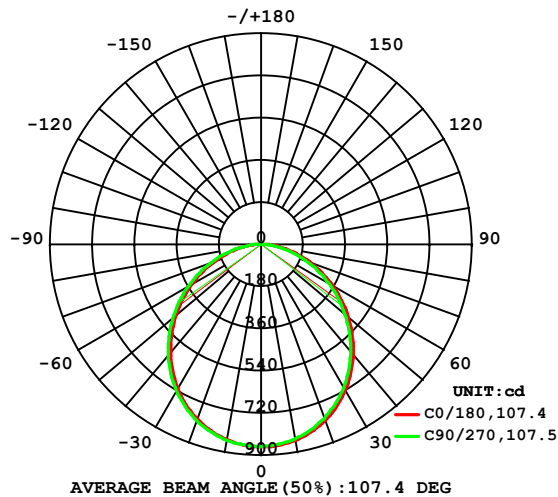

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

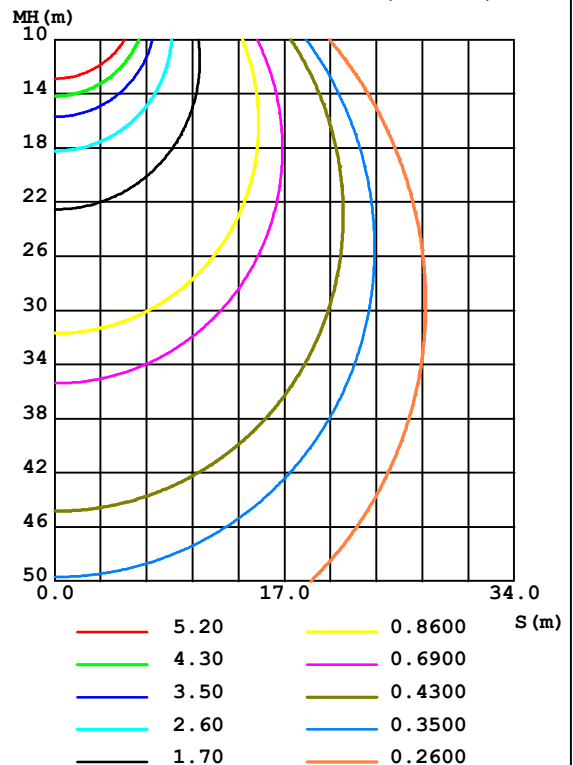

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-02-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:12.800m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	848.7	843.7	842.2	842.9	846.0	848.3	848.3	846.4	0- 10	81.51	81.51	3.44,3.44
20	800.2	791.7	789.5	791.2	794.6	801.0	802.0	798.2	10- 20	232.6	314.2	13.3,13.3
30	719.5	708.6	705.6	708.1	711.2	721.4	723.1	718.3	20- 30	349.5	663.6	28,28
40	612.3	599.4	595.7	598.8	601.6	615.0	617.4	611.6	30- 40	414.6	1078	45.5,45.5
50	487.0	473.2	469.1	472.6	474.9	489.9	492.6	486.8	40- 50	420.4	1499	63.2,63.2
60	353.4	338.8	334.6	338.6	340.6	355.7	358.9	353.3	50- 60	370.2	1869	78.9,78.9
70	220.6	206.0	202.2	207.1	208.3	221.6	224.7	220.9	60- 70	276.8	2146	90.5,90.5
80	99.26	85.81	83.23	88.29	87.58	98.87	101.4	99.07	70- 80	160.4	2306	97.3,97.3
90	1.498	1.280	1.296	1.283	0.3921	1.091	2.406	0.5883	80- 90	45.92	2352	99.3,99.3
100	1.869	1.948	1.973	1.945	0.6996	0.6422	0.6254	0.6422	90-100	1.164	2353	99.3,99.3
110	2.667	2.749	2.780	2.742	1.151	1.070	1.051	1.073	100-110	1.685	2355	99.4,99.4
120	3.466	3.547	3.573	3.535	1.737	1.622	1.609	1.627	110-120	2.222	2357	99.5,99.5
130	4.227	4.292	4.319	4.273	2.452	2.322	2.303	2.331	120-130	2.638	2360	99.6,99.6
140	4.863	4.935	4.947	4.914	3.224	3.099	3.073	3.098	130-140	2.831	2362	99.7,99.7
150	5.400	5.449	5.452	5.424	4.056	3.918	3.892	3.925	140-150	2.722	2365	99.8,99.8
160	5.765	5.770	5.745	5.735	4.912	4.758	4.727	4.752	150-160	2.305	2367	99.9,99.9
170	6.008	5.968	5.924	5.944	5.504	5.397	5.348	5.384	160-170	1.550	2369	100,100
180	5.956	5.887	5.846	5.863	5.968	5.892	5.846	5.861	170-180	0.5508	2370	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-02-18

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:12.800m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:231.05V I:0.0854A P:18.699W PF:0.9472 Freq:50.00Hz Lamp Flux:2369.58x1 lm		
NAME: 0017440215	TYPE:	WEIGHT:
SPEC.:18.5W 3000K 2100lm	DIM.:	SERIAL No.:
MFR.: LIT by CARDI	SUR.:0.04985046	Shielding Angle:

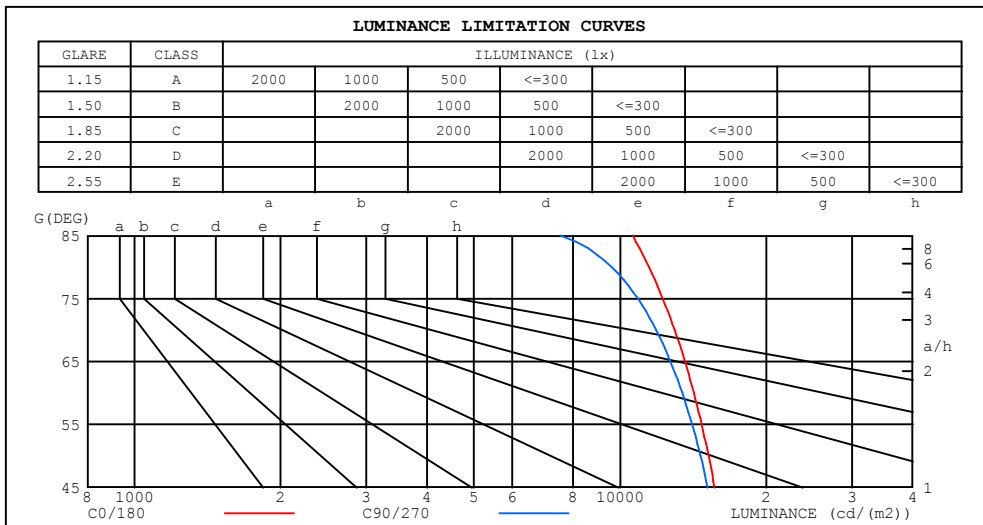

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	10635	7527
80	11466	9614
75	12238	10881
70	12938	11861
65	13591	12700
60	14180	13424
55	14716	14066
50	15198	14638
45	15638	15142


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-02-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:12.800m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:231.05V I:0.0854A P:18.699W PF:0.9472 Freq:50.00Hz Lamp Flux:2369.58x1 lm		
NAME: 0017440215	TYPE:	WEIGHT:
SPEC.:18.5W 3000K 2100lm	DIM.:	SERIAL No.:
MFR.: LIT by CARDI	SUR.:0.04985046	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

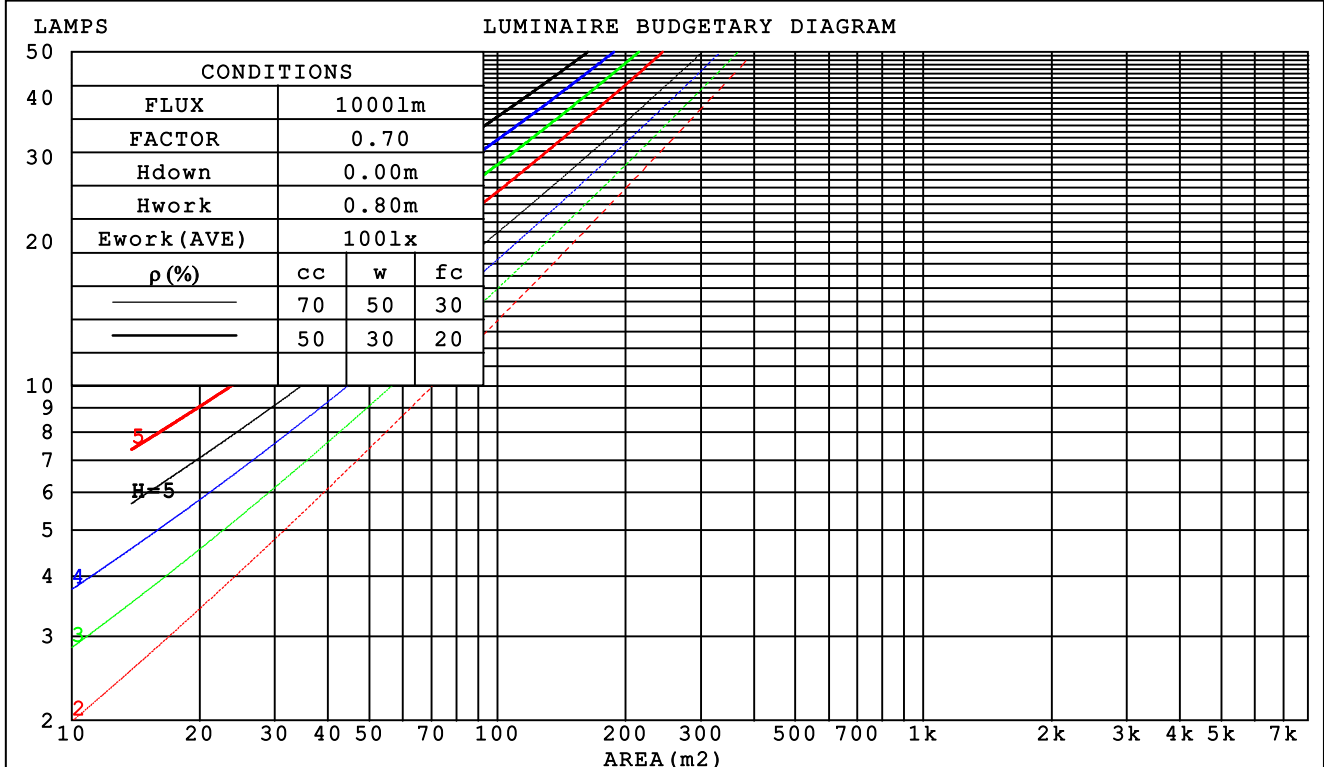

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2025-02-18

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.421
 Humidity: 65.0%
 Test Distance: 12.800m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:231.05V I:0.0854A P:18.699W PF:0.9472 Freq:50.00Hz Lamp Flux:2369.58x1 lm					
NAME: 0017440215			TYPE:		WEIGHT:
SPEC.:18.5W 3000K 2100lm			DIM.:		SERIAL No.:
MFR.: LIT by CARDI			SUR.:0.04985046		Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)									
0.0																
1.0	.307	.174	.055	.299	.171	.054	.286	.164	.052	.273	.158	.051	.262	.152	.049	
2.0	.288	.158	.048	.282	.155	.048	.270	.150	.047	.259	.145	.045	.249	.141	.044	
3.0	.267	.142	.043	.261	.140	.042	.251	.136	.041	.241	.132	.040	.232	.128	.040	
4.0	.246	.128	.038	.241	.126	.037	.232	.123	.037	.223	.120	.036	.215	.117	.036	
5.0	.228	.116	.034	.224	.115	.033	.215	.112	.033	.207	.109	.033	.200	.107	.032	
6.0	.212	.106	.030	.208	.105	.030	.200	.103	.030	.193	.100	.029	.186	.098	.029	
7.0	.197	.097	.028	.193	.096	.027	.187	.094	.027	.180	.093	.027	.175	.091	.027	
8.0	.184	.090	.025	.181	.089	.025	.175	.087	.025	.169	.086	.025	.164	.084	.025	
9.0	.173	.084	.023	.170	.083	.023	.164	.081	.023	.159	.080	.023	.154	.078	.023	
10.0	.162	.078	.022	.160	.077	.022	.155	.076	.021	.150	.075	.021	.146	.073	.021	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.196	.196	.196	.168	.168	.168	.114	.114	.114	.066	.066	.066	.021	.021	.021	
1.0	.186	.162	.140	.159	.139	.121	.109	.096	.084	.063	.055	.049	.020	.018	.016	
2.0	.178	.138	.104	.152	.119	.090	.104	.082	.063	.060	.048	.037	.019	.015	.012	
3.0	.170	.120	.081	.145	.104	.070	.100	.072	.049	.058	.042	.029	.019	.014	.009	
4.0	.162	.107	.065	.139	.092	.056	.096	.064	.039	.055	.038	.023	.018	.012	.008	
5.0	.155	.096	.053	.133	.083	.046	.091	.058	.033	.053	.034	.019	.017	.011	.006	
6.0	.147	.088	.045	.127	.076	.039	.087	.053	.028	.051	.031	.017	.016	.010	.005	
7.0	.141	.081	.039	.121	.070	.034	.084	.049	.024	.049	.029	.014	.016	.010	.005	
8.0	.134	.075	.035	.116	.065	.030	.080	.046	.022	.047	.027	.013	.015	.009	.004	
9.0	.128	.070	.031	.110	.061	.027	.076	.043	.019	.045	.025	.012	.014	.008	.004	
10.0	.123	.066	.028	.106	.057	.025	.073	.040	.018	.043	.024	.011	.014	.008	.003	

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-02-18

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:12.800m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:231.05V I:0.0854A P:18.699W PF:0.9472 Freq:50.00Hz Lamp Flux:2369.58x1 lm										
NAME: 0017440215					TYPE:			WEIGHT:		
SPEC.:18.5W 3000K 2100lm					DIM.:			SERIAL No.:		
MFR.: LIT by CARDI					SUR.:0.04985046			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	22.0	23.5	22.3	23.7	24.0	21.8	23.3	22.1	23.5	23.7
3H	23.5	24.9	23.8	25.1	25.4	23.2	24.6	23.5	24.8	25.1
4H	24.1	25.4	24.5	25.7	26.0	23.7	25.0	24.1	25.3	25.6
6H	24.6	25.8	24.9	26.1	26.4	24.1	25.4	24.5	25.6	25.9
8H	24.8	26.0	25.1	26.3	26.6	24.2	25.4	24.6	25.7	26.0
12H	24.9	26.0	25.2	26.3	26.7	24.3	25.4	24.6	25.7	26.1
4H 2H	22.6	23.9	22.9	24.2	24.4	22.4	23.7	22.7	24.0	24.2
3H	24.2	25.4	24.6	25.7	26.0	23.9	25.1	24.3	25.4	25.7
4H	25.0	26.0	25.4	26.4	26.7	24.6	25.7	25.0	26.0	26.3
6H	25.6	26.5	26.0	26.9	27.3	25.1	26.0	25.5	26.4	26.8
8H	25.8	26.7	26.2	27.0	27.4	25.3	26.1	25.7	26.5	26.9
12H	26.0	26.8	26.4	27.2	27.6	25.4	26.2	25.8	26.6	27.0
8H 4H	25.2	26.1	25.6	26.5	26.9	24.9	25.7	25.3	26.1	26.5
6H	25.9	26.7	26.4	27.1	27.5	25.5	26.2	26.0	26.6	27.1
8H	26.2	26.9	26.7	27.3	27.8	25.7	26.4	26.2	26.8	27.3
12H	26.5	27.0	27.0	27.5	28.0	25.9	26.4	26.4	26.9	27.4
12H 4H	25.2	26.0	25.6	26.4	26.8	24.9	25.7	25.3	26.1	26.5
6H	26.0	26.6	26.5	27.1	27.5	25.6	26.2	26.0	26.6	27.1
8H	26.3	26.9	26.8	27.3	27.8	25.8	26.4	26.3	26.8	27.3
Variations with the observer position at spacings:										
S = 1.0H	+ 0.2 / - 0.2					+ 0.2 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.2				

CIE Pub.117, 2370 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 3.0)
Area: 0.0498505 m2

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-02-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:12.800m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:231.05V I:0.0854A P:18.699W PF:0.9472 Freq:50.00Hz Lamp Flux:2369.58x1 lm		
NAME: 0017440215	TYPE:	WEIGHT:
SPEC.:18.5W 3000K 2100lm	DIM.:	SERIAL No.:
MFR.: LIT by CARDI	SUR.:0.04985046	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	58	47	40	57	46	40	56	46	39	33
0.80	68	57	49	67	56	49	65	55	49	42
1.00	76	65	58	75	65	58	73	66	57	50
1.25	83	73	66	82	72	66	79	71	65	57
1.50	88	79	72	87	78	71	84	76	70	62
2.00	95	87	80	93	85	79	90	83	78	70
2.50	99	91	85	97	90	84	93	87	82	74
3.00	102	95	90	100	94	89	96	91	87	78
4.00	106	101	96	104	99	94	99	95	92	83
5.00	109	104	100	106	102	98	101	98	95	86
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-02-18

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:12.800m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:231.05V I:0.0854A P:18.699W PF:0.9472 Freq:50.00Hz Lamp Flux:2369.58x1 lm		
NAME: 0017440215	TYPE:	WEIGHT:
SPEC.:18.5W 3000K 2100lm	DIM.:	SERIAL No.:
MFR.: LIT by CARDI	SUR.:0.04985046	Shielding Angle:

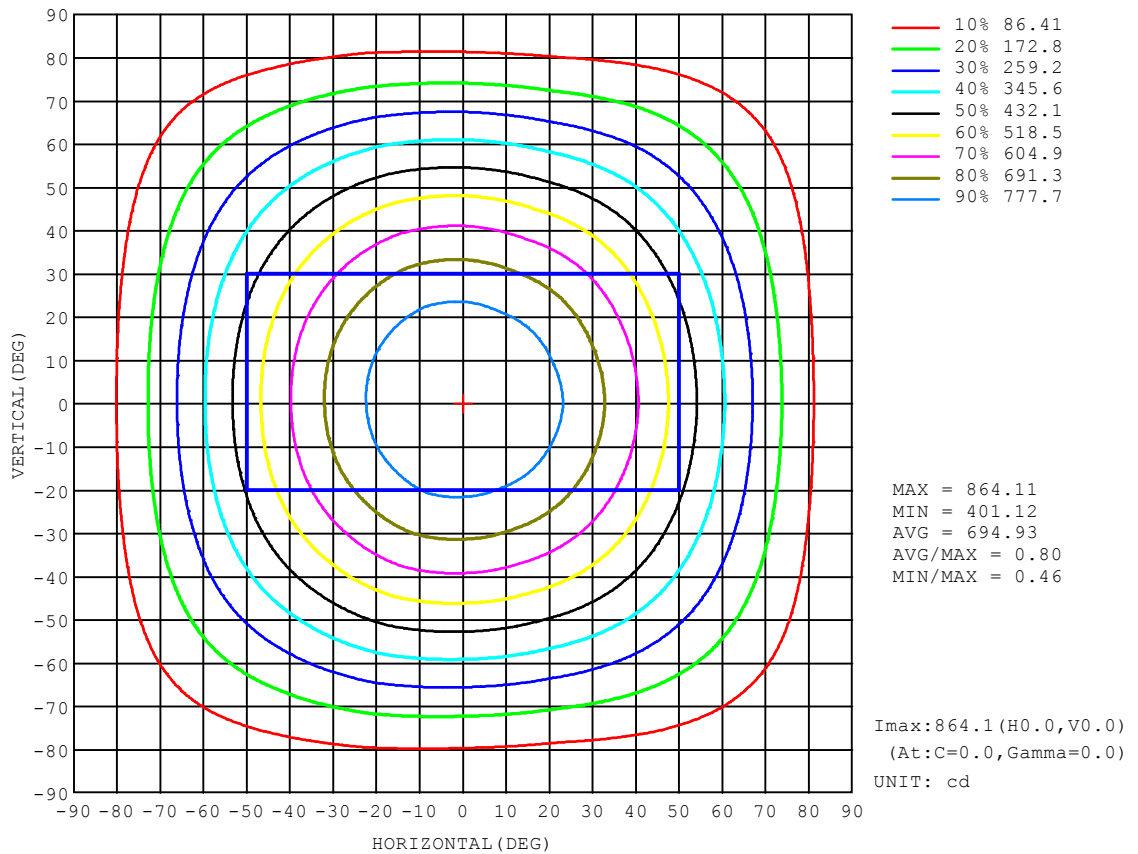


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-02-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:12.800m [K=1.0000]
Remarks:

AAI Figure

Test:U:231.05V I:0.0854A P:18.699W PF:0.9472 Freq:50.00Hz Lamp Flux:2369.58x1 lm		
NAME: 0017440215	TYPE:	WEIGHT:
SPEC.:18.5W 3000K 2100lm	DIM.:	SERIAL No.:
MFR.: LIT by CARDI	SUR.:0.04985046	Shielding Angle:

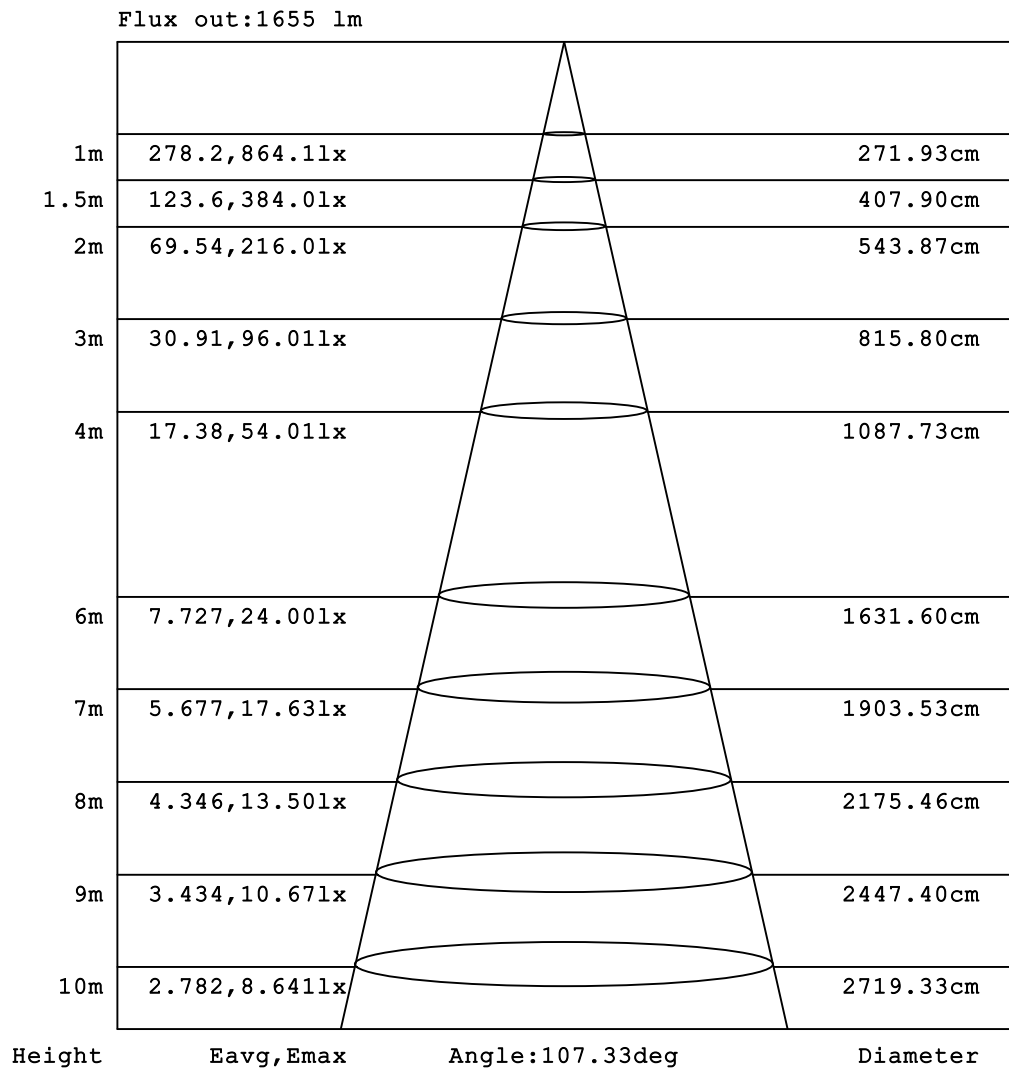


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-02-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:12.800m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:231.05V I:0.0854A P:18.699W PF:0.9472 Freq:50.00Hz Lamp Flux:2369.58x1 lm		
NAME: 0017440215	TYPE:	WEIGHT:
SPEC.:18.5W 3000K 2100lm	DIM.:	SERIAL No.:
MFR.: LIT by CARDI	SUR.:0.04985046	Shielding Angle:

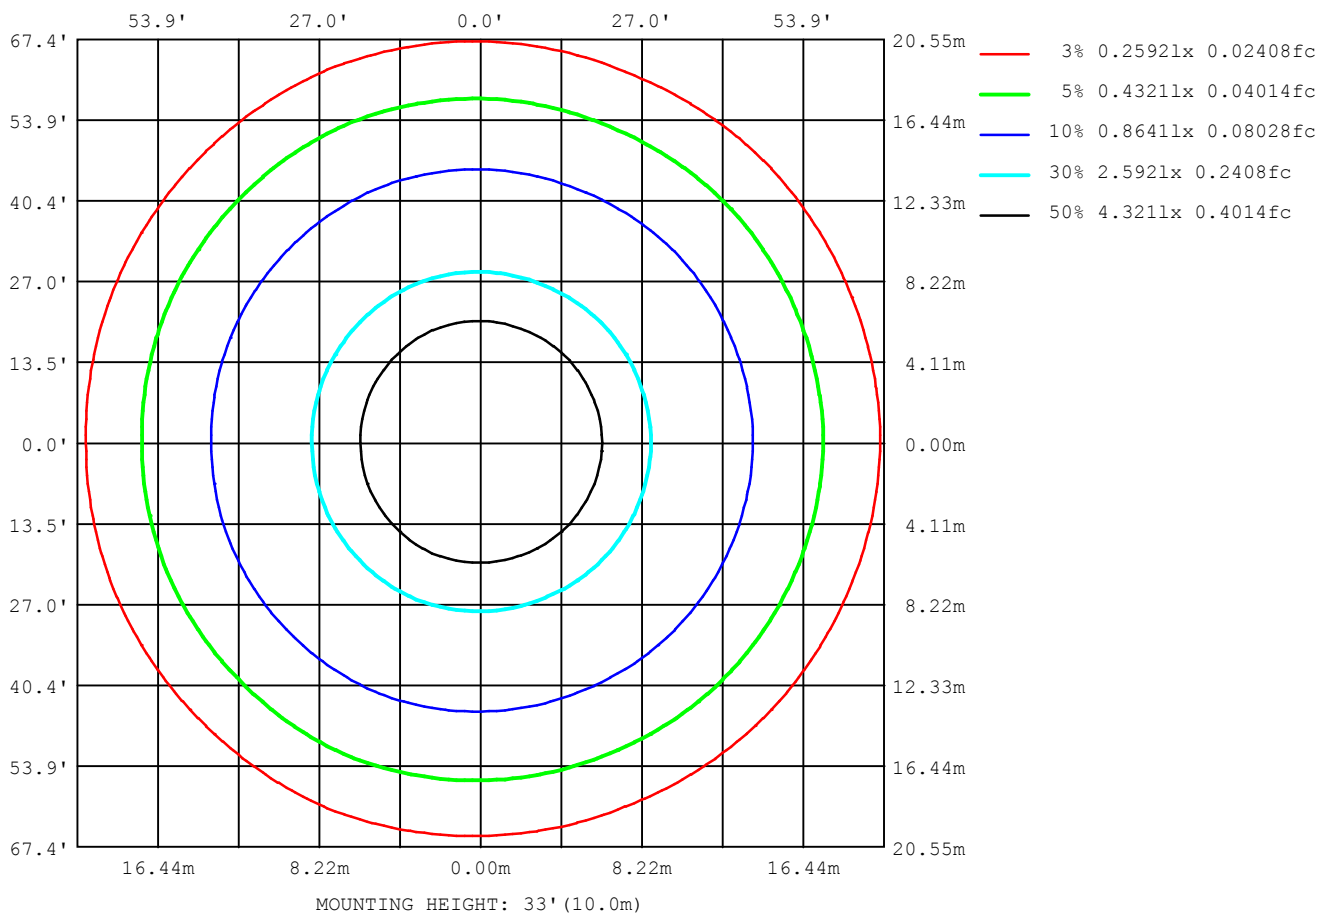

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-02-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:12.800m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:231.05V I:0.0854A P:18.699W PF:0.9472 Freq:50.00Hz Lamp Flux:2369.58x1 lm		
NAME: 0017440215	TYPE:	WEIGHT:
SPEC.:18.5W 3000K 2100lm	DIM.:	SERIAL No.:
MFR.: LIT by CARDI	SUR.:0.04985046	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	13288
L_0~180 (75) av	11791
L_0~180 (85) av	9479
L_90~270 (65) av	13258
L_90~270 (75) av	11686
L_90~270 (85) av	9225
L_45 (65) av	13267
L_45 (75) av	11729
L_45 (85) av	9323

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-02-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:12.800m [K=1.0000]
Remarks:

Planar Illuminance Curve

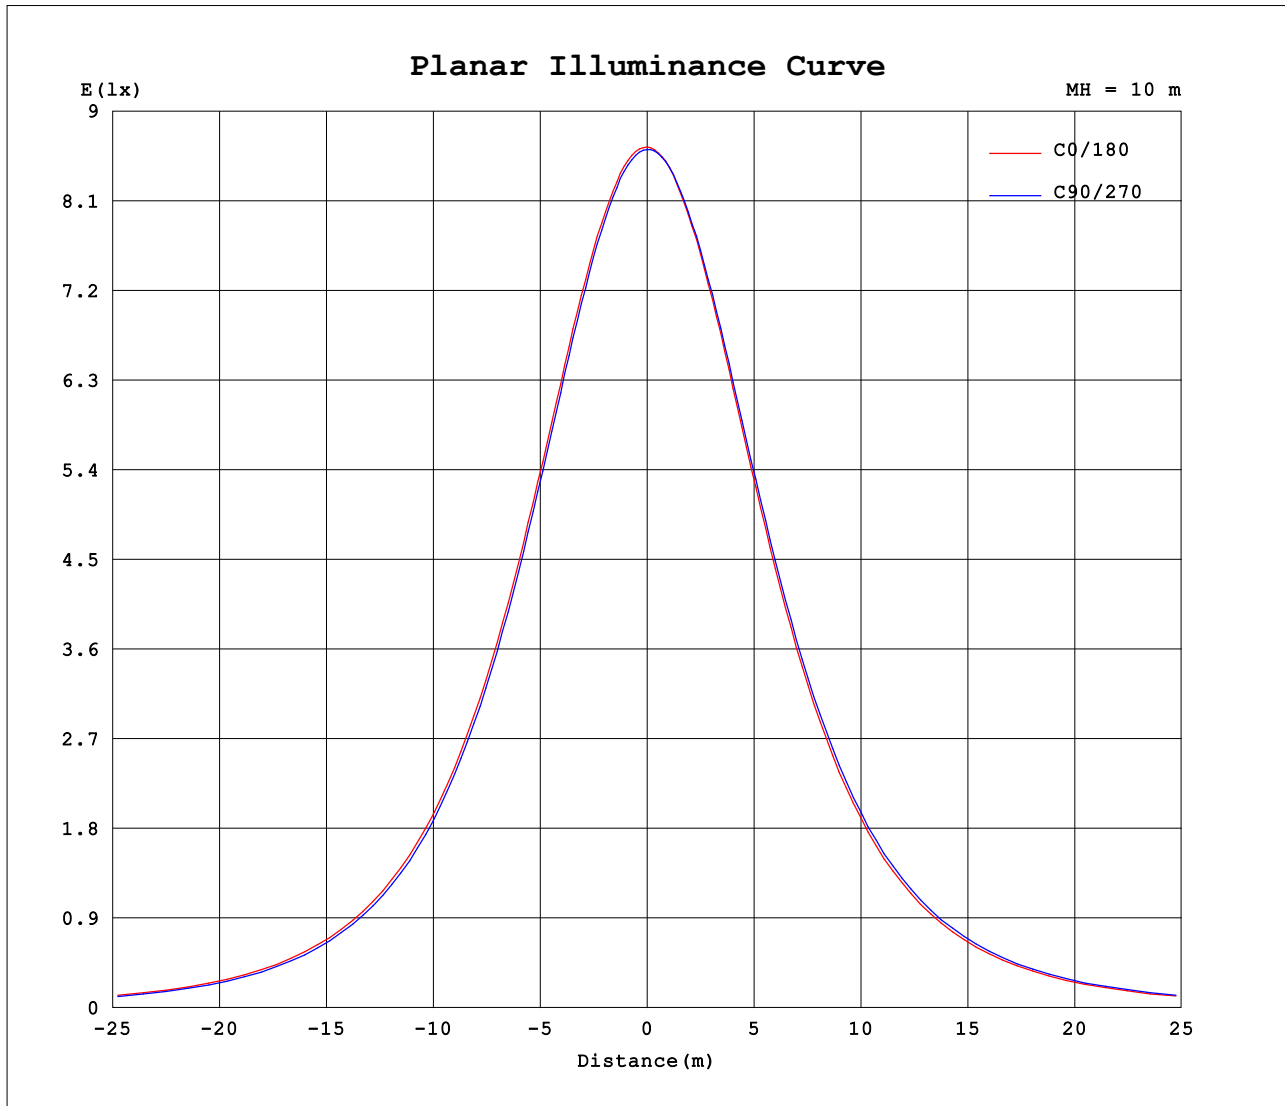

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2025-02-18

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.421
 Humidity: 65.0%
 Test Distance: 12.800m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:231.05V I:0.0854A P:18.699W PF:0.9472 Freq:50.00Hz Lamp Flux:2369.58x1 lm		
NAME: 0017440215	TYPE:	WEIGHT:
SPEC.:18.5W 3000K 2100lm	DIM.:	SERIAL No.:
MFR.: LIT by CARDI	SUR.:0.04985046	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	864	863	863	862	862	862	861	861	864	863	863	862	862	862	861	861			
5	861	859	857	856	856	857	856	856	860	859	859	860	859	858	858	858			
10	849	846	844	841	842	844	843	844	846	847	848	850	848	846	846	845			
15	829	824	822	818	820	823	821	822	824	827	828	831	829	825	827	825			
20	800	795	792	787	789	794	791	793	795	798	801	804	802	797	798	797			
25	763	758	754	749	751	756	754	755	757	761	765	769	766	760	762	760			
30	720	713	709	703	706	711	708	710	711	717	721	727	723	716	718	716			
35	669	662	657	650	653	660	656	659	659	666	671	677	673	665	668	666			
40	612	605	599	593	596	603	599	601	602	609	615	622	617	609	612	609			
45	551	543	538	531	534	542	537	540	540	548	554	561	557	548	551	548			
50	487	479	473	465	469	477	473	475	475	483	490	497	493	483	487	484			
55	421	412	407	399	402	410	406	409	408	417	423	431	426	417	421	418			
60	353	345	339	331	335	343	339	342	341	349	356	364	359	349	353	351			
65	286	278	272	264	268	276	272	275	274	282	288	296	291	282	286	284			
70	221	212	206	198	202	211	207	210	208	216	222	229	225	216	221	219			
75	158	150	144	136	140	149	146	148	146	153	158	165	161	153	158	156			
80	99.3	90.2	85.8	78.4	83.2	90.2	88.3	89.6	87.6	95.1	98.9	105	101	95.0	99.1	97.6			
85	46.2	38.3	34.6	28.2	32.7	38.5	36.8	37.9	36.2	42.8	45.4	51.8	47.5	42.5	45.2	44.6			
90	1.50	1.25	1.28	1.31	1.30	1.26	1.28	1.26	0.39	0.61	1.09	5.86	2.41	0.51	0.59	0.54			
95	1.51	1.56	1.59	1.63	1.61	1.57	1.58	1.58	0.52	0.49	0.47	0.45	0.46	0.48	0.47	0.48			
100	1.87	1.92	1.95	2.00	1.97	1.93	1.95	1.93	0.70	0.66	0.64	0.61	0.63	0.65	0.64	0.65			
105	2.26	2.31	2.35	2.40	2.37	2.33	2.34	2.33	0.91	0.86	0.84	0.81	0.82	0.85	0.84	0.85			
110	2.67	2.72	2.75	2.81	2.78	2.73	2.74	2.73	1.15	1.10	1.07	1.03	1.05	1.08	1.07	1.08			
115	3.07	3.12	3.15	3.21	3.18	3.13	3.14	3.13	1.42	1.36	1.33	1.29	1.31	1.34	1.34	1.34			
120	3.47	3.52	3.55	3.60	3.57	3.52	3.54	3.52	1.74	1.66	1.62	1.58	1.61	1.64	1.63	1.64			
125	3.86	3.90	3.93	3.99	3.96	3.91	3.92	3.90	2.08	1.99	1.96	1.90	1.95	1.98	1.96	1.97			
130	4.23	4.27	4.29	4.35	4.32	4.27	4.27	4.27	2.45	2.36	2.32	2.27	2.30	2.34	2.33	2.33			
135	4.56	4.60	4.63	4.67	4.65	4.60	4.61	4.60	2.84	2.75	2.71	2.64	2.68	2.72	2.71	2.71			
140	4.86	4.91	4.94	4.98	4.95	4.91	4.91	4.91	3.22	3.14	3.10	3.04	3.07	3.11	3.10	3.10			
145	5.14	5.19	5.20	5.24	5.21	5.18	5.18	5.17	3.62	3.54	3.49	3.43	3.47	3.50	3.49	3.50			
150	5.40	5.45	5.45	5.48	5.45	5.42	5.42	5.41	4.06	3.97	3.92	3.85	3.89	3.94	3.92	3.93			
155	5.61	5.64	5.63	5.65	5.63	5.60	5.60	5.59	4.53	4.43	4.39	4.32	4.34	4.38	4.37	4.38			
160	5.76	5.78	5.77	5.78	5.74	5.74	5.73	5.73	4.91	4.81	4.76	4.72	4.73	4.76	4.75	4.76			
165	5.93	5.93	5.92	5.91	5.88	5.87	5.89	5.89	5.23	5.16	5.11	5.05	5.06	5.10	5.10	5.10			
170	6.01	5.98	5.97	5.94	5.92	5.92	5.94	5.95	5.50	5.45	5.40	5.34	5.35	5.39	5.38	5.40			
175	6.02	5.99	5.97	5.94	5.92	5.93	5.94	5.95	5.76	5.72	5.67	5.62	5.63	5.66	5.66	5.67			
180	5.96	5.92	5.89	5.85	5.85	5.86	5.86	5.87	5.97	5.92	5.89	5.84	5.85	5.86	5.86	5.87			

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-02-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:12.800m [K=1.0000]
Remarks: