


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:231.05V I:0.0853A P:18.673W PF:0.9472 Freq:50.00Hz Lamp Flux:2406.74x1 lm		
NAME: 0017440215	TYPE:	WEIGHT:
SPEC.:18.5W 4000K 2100lm	DIM.:	SERIAL No.:
MFR.: LIT by CARDI	SUR.:0.04985046	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 128.89 lm/W			
MODEL	4000K	I _{max} (cd)	875.4	S/MH (C0/180)	1.23
NOMINAL POWER(W)	18.5	LOR(%)	100.0	S/MH (C90/270)	1.25
RATED VOLTAGE(V)	230	TOTAL FLUX(lm)	2406.7	η UP, DN (C0-180)	0.5, 48.8
NOMINAL FLUX(lm)	2406.74	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.3, 50.4
LAMPS INSIDE	1	η up (%)	0.8	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	230	η down (%)	99.2	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

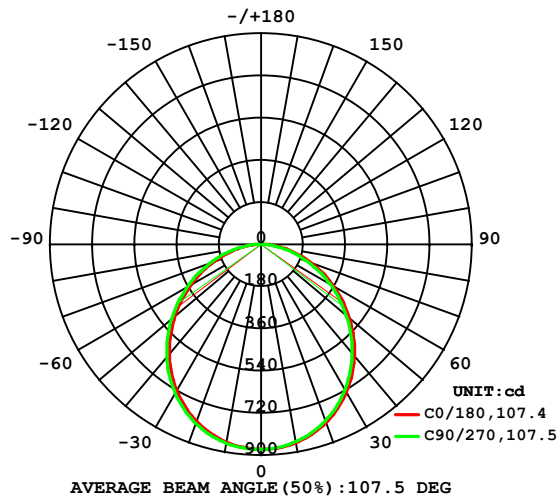

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

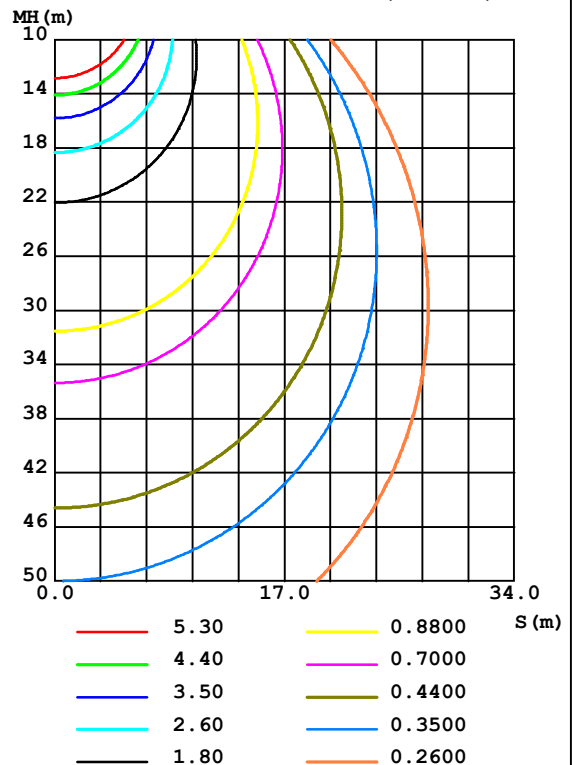

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2025-02-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity: 65.0%
Test Distance: 12.800m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	859.6	856.1	855.3	856.6	856.7	860.4	861.4	860.2	0- 10	82.73	82.73	3.44,3.44
20	810.3	803.4	801.8	804.1	804.9	812.5	814.1	811.1	10- 20	236.1	318.9	13.2,13.2
30	729.0	719.3	716.6	719.6	720.5	732.1	734.4	730.0	20- 30	354.7	673.6	28,28
40	620.5	608.6	605.3	608.6	609.6	624.3	627.0	621.8	30- 40	421.0	1095	45.5,45.5
50	493.8	480.6	476.7	480.3	481.2	497.4	500.4	494.8	40- 50	426.9	1521	63.2,63.2
60	358.4	344.3	340.2	344.2	345.4	361.2	364.5	359.3	50- 60	376.0	1897	78.8,78.8
70	223.7	209.3	205.7	210.6	211.3	225.2	228.3	224.5	60- 70	281.3	2179	90.5,90.5
80	100.6	87.20	84.69	89.81	88.89	100.5	103.0	100.8	70- 80	163.0	2342	97.3,97.3
90	1.546	1.310	1.326	1.317	0.3920	1.134	2.443	0.5789	80- 90	46.72	2388	99.2,99.2
100	1.913	2.007	2.037	2.001	0.7115	0.6555	0.6405	0.6557	90-100	1.206	2390	99.3,99.3
110	2.750	2.842	2.868	2.832	1.185	1.103	1.081	1.103	100-110	1.739	2391	99.4,99.4
120	3.586	3.672	3.706	3.658	1.793	1.681	1.665	1.676	110-120	2.298	2394	99.5,99.5
130	4.370	4.450	4.480	4.425	2.532	2.396	2.379	2.398	120-130	2.730	2396	99.6,99.6
140	5.026	5.111	5.125	5.083	3.330	3.200	3.177	3.205	130-140	2.928	2399	99.7,99.7
150	5.567	5.642	5.645	5.598	4.181	4.061	4.023	4.048	140-150	2.816	2402	99.8,99.8
160	5.957	5.976	5.952	5.937	5.078	4.924	4.896	4.925	150-160	2.378	2405	99.9,99.9
170	6.253	6.199	6.143	6.177	5.718	5.610	5.543	5.588	160-170	1.606	2406	100,100
180	6.150	6.068	6.024	6.049	6.159	6.069	6.022	6.052	170-180	0.5704	2407	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-02-18

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:12.800m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:231.05V I:0.0853A P:18.673W PF:0.9472 Freq:50.00Hz Lamp Flux:2406.74x1 lm		
NAME: 0017440215	TYPE:	WEIGHT:
SPEC.:18.5W 4000K 2100lm	DIM.:	SERIAL No.:
MFR.: LIT by CARDI	SUR.:0.04985046	Shielding Angle:

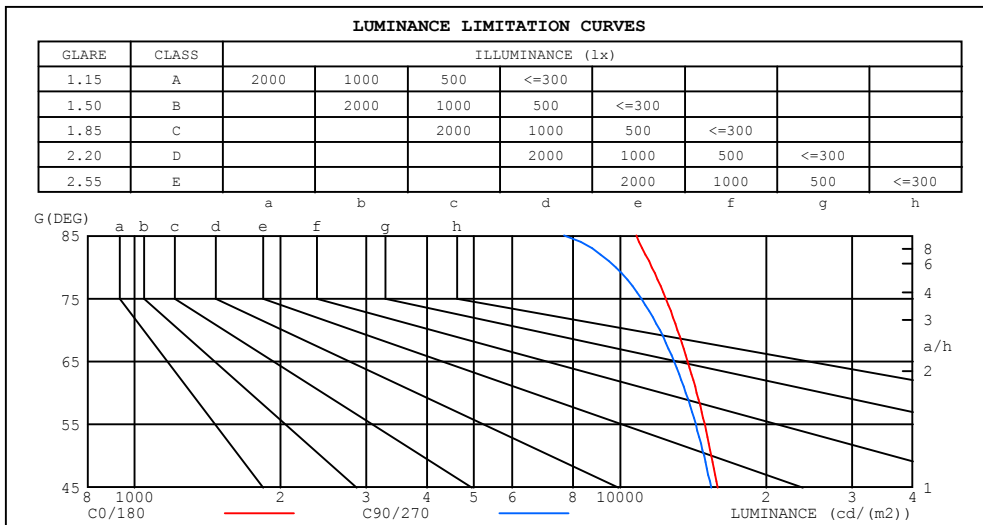

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	10790	7660
80	11622	9783
75	12415	11071
70	13121	12064
65	13778	12912
60	14377	13647
55	14919	14301
50	15410	14878
45	15855	15394


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-02-18

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:12.800m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:231.05V I:0.0853A P:18.673W PF:0.9472 Freq:50.00Hz Lamp Flux:2406.74x1 lm		
NAME: 0017440215	TYPE:	WEIGHT:
SPEC.:18.5W 4000K 2100lm	DIM.:	SERIAL No.:
MFR.: LIT by CARDI	SUR.:0.04985046	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

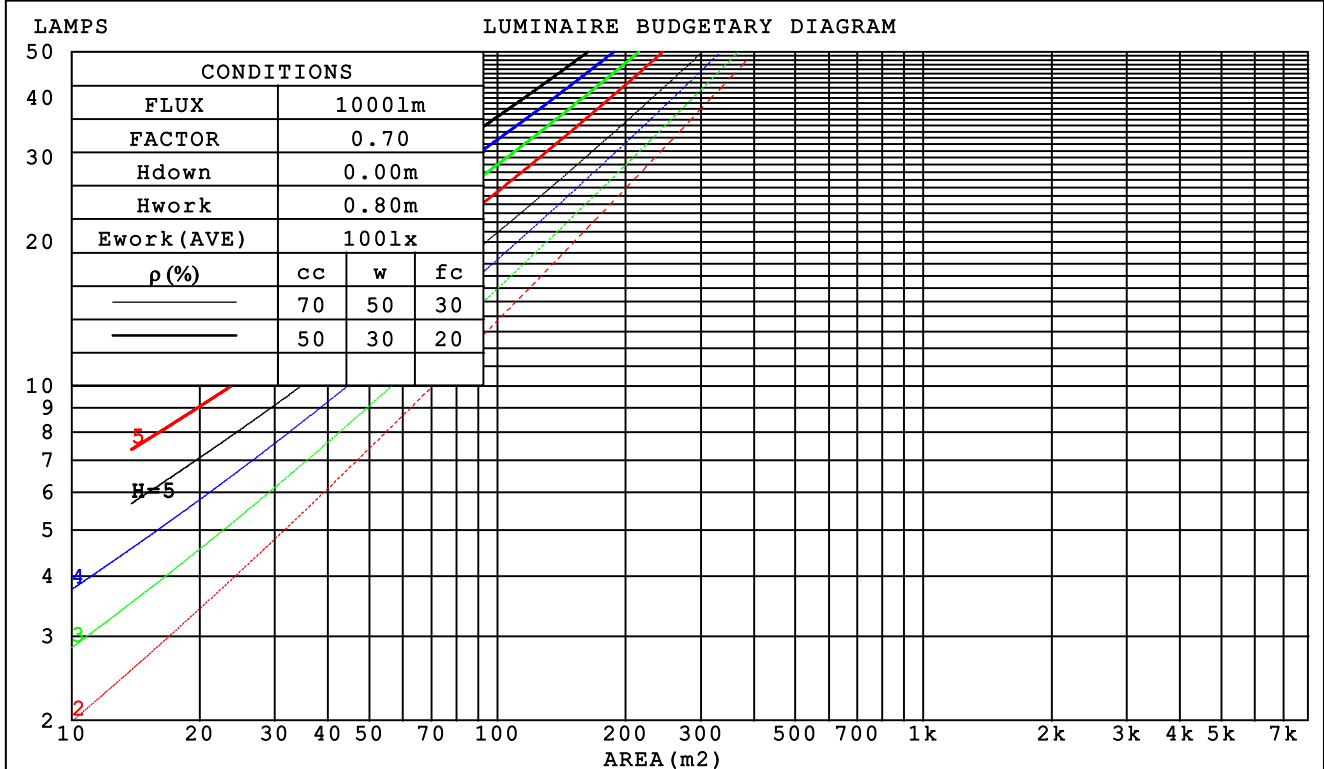

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-02-18

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:12.800m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:231.05V I:0.0853A P:18.673W PF:0.9472 Freq:50.00Hz Lamp Flux:2406.74x1 lm					
NAME: 0017440215			TYPE:		WEIGHT:
SPEC.:18.5W 4000K 2100lm			DIM.:		SERIAL No.:
MFR.: LIT by CARDI			SUR.:0.04985046		Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0	
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
ρ_{fc}	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)										
0.0																	
1.0	.307	.175	.055	.300	.171	.054	.286	.164	.052	.273	.158	.051	.262	.152	.049		
2.0	.288	.158	.048	.282	.155	.048	.270	.150	.047	.259	.145	.045	.249	.141	.044		
3.0	.267	.142	.043	.261	.140	.042	.251	.136	.041	.241	.132	.040	.232	.128	.040		
4.0	.247	.128	.038	.241	.126	.037	.232	.123	.037	.223	.120	.036	.215	.117	.036		
5.0	.228	.116	.034	.224	.115	.033	.215	.112	.033	.207	.109	.033	.200	.107	.032		
6.0	.212	.106	.030	.208	.105	.030	.200	.103	.030	.193	.100	.029	.186	.098	.029		
7.0	.197	.097	.028	.194	.096	.027	.187	.094	.027	.180	.093	.027	.175	.091	.027		
8.0	.184	.090	.025	.181	.089	.025	.175	.087	.025	.169	.086	.025	.164	.084	.025		
9.0	.173	.084	.023	.170	.083	.023	.164	.081	.023	.159	.080	.023	.154	.078	.023		
10.0	.162	.078	.022	.160	.077	.022	.155	.076	.021	.150	.075	.021	.146	.073	.021		

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.196	.196	.196	.168	.168	.168	.114	.114	.114	.066	.066	.066	.021	.021	.021	
1.0	.186	.162	.140	.159	.139	.121	.109	.096	.084	.063	.055	.049	.020	.018	.016	
2.0	.178	.138	.104	.152	.119	.090	.104	.082	.063	.060	.048	.037	.019	.015	.012	
3.0	.170	.120	.081	.146	.104	.070	.100	.072	.049	.058	.042	.029	.019	.014	.009	
4.0	.162	.107	.065	.139	.092	.056	.096	.064	.040	.055	.038	.023	.018	.012	.008	
5.0	.155	.096	.053	.133	.083	.047	.091	.058	.033	.053	.034	.019	.017	.011	.006	
6.0	.148	.088	.045	.127	.076	.040	.087	.053	.028	.051	.031	.017	.016	.010	.005	
7.0	.141	.081	.039	.121	.070	.034	.084	.049	.024	.049	.029	.014	.016	.010	.005	
8.0	.134	.075	.035	.116	.065	.030	.080	.046	.022	.047	.027	.013	.015	.009	.004	
9.0	.128	.070	.031	.111	.061	.027	.077	.043	.019	.045	.025	.012	.014	.008	.004	
10.0	.123	.066	.029	.106	.057	.025	.073	.040	.018	.043	.024	.011	.014	.008	.004	

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-02-18

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:12.800m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:231.05V I:0.0853A P:18.673W PF:0.9472 Freq:50.00Hz Lamp Flux:2406.74x1 lm										
NAME: 0017440215					TYPE:			WEIGHT:		
SPEC.:18.5W 4000K 2100lm					DIM.:			SERIAL No.:		
MFR.: LIT by CARDI					SUR.:0.04985046			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	22.0	23.5	22.3	23.7	24.0	21.9	23.4	22.1	23.6	23.8
3H	23.5	24.9	23.8	25.1	25.4	23.3	24.6	23.6	24.9	25.1
4H	24.1	25.4	24.4	25.7	26.0	23.8	25.1	24.1	25.4	25.7
6H	24.6	25.8	24.9	26.1	26.4	24.2	25.4	24.5	25.7	26.0
8H	24.8	26.0	25.1	26.2	26.6	24.3	25.5	24.7	25.8	26.1
12H	24.9	26.0	25.2	26.3	26.6	24.4	25.5	24.7	25.8	26.1
4H 2H	22.6	23.9	22.9	24.2	24.4	22.5	23.8	22.8	24.0	24.3
3H	24.2	25.4	24.6	25.7	26.0	24.0	25.2	24.4	25.5	25.8
4H	25.0	26.0	25.3	26.3	26.7	24.7	25.7	25.1	26.1	26.4
6H	25.5	26.5	26.0	26.8	27.2	25.2	26.1	25.6	26.5	26.9
8H	25.8	26.6	26.2	27.0	27.4	25.3	26.2	25.8	26.6	27.0
12H	25.9	26.7	26.4	27.1	27.5	25.4	26.2	25.9	26.6	27.1
8H 4H	25.2	26.1	25.6	26.4	26.8	24.9	25.8	25.4	26.2	26.6
6H	25.9	26.6	26.4	27.1	27.5	25.6	26.3	26.0	26.7	27.2
8H	26.2	26.8	26.7	27.3	27.7	25.8	26.4	26.3	26.9	27.4
12H	26.4	27.0	26.9	27.4	27.9	26.0	26.5	26.4	27.0	27.5
12H 4H	25.2	26.0	25.6	26.4	26.8	25.0	25.8	25.4	26.2	26.6
6H	26.0	26.6	26.4	27.0	27.5	25.6	26.3	26.1	26.7	27.2
8H	26.3	26.8	26.8	27.3	27.8	25.9	26.5	26.4	26.9	27.4
Variations with the observer position at spacings:										
S = 1.0H	+ 0.2 / - 0.2					+ 0.2 / - 0.2				
1.5H	+ 0.1 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.2				

CIE Pub.117, 2407 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 3.1)
Area: 0.0498505 m2

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-02-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:12.800m [K=1.0000]
Remarks:


```

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:12.800m [K=1.0000]
Remarks:

```

ISOCANDELA DIAGRAM

Test:U:231.05V I:0.0853A P:18.673W PF:0.9472 Freq:50.00Hz Lamp Flux:2406.74x1 lm		
NAME: 0017440215	TYPE:	WEIGHT:
SPEC.:18.5W 4000K 2100lm	DIM.:	SERIAL No.:
MFR.: LIT by CARDI	SUR.:0.04985046	Shielding Angle:

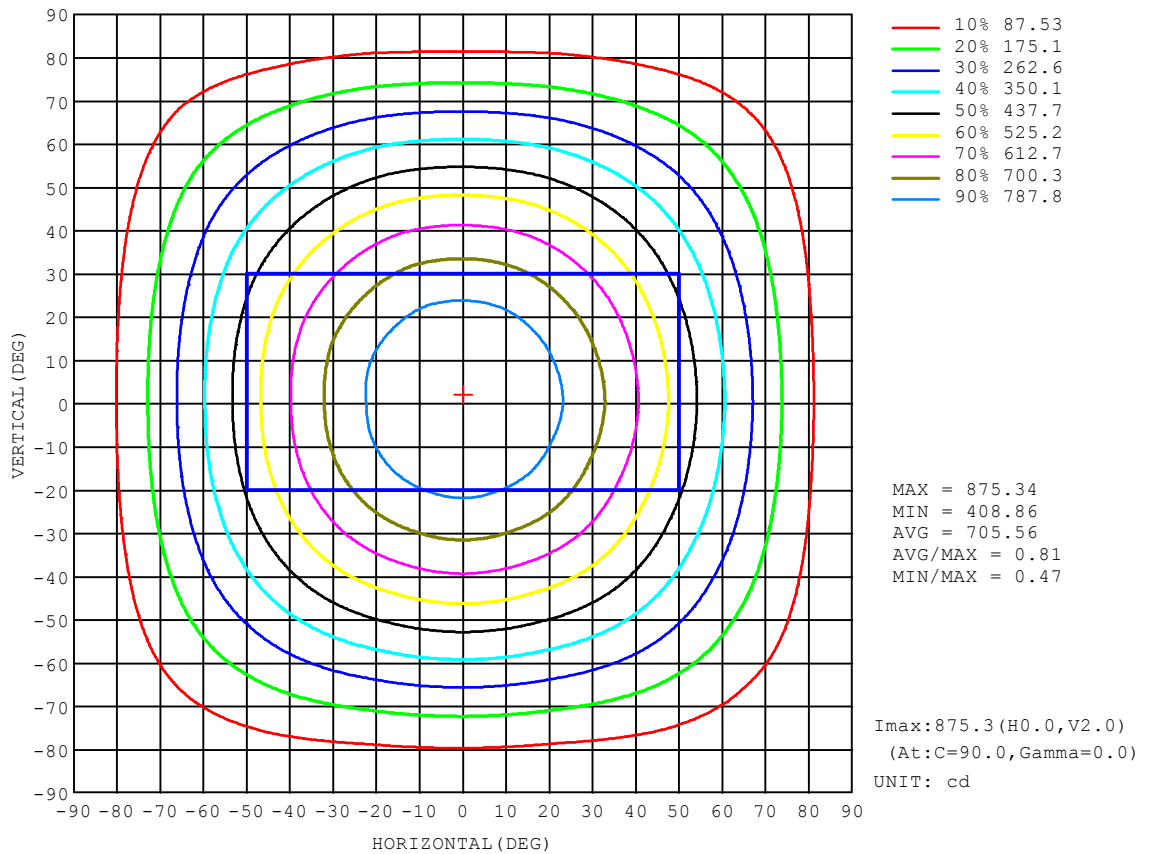


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-02-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:12.800m [K=1.0000]
Remarks:

AAI Figure

Test:U:231.05V I:0.0853A P:18.673W PF:0.9472 Freq:50.00Hz Lamp Flux:2406.74x1 lm		
NAME: 0017440215	TYPE:	WEIGHT:
SPEC.:18.5W 4000K 2100lm	DIM.:	SERIAL No.:
MFR.: LIT by CARDI	SUR.:0.04985046	Shielding Angle:

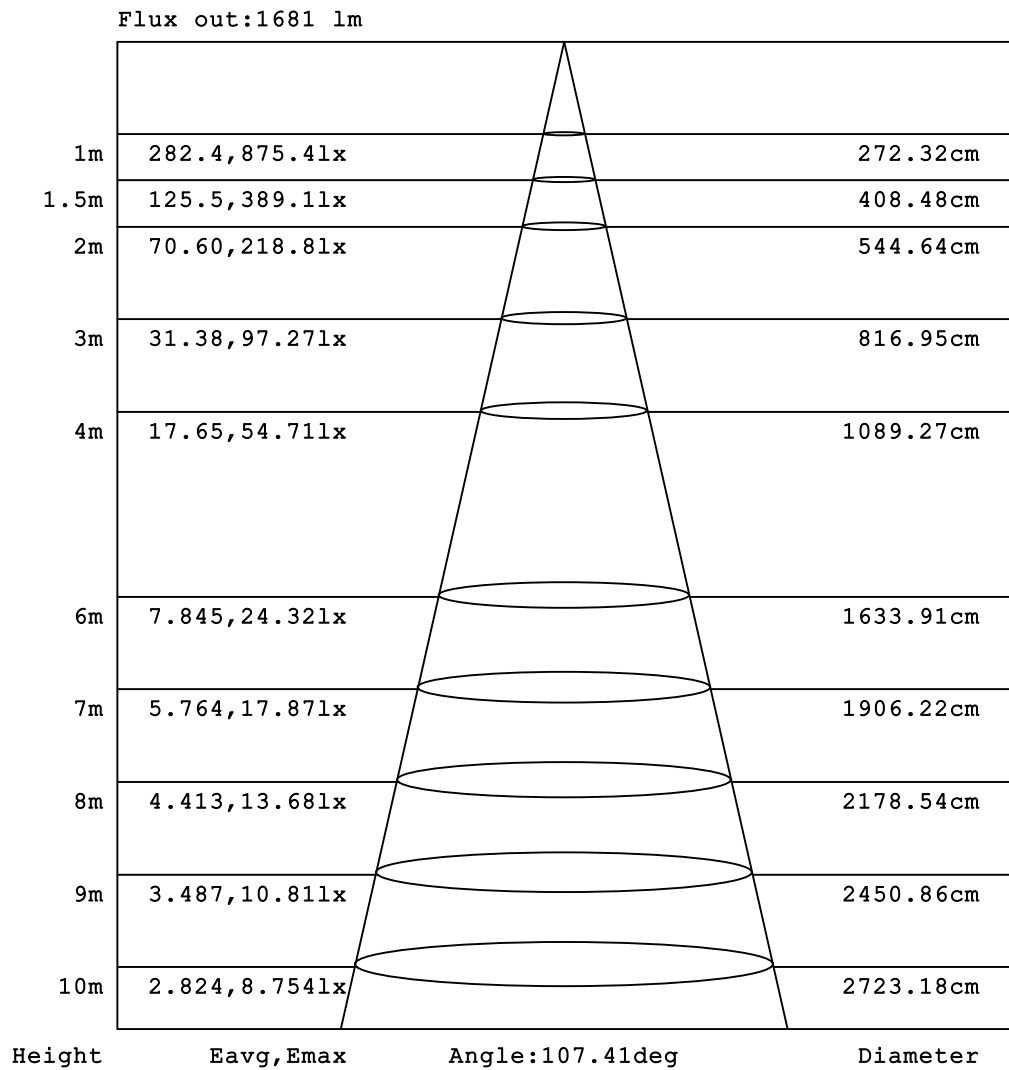


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-02-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:12.800m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:231.05V I:0.0853A P:18.673W PF:0.9472 Freq:50.00Hz Lamp Flux:2406.74x1 lm		
NAME: 0017440215	TYPE:	WEIGHT:
SPEC.:18.5W 4000K 2100lm	DIM.:	SERIAL No.:
MFR.: LIT by CARDI	SUR.:0.04985046	Shielding Angle:

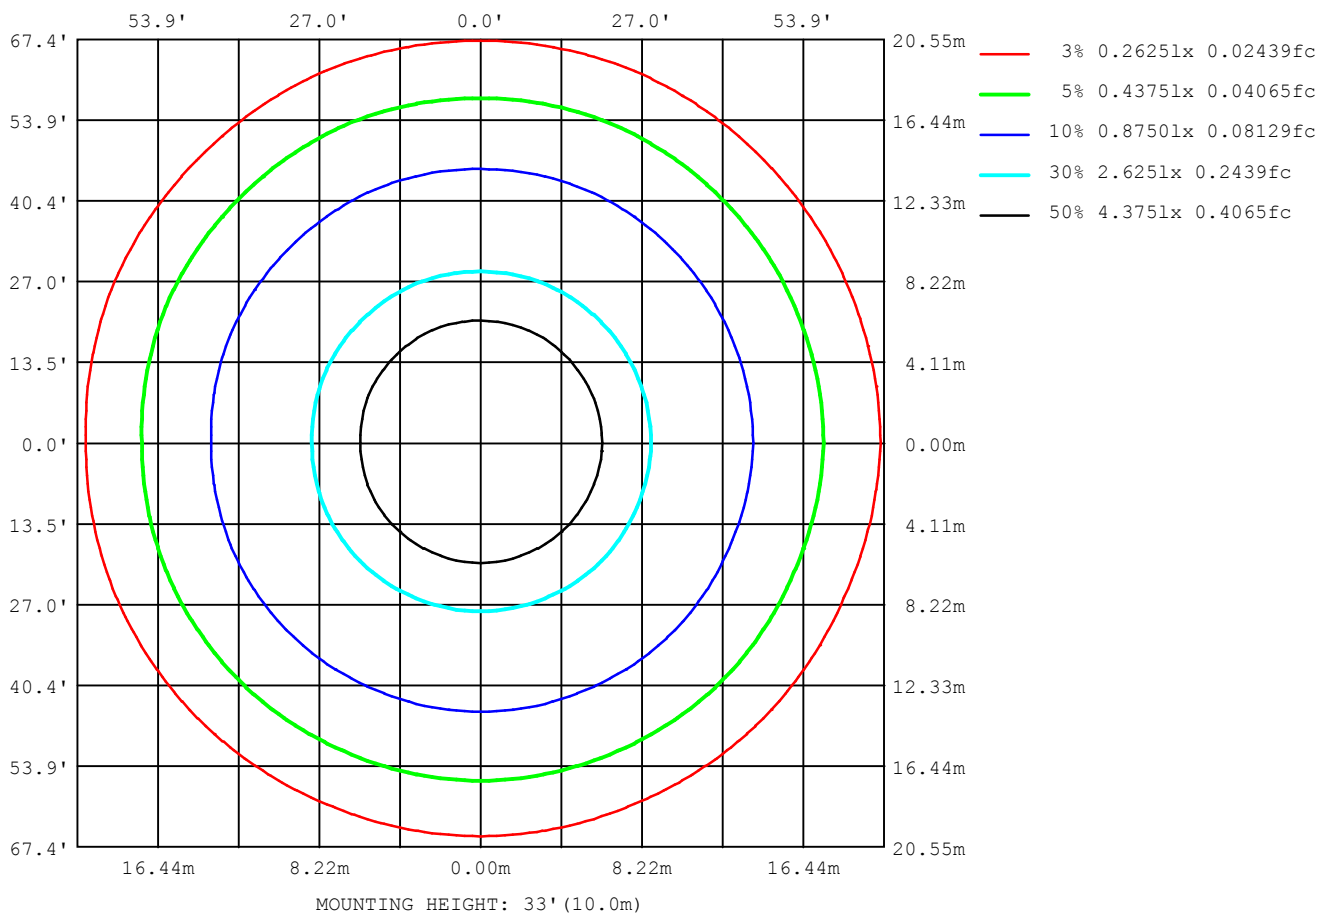

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-02-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:12.800m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:231.05V I:0.0853A P:18.673W PF:0.9472 Freq:50.00Hz Lamp Flux:2406.74x1 lm		
NAME: 0017440215	TYPE:	WEIGHT:
SPEC.:18.5W 4000K 2100lm	DIM.:	SERIAL No.:
MFR.: LIT by CARDI	SUR.:0.04985046	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	13475
L_0~180 (75) av	11962
L_0~180 (85) av	9615
L_90~270 (65) av	13477
L_90~270 (75) av	11883
L_90~270 (85) av	9366
L_45 (65) av	13485
L_45 (75) av	11926
L_45 (85) av	9473

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-02-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:12.800m [K=1.0000]
Remarks:

Planar Illuminance Curve

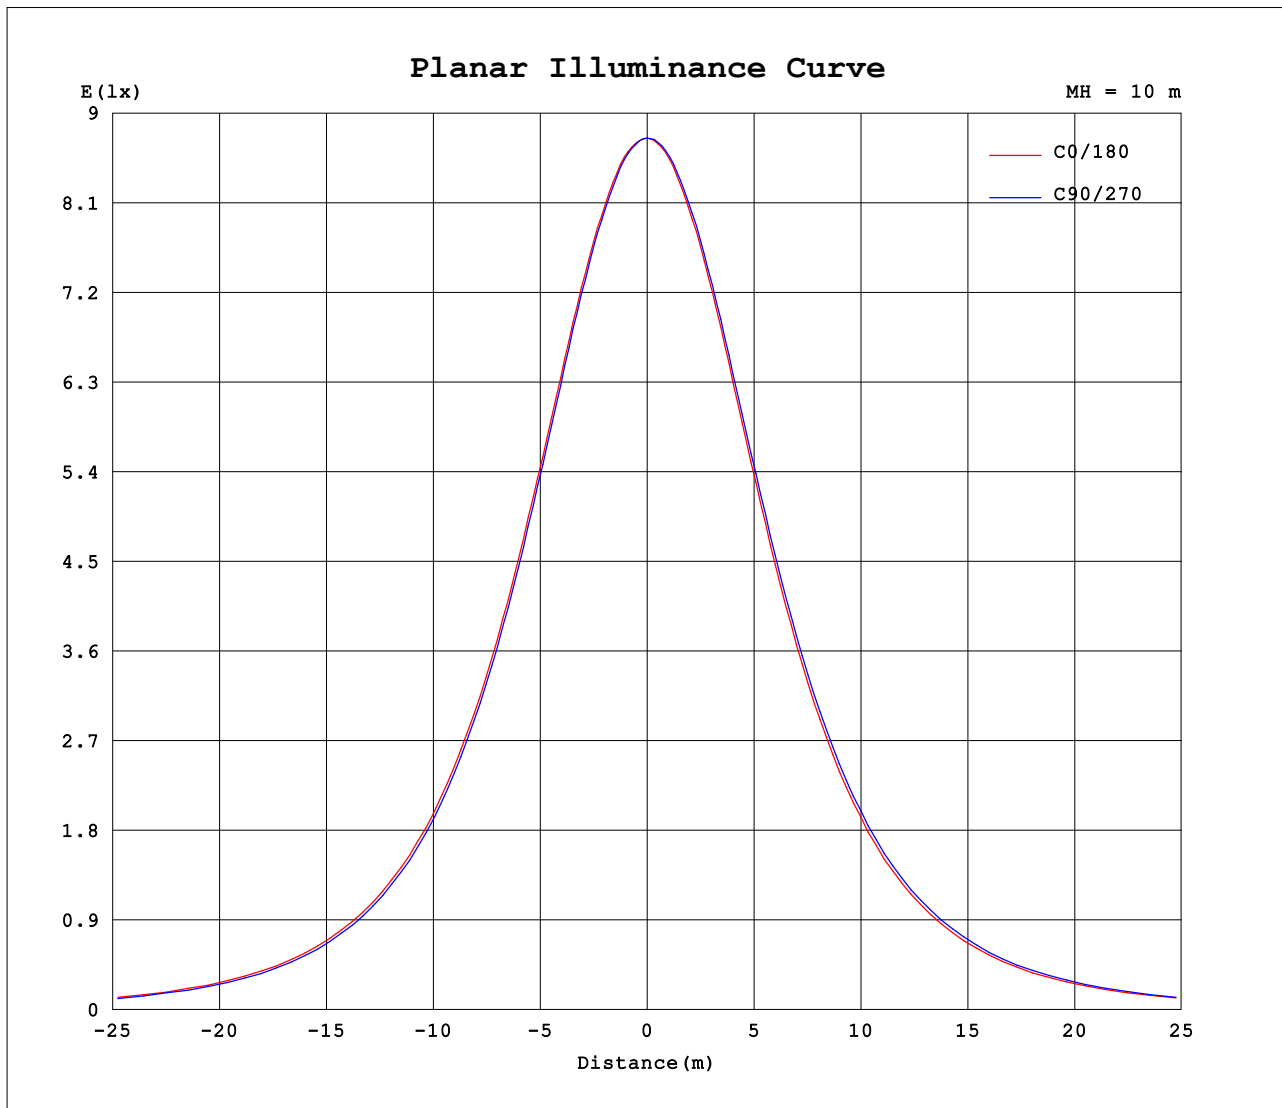

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2025-02-18

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.421
 Humidity: 65.0%
 Test Distance: 12.800m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:231.05V I:0.0853A P:18.673W PF:0.9472 Freq:50.00Hz Lamp Flux:2406.74x1 lm		
NAME: 0017440215	TYPE:	WEIGHT:
SPEC.:18.5W 4000K 2100lm	DIM.:	SERIAL No.:
MFR.: LIT by CARDI	SUR.:0.04985046	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	875	875	875	875	875	875	875	875	875	875	875	875	875	875	875	875			
5	872	870	870	869	869	869	870	871	870	872	872	873	873	873	872	871			
10	860	856	856	854	855	855	857	857	857	860	860	862	861	862	860	859			
15	839	834	834	831	833	832	834	836	835	840	841	843	842	842	840	838			
20	810	804	803	800	802	801	804	805	805	811	813	816	814	814	811	810			
25	774	766	765	761	763	762	766	768	766	775	776	780	778	778	774	772			
30	729	720	719	715	717	715	720	722	721	731	732	737	734	735	730	728			
35	678	667	667	662	664	662	667	669	668	679	681	686	684	684	679	676			
40	620	609	609	603	605	604	609	611	610	622	624	630	627	628	622	619			
45	559	547	546	541	543	541	546	548	547	560	563	569	565	566	560	557			
50	494	481	481	475	477	475	480	483	481	495	497	504	500	501	495	492			
55	427	414	413	407	409	407	413	415	414	428	430	436	433	434	428	425			
60	358	345	344	338	340	338	344	347	345	359	361	368	364	365	359	357			
65	290	277	276	269	272	270	277	279	277	291	292	299	296	297	291	289			
70	224	211	209	203	206	205	211	213	211	224	225	231	228	230	225	222			
75	160	147	146	140	143	142	148	151	149	160	161	166	164	165	161	159			
80	101	87.7	87.2	81.0	84.7	83.4	89.8	91.1	88.9	101	101	106	103	105	101	99.3			
85	46.9	35.3	35.1	29.8	33.3	31.8	37.5	38.5	36.7	47.1	46.2	51.4	48.1	50.8	45.9	45.3			
90	1.55	1.30	1.31	1.33	1.33	1.33	1.32	1.30	0.39	1.41	1.13	4.95	2.44	3.83	0.58	0.59			
95	1.55	1.63	1.63	1.67	1.65	1.66	1.63	1.61	0.53	0.48	0.48	0.46	0.47	0.47	0.48	0.49			
100	1.91	2.00	2.01	2.05	2.04	2.05	2.00	1.99	0.71	0.66	0.66	0.63	0.64	0.63	0.66	0.66			
105	2.33	2.41	2.42	2.47	2.45	2.46	2.41	2.40	0.93	0.87	0.87	0.83	0.85	0.84	0.86	0.87			
110	2.75	2.83	2.84	2.89	2.87	2.88	2.83	2.82	1.18	1.11	1.10	1.07	1.08	1.07	1.10	1.11			
115	3.17	3.26	3.26	3.32	3.29	3.29	3.25	3.24	1.47	1.38	1.37	1.34	1.36	1.34	1.37	1.38			
120	3.59	3.66	3.67	3.72	3.71	3.71	3.66	3.65	1.79	1.69	1.68	1.64	1.66	1.64	1.68	1.69			
125	3.99	4.07	4.08	4.12	4.11	4.10	4.06	4.05	2.15	2.03	2.02	1.98	2.01	1.99	2.02	2.04			
130	4.37	4.44	4.45	4.49	4.48	4.48	4.43	4.42	2.53	2.41	2.40	2.34	2.38	2.36	2.40	2.41			
135	4.72	4.78	4.79	4.83	4.81	4.81	4.76	4.76	2.93	2.81	2.80	2.75	2.78	2.75	2.80	2.81			
140	5.03	5.10	5.11	5.14	5.12	5.12	5.08	5.07	3.33	3.21	3.20	3.15	3.18	3.15	3.20	3.21			
145	5.32	5.40	5.40	5.43	5.42	5.41	5.37	5.37	3.73	3.61	3.60	3.55	3.58	3.56	3.60	3.62			
150	5.57	5.64	5.64	5.66	5.64	5.63	5.60	5.60	4.18	4.05	4.06	4.00	4.02	4.00	4.05	4.07			
155	5.76	5.82	5.82	5.83	5.81	5.80	5.78	5.78	4.66	4.55	4.52	4.47	4.49	4.46	4.52	4.53			
160	5.96	6.00	5.98	5.98	5.95	5.95	5.94	5.94	5.08	4.97	4.92	4.86	4.90	4.88	4.92	4.94			
165	6.15	6.15	6.14	6.11	6.09	6.08	6.10	6.11	5.42	5.31	5.28	5.22	5.21	5.21	5.26	5.29			
170	6.25	6.23	6.20	6.17	6.14	6.15	6.18	6.19	5.72	5.62	5.61	5.54	5.54	5.52	5.59	5.60			
175	6.23	6.21	6.17	6.14	6.11	6.11	6.15	6.17	5.98	5.90	5.89	5.82	5.84	5.82	5.86	5.88			
180	6.15	6.10	6.07	6.02	6.02	6.02	6.05	6.07	6.16	6.10	6.07	6.02	6.02	6.02	6.05	6.07			

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-02-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:12.800m [K=1.0000]
Remarks: