
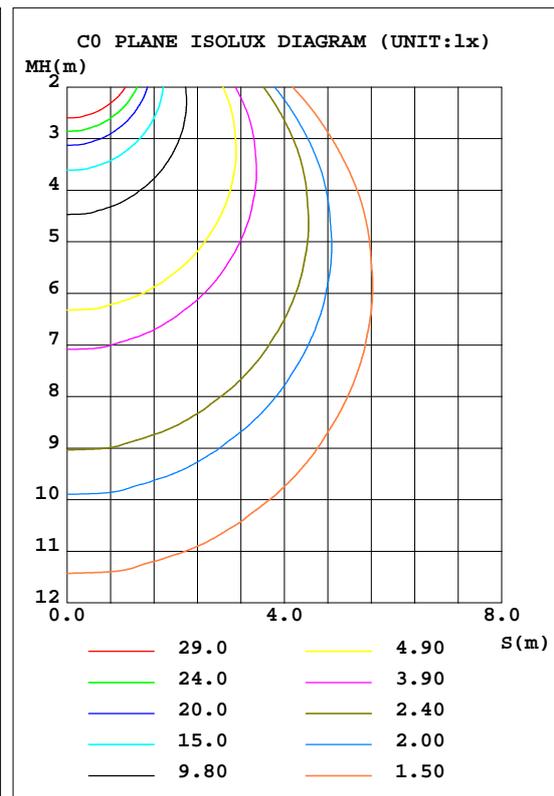


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:93.7V I:0.0470A P:4.406W PF:1.0000 Freq:0Hz Lamp Flux:584.422x1 lm		
SGSO SKU: 0028920142	TYPE: /	WEIGHT: /
SPEC.:0.3m T5 Cabinet,5W,525lm,105lm/W,3CCT Switch,3000/3500/4000K,Linkable	DIM.: /	SERIAL No.:N21LEDGW1109001-07
MFR.: /	SUR.: /	Shielding Angle: /

DATA OF LAMP		PHOTOMETRIC DATA Eff: 132.64 lm/W			
MODEL	TP-T5C01-5-3000K	Imax(cd)	197.3	S/MH(C0/180)	1.32
NOMINAL POWER(W)	5	LOR(%)	100.0	S/MH(C90/270)	1.34
RATED VOLTAGE(V)	DC94	TOTAL FLUX(lm)	584.42	h UP, DN(C0-180)	0.0,46.9
NOMINAL FLUX(lm)	584.422	CIE CLASS	DIRECT	h UP, DN(C180-360)	0.0,53.1
LAMPS INSIDE	1	h up(%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)		h down(%)	100.0	CIBSE SHR MAX	1.35

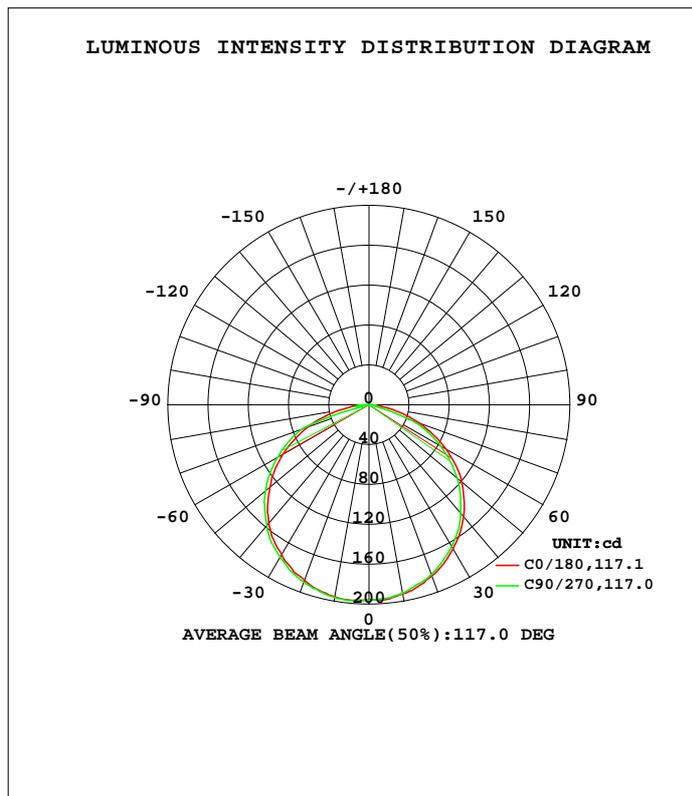

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.2DEG
 Operators:GHH
 Test Date:2021-12-30

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.404.6
 Humidity:46%
 Test Distance:26.000m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum,lamp
10	192.6	191.2	191.8	192.8	195.5	195.3	196.0	193.5	0- 10	18.59	18.59	3.18,3.18
20	182.7	180.2	181.2	183.2	187.4	188.0	189.6	185.7	10- 20	53.58	72.17	12.3,12.3
30	167.1	163.6	164.3	167.5	173.7	175.8	176.7	172.6	20- 30	82.12	154.3	26.4,26.4
40	146.4	141.2	141.8	146.8	155.1	157.8	158.3	152.4	30- 40	100.6	254.9	43.6,43.6
50	120.5	113.2	114.9	120.3	128.7	134.3	134.3	127.6	40- 50	106.2	361.2	61.8,61.8
60	88.19	80.82	82.29	88.88	98.78	105.0	104.3	97.06	50- 60	97.58	458.7	78.5,78.5
70	52.30	45.61	45.35	53.85	64.13	70.83	71.33	62.46	60- 70	75.22	533.9	91.4,91.4
80	18.16	12.91	0.2512	19.21	27.89	34.88	0.2926	26.26	70- 80	39.82	573.8	98.2,98.2
90	0.6274	0.6235	0.1672	0.7875	2.259	5.070	0	1.658	80- 90	10.65	584.4	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 308.23 lm

%lum = 52.7%
 %lamp = 52.7%

Conical surface Flux(120deg): 458.73 lm


%lum = 78.5%
 %lamp = 78.5%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.2DEG
 Operators:GHH
 Test Date:2021-12-30

g Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.404.6
 Humidity:46%
 Test Distance:26.000m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:93.7V I:0.0470A P:4.406W PF:1.0000 Freq:0Hz Lamp Flux:584.422x1 lm		
SGSO SKU: 0028920142	TYPE: /	WEIGHT: /
SPEC.:0.3m T5 Cabinet,5W,525lm,105lm/W,3CCT Switch,3000/3500/4000K,Linkable	DIM.: /	SERIAL No.:N21LEDGW1109001-07
MFR.: /	SUR.: /	Shielding Angle: /

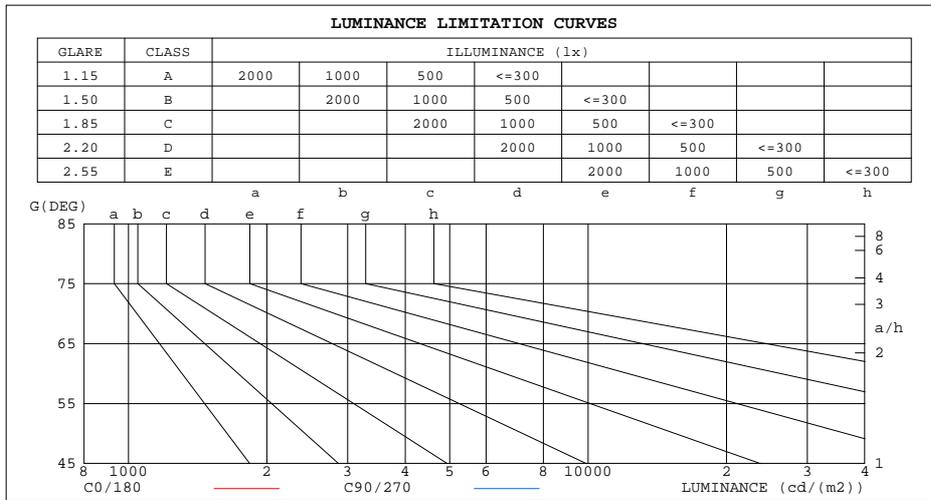


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.2DEG
 Operators:GHH
 Test Date:2021-12-30

G Range: 0 - 90DEG
 G Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.404.6
 Humidity:46%
 Test Distance:26.000m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:93.7V I:0.0470A P:4.406W PF:1.0000 Freq:0Hz Lamp Flux:584.422x1 lm		
SGSO SKU: 0028920142	TYPE: /	WEIGHT: /
SPEC.:0.3m T5 Cabinet,5W,525lm,105lm/W,3CCT Switch,3000/3500/4000K,Linkable	DIM.: /	SERIAL No.:N21LEDGW1109001-07
MFR.: /	SUR.: /	Shielding Angle: /

r _{cc}	80%			70%			50%			30%			10%			0
r _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.04	.00	.96	1.02	.98	.94	.97	.94	.91	.93	.91	.88	.90	.88	.86	.84
2.0	.90	.83	.78	.88	.82	.77	.85	.79	.75	.82	.77	.73	.78	.75	.71	.69
3.0	.79	.71	.64	.78	.70	.64	.75	.68	.63	.72	.66	.61	.69	.64	.60	.58
4.0	.70	.61	.54	.69	.60	.54	.66	.59	.53	.64	.57	.52	.62	.56	.52	.49
5.0	.62	.53	.47	.61	.53	.46	.59	.52	.46	.57	.50	.45	.55	.49	.45	.43
6.0	.56	.47	.40	.55	.47	.40	.53	.46	.40	.52	.45	.40	.50	.44	.39	.37
7.0	.51	.42	.36	.50	.41	.35	.48	.41	.35	.47	.40	.35	.46	.39	.35	.33
8.0	.46	.38	.32	.46	.37	.32	.44	.37	.31	.43	.36	.31	.42	.36	.31	.29
9.0	.42	.34	.28	.42	.34	.28	.41	.33	.28	.40	.33	.28	.38	.32	.28	.26
10.0	.39	.31	.26	.39	.31	.26	.38	.30	.26	.37	.30	.25	.36	.30	.25	.24

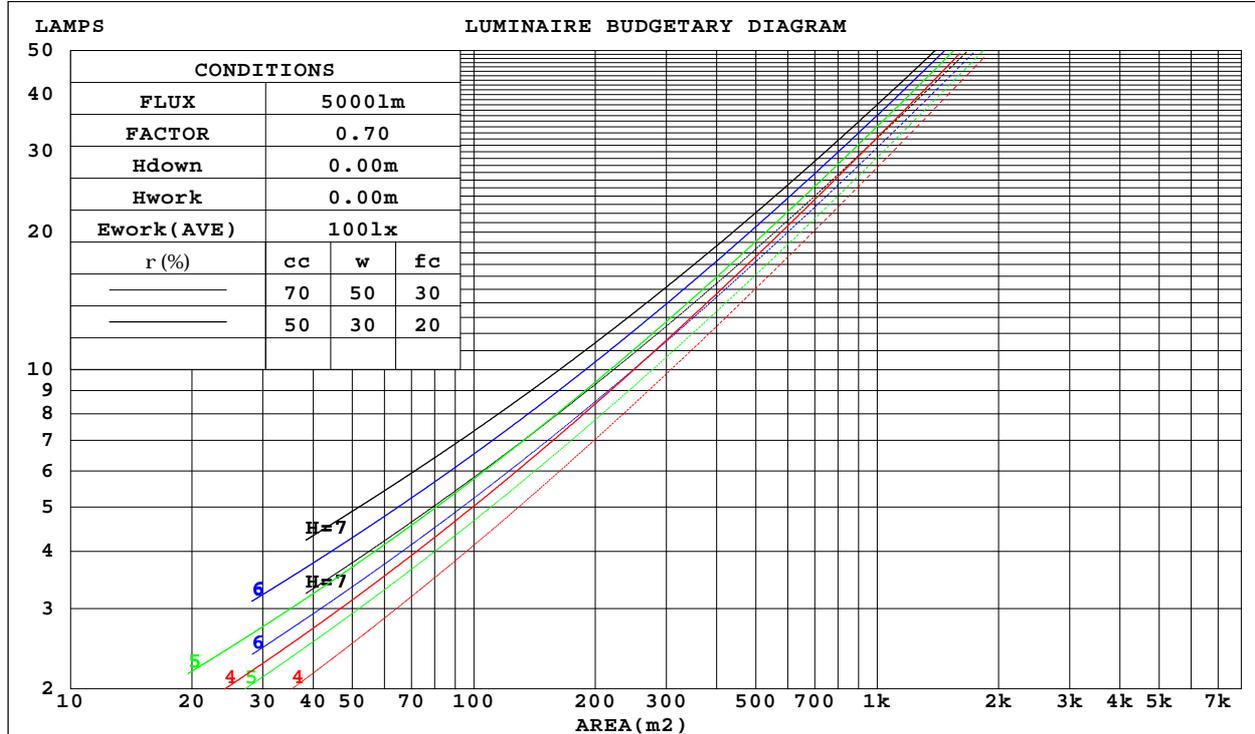

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.2DEG
 Operators:GHH
 Test Date:2021-12-30

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.404.6
 Humidity:46%
 Test Distance:26.000m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:93.7V I:0.0470A P:4.406W PF:1.0000 Freq:0Hz Lamp Flux:584.422x1 lm		
SGSO SKU: 0028920142	TYPE: /	WEIGHT: /
SPEC.:0.3m T5 Cabinet,5W,525lm,105lm/W,3CCT Switch,3000/3500/4000K,Linkable	DIM.: /	SERIAL No.:N21LEDGW1109001-07
MFR.: /	SUR.: /	Shielding Angle: /

rcc	80%			70%			50%			30%			10%			0
rw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
rfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.311	.177	.056	.304	.173	.055	.290	.167	.053	.278	.160	.051	.267	.155	.050	
2.0	.293	.161	.049	.287	.158	.049	.275	.153	.048	.264	.148	.046	.254	.144	.045	
3.0	.272	.145	.043	.266	.143	.043	.256	.139	.042	.246	.135	.041	.237	.131	.041	
4.0	.251	.130	.038	.246	.129	.038	.237	.126	.037	.228	.123	.037	.220	.120	.036	
5.0	.232	.118	.034	.228	.117	.034	.219	.114	.034	.212	.112	.033	.205	.109	.033	
6.0	.215	.108	.031	.211	.107	.031	.204	.105	.030	.197	.102	.030	.191	.100	.030	
7.0	.200	.099	.028	.197	.098	.028	.190	.096	.028	.184	.094	.027	.178	.093	.027	
8.0	.187	.091	.026	.184	.090	.026	.178	.089	.025	.172	.087	.025	.167	.086	.025	
9.0	.175	.085	.024	.172	.084	.024	.167	.083	.023	.162	.081	.023	.158	.080	.023	
10.0	.165	.079	.022	.162	.078	.022	.157	.077	.022	.153	.076	.022	.149	.075	.021	

rcc	80%			70%			50%			30%			10%			0
rw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
rfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.180	.156	.134	.154	.134	.116	.106	.092	.080	.061	.053	.046	.019	.017	.015	
2.0	.172	.132	.098	.148	.114	.085	.101	.079	.059	.058	.046	.035	.019	.015	.011	
3.0	.165	.114	.074	.141	.099	.064	.097	.069	.045	.056	.040	.027	.018	.013	.009	
4.0	.157	.101	.058	.135	.087	.050	.093	.061	.036	.054	.036	.021	.017	.012	.007	
5.0	.150	.091	.047	.129	.078	.041	.089	.055	.029	.051	.032	.017	.017	.010	.006	
6.0	.143	.082	.039	.123	.071	.034	.085	.050	.024	.049	.029	.014	.016	.010	.005	
7.0	.136	.075	.033	.117	.065	.029	.081	.046	.020	.047	.027	.012	.015	.009	.004	
8.0	.129	.070	.029	.111	.060	.025	.077	.042	.018	.045	.025	.011	.015	.008	.003	
9.0	.123	.065	.025	.106	.056	.022	.074	.039	.016	.043	.023	.009	.014	.008	.003	
10.0	.118	.060	.022	.101	.052	.019	.070	.037	.014	.041	.022	.008	.013	.007	.003	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.2DEG
 Operators:GHH
 Test Date:2021-12-30

g Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.404.6
 Humidity:46%
 Test Distance:26.000m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:93.7V I:0.0470A P:4.406W PF:1.0000 Freq:0Hz Lamp Flux:584.422x1 lm										
SGSO SKU: 0028920142					TYPE: /			WEIGHT: /		
SPEC.:0.3m T5 Cabinet,5W,525lm,105lm/W,3CCT Switch,3000/3500/4000K,Linkable					DIM.: /			SERIAL No.:N21LEDGW1109001-07		
MFR.: /					SUR.: /			Shielding Angle: /		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	10.8	12.4	11.1	12.6	12.8	10.6	12.1	10.8	12.3	12.5
3H	12.2	13.7	12.5	13.9	14.1	11.8	13.2	12.1	13.5	13.7
4H	12.7	14.1	13.1	14.3	14.6	12.0	13.3	12.3	13.6	13.8
6H	13.0	14.3	13.4	14.6	14.9	11.9	13.2	12.3	13.5	13.7
8H	13.1	14.3	13.4	14.6	14.9	11.9	13.1	12.3	13.4	13.7
12H	13.1	14.3	13.4	14.6	14.9	11.9	13.1	12.2	13.4	13.7
4H 2H	11.3	12.7	11.6	12.9	13.2	11.1	12.5	11.4	12.7	13.0
3H	12.9	14.1	13.2	14.4	14.7	12.5	13.7	12.9	14.0	14.3
4H	13.5	14.6	13.9	14.9	15.2	12.8	13.9	13.2	14.2	14.6
6H	13.9	14.8	14.3	15.2	15.5	12.8	13.8	13.2	14.2	14.5
8H	13.9	14.8	14.3	15.2	15.6	12.9	13.8	13.3	14.1	14.5
12H	14.0	14.8	14.4	15.2	15.6	12.9	13.7	13.3	14.1	14.5
8H 4H	13.6	14.5	14.0	14.9	15.3	13.0	13.9	13.4	14.3	14.6
6H	14.1	14.8	14.5	15.2	15.6	13.1	13.9	13.6	14.3	14.7
8H	14.2	14.8	14.6	15.3	15.7	13.2	13.8	13.6	14.3	14.7
12H	14.2	14.8	14.7	15.2	15.7	13.2	13.7	13.7	14.2	14.7
12H 4H	13.6	14.4	14.0	14.8	15.2	13.0	13.8	13.4	14.2	14.6
6H	14.0	14.7	14.5	15.1	15.6	13.1	13.8	13.6	14.2	14.7
8H	14.2	14.7	14.7	15.2	15.7	13.2	13.8	13.7	14.2	14.7
Variations with the observer position at spacings:										
S = 1.0H	+ 0.2 / - 0.2					+ 0.2 / - 0.3				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.4				
2.0H	+ 0.3 / - 0.4					+ 0.3 / - 0.3				

CIE Pub.117, 584.4 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = -1.9)

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.2DEG
 Operators:GHH
 Test Date:2021-12-30

g Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.404.6
 Humidity:46%
 Test Distance:26.000m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:93.7V I:0.0470A P:4.406W PF:1.0000 Freq:0Hz Lamp Flux:584.422x1 lm		
SGSO SKU: 0028920142	TYPE: /	WEIGHT: /
SPEC.:0.3m T5 Cabinet,5W,525lm,105lm/W,3CCT Switch,3000/3500/4000K,Linkable	DIM.: /	SERIAL No.:N21LEDGW1109001-07
MFR.: /	SUR.: /	Shielding Angle: /


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) k(RI) x RCR = 5									
k = 0.60	57	45	38	56	45	38	55	44	38	31
0.80	67	55	48	66	55	48	64	54	47	40
1.00	76	64	57	74	64	57	72	65	56	49
1.25	83	72	65	81	71	64	79	70	64	56
1.50	88	78	71	86	77	70	83	75	69	62
2.00	95	86	80	93	85	79	89	83	77	69
2.50	99	91	85	97	89	84	93	87	82	74
3.00	102	95	90	100	94	89	96	91	86	78
4.00	106	100	96	104	99	94	100	95	92	83
5.00	109	104	100	106	102	98	102	98	95	86
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.2DEG
 Operators:GHH
 Test Date:2021-12-30

g Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.404.6
 Humidity:46%
 Test Distance:26.000m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:93.7V I:0.0470A P:4.406W PF:1.0000 Freq:0Hz Lamp Flux:584.422x1 lm		
SGSO SKU: 0028920142	TYPE: /	WEIGHT: /
SPEC.:0.3m T5 Cabinet,5W,525lm,105lm/W,3CCT Switch,3000/3500/4000K,Linkable	DIM.: /	SERIAL No.:N21LEDGW1109001-07
MFR.: /	SUR.: /	Shielding Angle: /

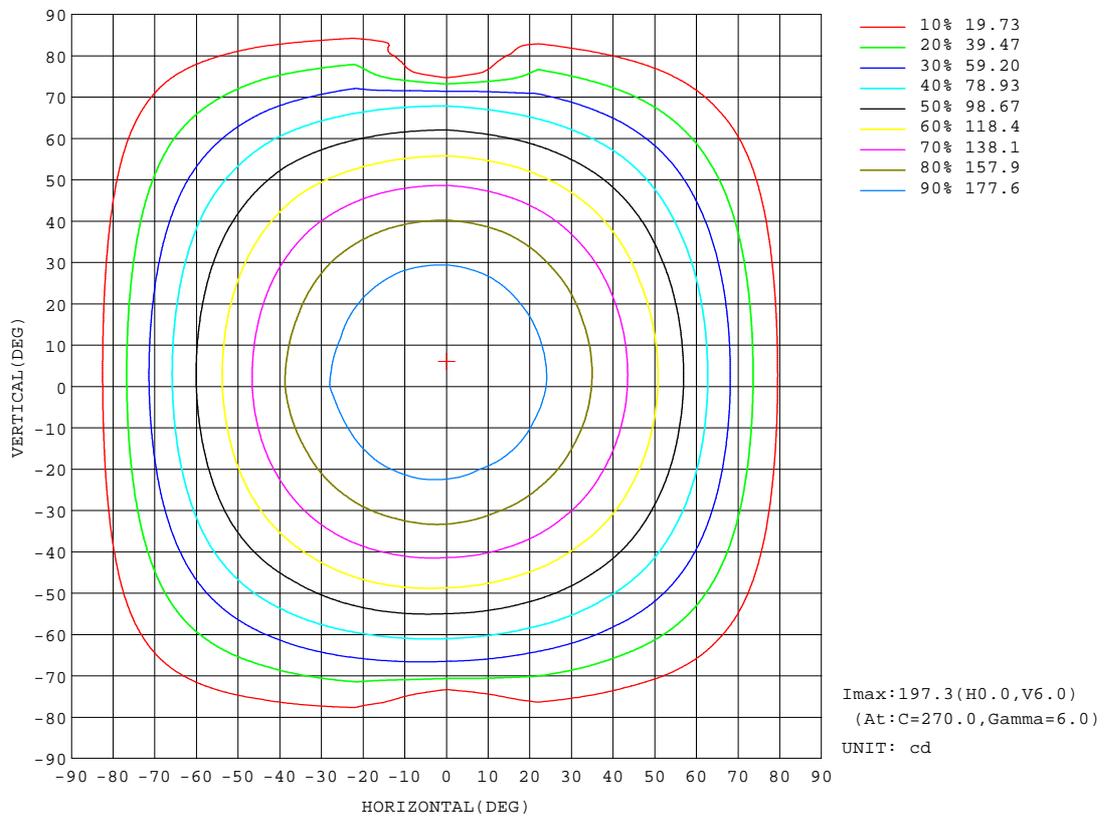


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.2DEG
Operators:GHH
Test Date:2021-12-30

Range: 0 - 90DEG
Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.404.6
Humidity:46%
Test Distance:26.000m [K=1.0000]
Remarks:

AAI Figure

Test:U:93.7V I:0.0470A P:4.406W PF:1.0000 Freq:0Hz Lamp Flux:584.422x1 lm		
SGSO SKU: 0028920142	TYPE: /	WEIGHT: /
SPEC.:0.3m T5 Cabinet,5W,525lm,105lm/W,3CCT Switch,3000/3500/4000K,Linkable	DIM.: /	SERIAL No.:N21LEDGW1109001-07
MFR.: /	SUR.: /	Shielding Angle: /

Flux out:449.8 lm

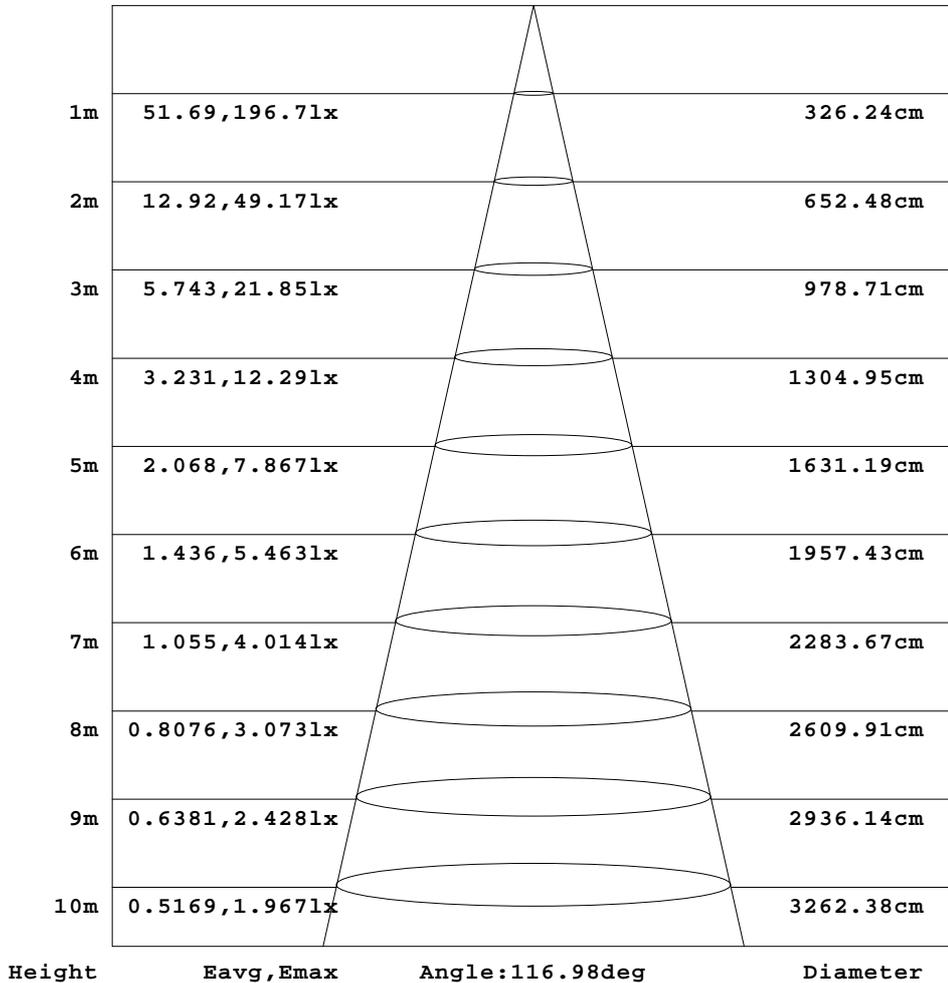


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.2DEG
 Operators:GHH
 Test Date:2021-12-30

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.404.6
 Humidity:46%
 Test Distance:26.000m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:93.7V I:0.0470A P:4.406W PF:1.0000 Freq:0Hz Lamp Flux:584.422x1 lm		
SGSO SKU: 0028920142	TYPE: /	WEIGHT: /
SPEC.:0.3m T5 Cabinet,5W,525lm,105lm/W,3CCT Switch,3000/3500/4000K,Linkable	DIM.: /	SERIAL No.:N21LEDGW1109001-07
MFR.: /	SUR.: /	Shielding Angle: /

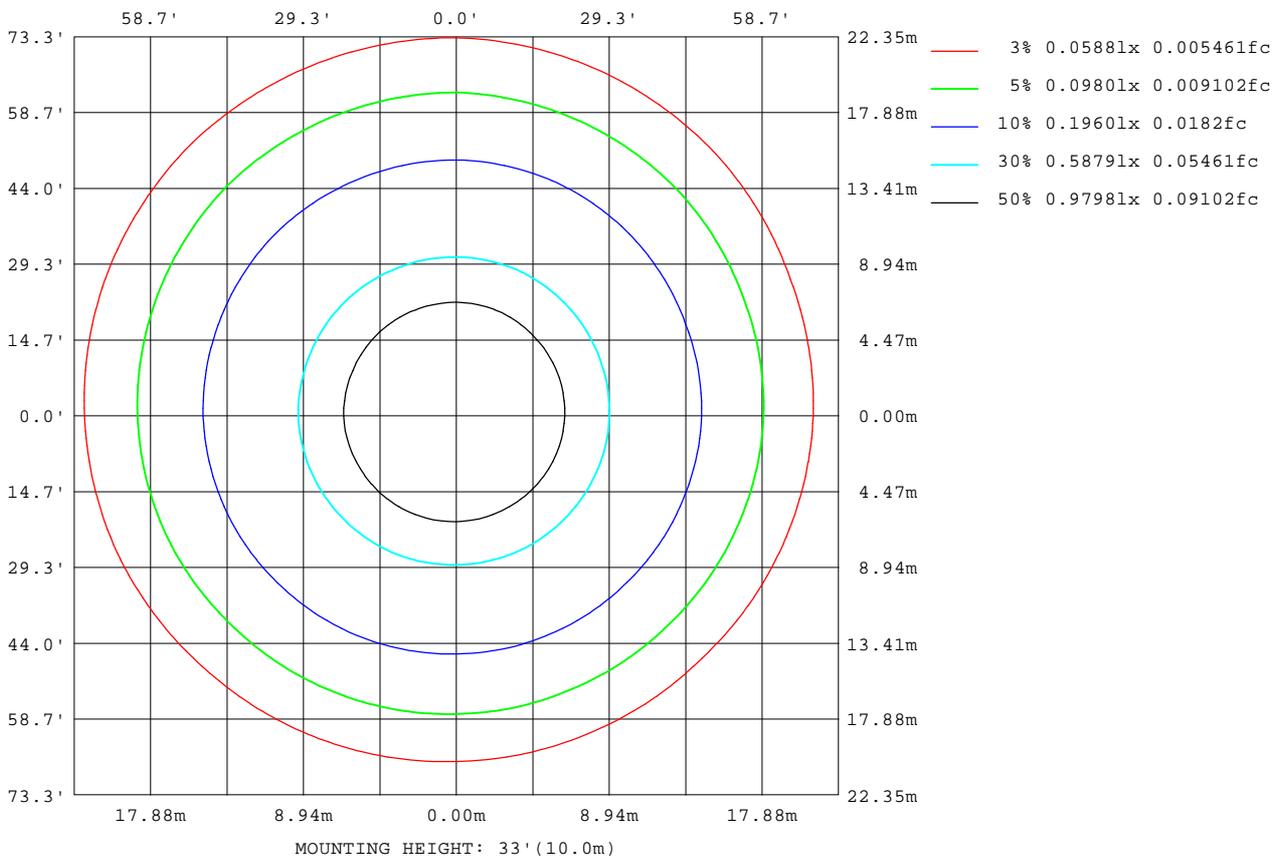

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.2DEG
 Operators: GHH
 Test Date: 2021-12-30

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.0.404.6
 Humidity: 46%
 Test Distance: 26.000m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:93.7V I:0.0470A P:4.406W PF:1.0000 Freq:0Hz Lamp Flux:584.422x1 lm		
SGSO SKU: 0028920142	TYPE: /	WEIGHT: /
SPEC.:0.3m T5 Cabinet,5W,525lm,105lm/W,3CCT Switch,3000/3500/4000K,Linkable	DIM.: /	SERIAL No.:N21LEDGW1109001-07
MFR.: /	SUR.: /	Shielding Angle: /


AvgL	cd/m2
L_0~180(65)av	595
L_0~180(75)av	512
L_0~180(85)av	339
L_90~270(65)av	599
L_90~270(75)av	163
L_90~270(85)av	266
L_45(65)av	594
L_45(75)av	513
L_45(85)av	362

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.2DEG
 Operators:GHH
 Test Date:2021-12-30

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.404.6
 Humidity:46%
 Test Distance:26.000m [K=1.0000]
 Remarks:

Planar Illuminance Curve

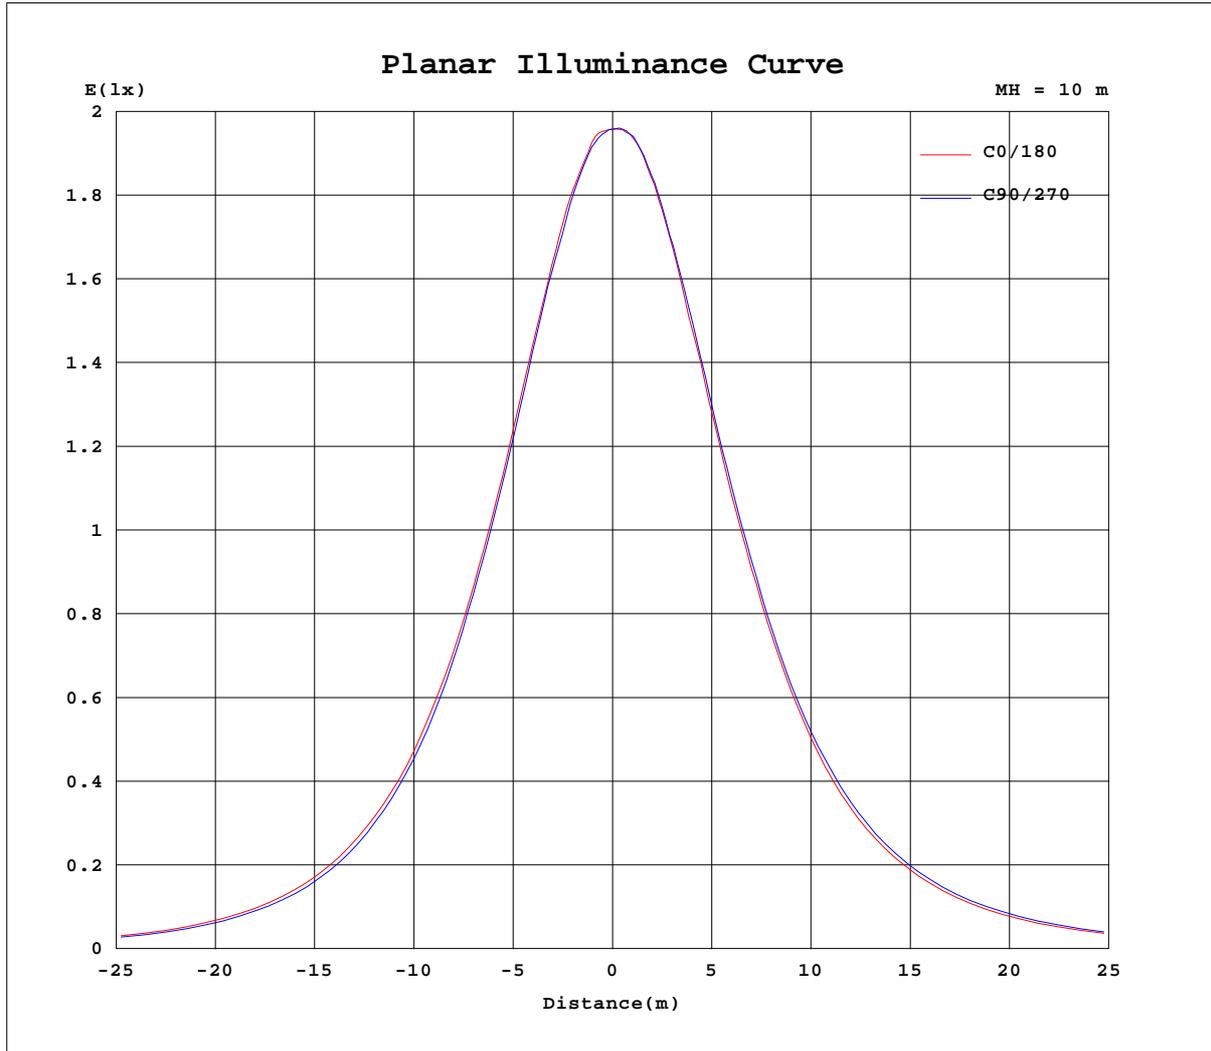

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.2DEG
 Operators: GHH
 Test Date: 2021-12-30

Page Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.0.404.6
 Humidity: 46%
 Test Distance: 26.000m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:93.7V I:0.0470A P:4.406W PF:1.0000 Freq:0Hz Lamp Flux:584.422x1 lm		
SGSO SKU: 0028920142	TYPE: /	WEIGHT: /
SPEC.:0.3m T5 Cabinet,5W,525lm,105lm/W,3CCT Switch,3000/3500/4000K,Linkable	DIM.: /	SERIAL No.:N21LEDGW1109001-07
MFR.: /	SUR.: /	Shielding Angle: /

Table--1

UNIT: cd

C(DEG) g (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	196	195	196	196	196	197	196	196	196	195	196	196	196	197	196	196			
5	196	194	195	194	195	195	195	195	197	196	196	196	197	196	196	196			
10	193	191	191	190	192	192	193	193	195	194	195	194	196	195	193	193			
15	189	187	186	186	186	187	189	189	193	192	192	193	193	192	191	189			
20	183	181	180	180	181	182	183	184	187	188	188	189	190	188	186	184			
25	176	174	173	172	173	175	177	178	182	182	182	183	184	183	179	177			
30	167	165	164	163	164	165	167	171	174	175	176	177	177	175	173	170			
35	157	155	153	153	155	156	158	162	165	166	168	168	169	167	163	160			
40	146	143	141	141	142	145	147	151	155	156	158	158	158	156	152	149			
45	134	131	128	128	129	132	134	138	143	144	147	147	147	146	141	137			
50	121	116	113	113	115	118	120	125	129	132	134	135	134	132	128	123			
55	105	101	98.1	97.7	98.6	102	105	110	114	118	120	120	121	118	113	108			
60	88.2	83.7	80.8	80.7	82.3	85.1	88.9	94.2	98.8	102	105	105	104	101	97.1	91.3			
65	70.6	66.8	63.4	63.3	64.5	67.9	71.6	77.4	81.5	85.9	88.5	89.3	88.7	85.1	80.4	74.0			
70	52.3	48.9	45.6	45.0	45.4	49.8	53.8	59.3	64.1	68.1	70.8	71.5	71.3	67.2	62.5	56.5			
75	34.4	31.0	28.0	27.5	10.6	31.8	35.9	41.2	45.8	50.3	52.8	53.4	14.9	49.0	43.9	38.3			
80	18.2	14.7	12.9	12.2	0.25	15.6	19.2	23.9	27.9	32.3	34.9	35.0	0.29	31.0	26.3	21.2			
85	5.37	3.09	2.50	1.82	2.53	3.65	6.59	9.54	12.5	16.1	17.9	18.7	11.5	14.9	11.2	7.81			
90	0.63	0.63	0.62	0.54	0.17	0.50	0.79	1.16	2.26	4.09	5.07	5.52	0.00	3.29	1.66	0.75			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.2DEG
 Operators:GHH
 Test Date:2021-12-30

g Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.404.6
 Humidity:46%
 Test Distance:26.000m [K=1.0000]
 Remarks: