


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:230.16V I:0.0247A P:4.0 W PF:0.7445 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:450 x1 lm		
NAME: 0017440229 SOLIS 4W 3000K 450LM	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: LIT by Cardi	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 112.5 lm/W			
MODEL		I _{max} (cd)	378.3	S/MH(C0/180)	0.96
NOMINAL POWER(W)		LOR(%)	100.0	S/MH(C90/270)	0.96
RATED VOLTAGE(V)		TOTAL FLUX(lm)	450	η UP,DN(C0-180)	0.0,50.8
NOMINAL FLUX(lm)	450	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,49.2
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	1.00
TEST VOLTAGE(V)		η down (%)	100.0	CIBSE SHR MAX	1.00

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

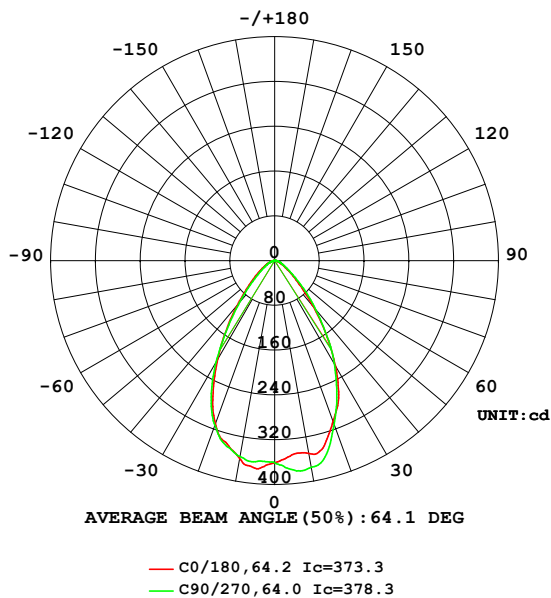

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

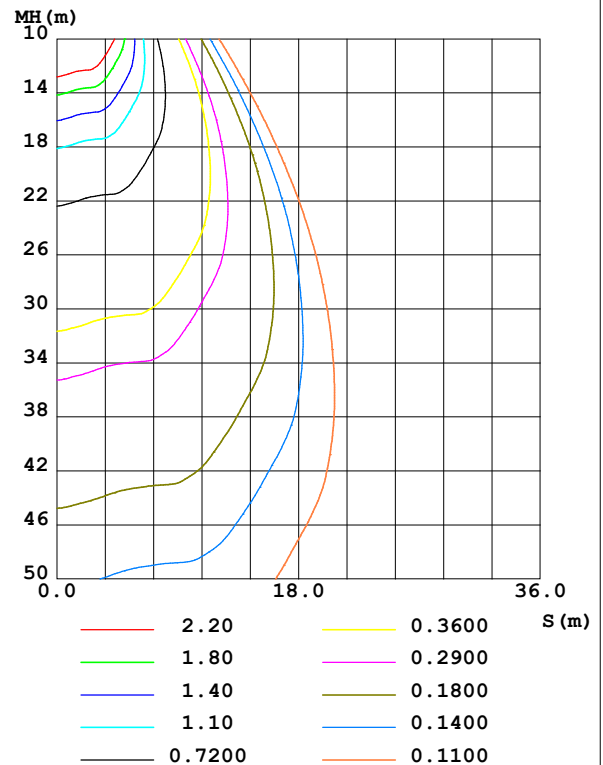

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25°C
 Operators:YHX
 Test Date:

Checker: YHX

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.456
 Humidity:55%
 Test Distance:1.160m [K=1.0000]
 Remarks:

Assessor: ZQQ

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C90	C180	C270					γ	Φ zone	Φ total	%lum, lamp
10	349.7	375.0	359.4	355.4					0- 10	34.64	34.64	7.63,7.63
20	305.6	311.0	309.9	313.0					10- 20	95.97	130.6	28.8,28.8
30	217.4	214.1	203.9	209.3					20- 30	120.8	251.4	55.4,55.4
40	108.7	114.4	104.0	98.14					30- 40	96.84	348.2	76.7,76.7
50	43.91	49.51	47.53	40.04					40- 50	54.90	403.1	88.8,88.8
60	18.03	22.02	21.96	18.87					50- 60	27.34	430.4	94.9,94.9
70	8.485	10.55	10.87	9.376					60- 70	14.21	444.6	98,98
80	2.983	4.061	4.701	3.855					70- 80	7.042	451.7	99.5,99.5
90	0	0.0097	0.3717	0					80- 90	1.908	453.6	100,100
100	0	0	0	0					90-100	0.0065	453.6	100,100
110	0	0	0	0					100-110	0	453.6	100,100
120	0	0	0	0					110-120	0	453.6	100,100
130	0.0100	0.0082	0.0053	0.0047					120-130	0.0007	453.6	100,100
140	0.0439	0.0414	0.0612	0.0625					130-140	0.0222	453.6	100,100
150	0.0821	0.0792	0.1141	0.1152					140-150	0.0467	453.7	100,100
160	0.1109	0.1090	0.1457	0.1458					150-160	0.0530	453.7	100,100
170	0.1014	0.1017	0.1338	0.1338					160-170	0.0362	453.8	100,100
180	0.0050	0.0044	0.0068	0.0081					170-180	0.0088	453.8	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 380.33 lm

%lum = 83.8%

%lamp = 83.8%

Conical surface Flux(120deg): 430.44 lm

%lum = 94.9%

%lamp = 94.9%

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25°C
Operators:YHX
Test Date:


Checker: YHX

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 γ Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.456
Humidity:55%
Test Distance:1.160m [K=1.0000]
Remarks:

Assessor: ZQQ

LUMINANCE LIMITATION CURVES

Test: U:230.16V I:0.0247A P:4.2239W PF:0.7445 Freq:49.99Hz UTHDi: 0.00% ITHDi: 0.00% KDisp: 0 Lamp Flux: 453.773x1 lm		
NAME: 0017440229 SOLIS 4W 3000K 450LM	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: KLITE	SUR.:	Shielding Angle:

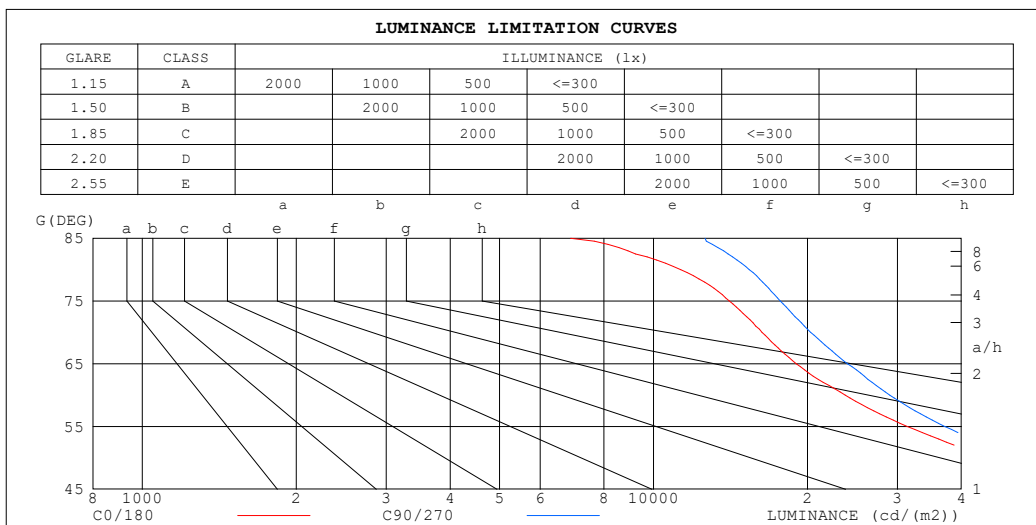

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	6881	12605
80	11296	15396
75	14073	17705
70	16312	20301
65	19011	23970
60	23713	28986
55	31365	37139
50	44915	50706
45	64040	72731

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25°C
Operators:YHX
Test Date:

Checker: YHX


γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.456
Humidity:55%
Test Distance:1.160m [K=1.0000]
Remarks:

Assessor: ZQQ

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:230.16V I:0.0247A P:4.2239W PF:0.7445 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:453.773x1 lm		
NAME: 0017440229 SOLIS 4W 3000K 450LM	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: KLITE	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.09	1.06	1.03	1.07	1.04	1.02	1.03	1.00	.98	.99	.97	.95	.95	.94	.93	.91
2.0	.99	.95	.90	.98	.93	.89	.94	.91	.87	.91	.88	.86	.88	.86	.84	.82
3.0	.91	.85	.80	.90	.84	.80	.87	.82	.78	.84	.80	.77	.82	.79	.76	.74
4.0	.84	.77	.72	.83	.76	.72	.80	.75	.71	.78	.74	.70	.76	.72	.69	.67
5.0	.77	.70	.65	.76	.70	.65	.74	.69	.64	.73	.68	.64	.71	.67	.63	.62
6.0	.72	.65	.60	.71	.64	.59	.69	.63	.59	.68	.63	.59	.66	.62	.58	.57
7.0	.67	.60	.55	.66	.59	.55	.64	.59	.54	.63	.58	.54	.62	.57	.54	.52
8.0	.62	.55	.51	.61	.55	.50	.60	.54	.50	.59	.54	.50	.58	.53	.50	.48
9.0	.58	.51	.47	.58	.51	.47	.57	.51	.47	.56	.50	.46	.55	.50	.46	.45
10.0	.55	.48	.44	.54	.48	.44	.53	.47	.43	.52	.47	.43	.52	.47	.43	.42

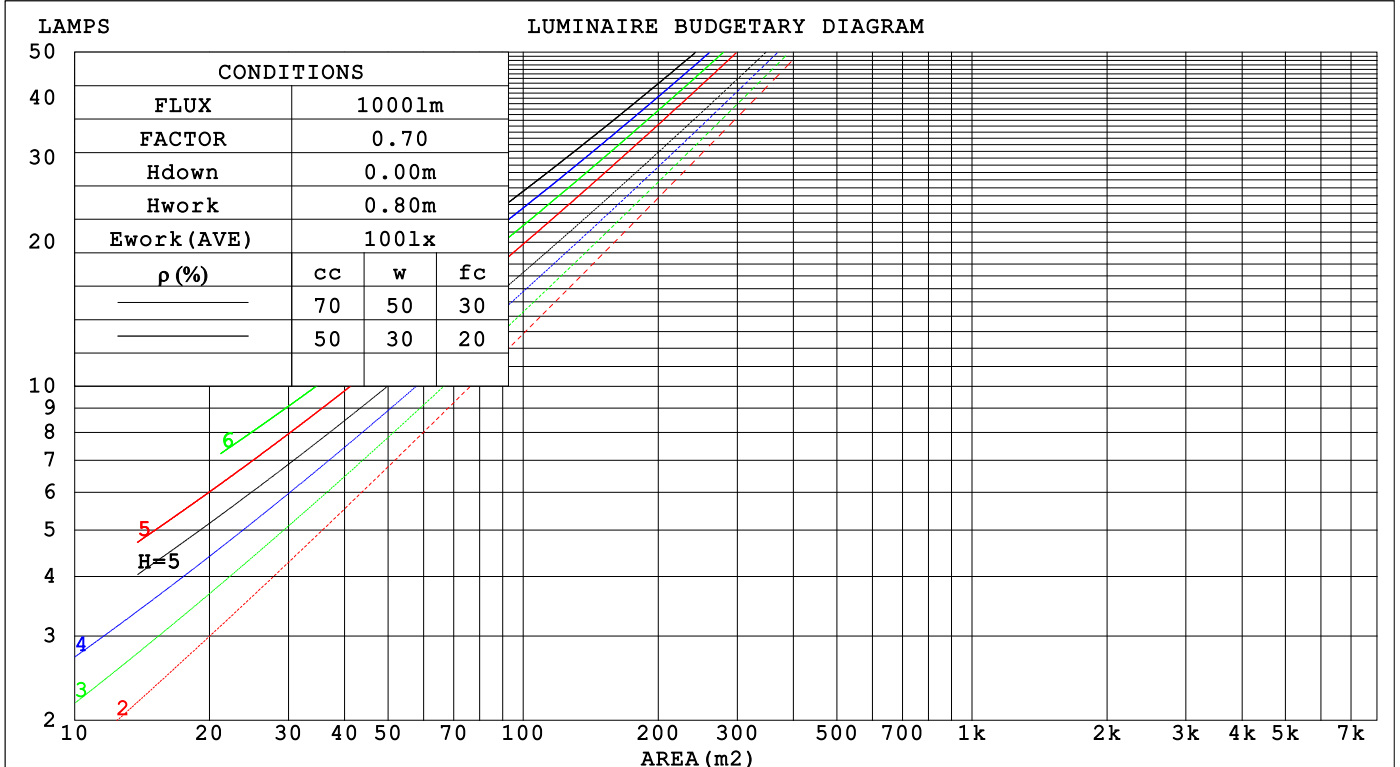

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25°C
Operators:YHX
Test Date:

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.456
Humidity:55%
Test Distance:1.160m [K=1.0000]
Remarks:

Checker: YHX

Assessor: ZQQ

WEC AND CCEC

Test:U:230.16V I:0.0247A P:4.2239W PF:0.7445 Freq:49.99Hz			UTHDi:0.00% ITHDi:0.00% KDisp:0			Lamp Flux:453.773x1 lm		
NAME: 0017440229 SOLIS 4W 3000K 450LM			TYPE:			WEIGHT:		
SPEC.:			DIM.:			SERIAL No.:		
MFR.: KLITE			SUR.:			Shielding Angle:		

pcc	80%			70%			50%			30%			10%			0														
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0														
pfc	20%			20%			20%			20%			20%			0														
RCR	RCR:Room Cavity Ratio															Wall Exitance Coefficients (WEC)														
0.0																														
1.0	.214	.122	.039	.207	.118	.038	.195	.112	.036	.183	.105	.034	.172	.100	.032															
2.0	.206	.113	.035	.200	.110	.034	.189	.105	.033	.179	.100	.031	.169	.096	.030															
3.0	.195	.104	.031	.190	.102	.031	.180	.098	.030	.172	.094	.029	.163	.091	.028															
4.0	.184	.096	.028	.180	.094	.028	.172	.091	.027	.164	.088	.027	.157	.085	.026															
5.0	.174	.089	.026	.170	.087	.025	.163	.085	.025	.156	.082	.025	.150	.080	.024															
6.0	.165	.083	.024	.161	.082	.023	.155	.079	.023	.149	.077	.023	.143	.075	.022															
7.0	.156	.077	.022	.153	.076	.022	.147	.075	.021	.142	.073	.021	.137	.071	.021															
8.0	.148	.072	.020	.146	.072	.020	.141	.070	.020	.136	.069	.020	.131	.067	.020															
9.0	.141	.068	.019	.139	.068	.019	.134	.066	.019	.130	.065	.019	.126	.064	.018															
10.0	.134	.064	.018	.132	.064	.018	.128	.063	.018	.124	.062	.018	.121	.061	.017															

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.191	.191	.191	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.174	.157	.142	.149	.135	.122	.102	.093	.085	.059	.054	.049	.019	.017	.016	
2.0	.161	.133	.109	.138	.114	.094	.095	.079	.066	.055	.046	.038	.017	.015	.013	
3.0	.150	.114	.085	.129	.098	.074	.088	.068	.052	.051	.040	.031	.016	.013	.010	
4.0	.141	.100	.068	.121	.086	.059	.083	.060	.042	.048	.035	.025	.016	.011	.008	
5.0	.133	.089	.056	.114	.077	.049	.079	.054	.034	.046	.031	.020	.015	.010	.007	
6.0	.126	.080	.046	.108	.069	.040	.075	.048	.029	.043	.028	.017	.014	.009	.006	
7.0	.120	.072	.039	.103	.063	.034	.071	.044	.024	.041	.026	.014	.013	.008	.005	
8.0	.114	.066	.034	.098	.058	.029	.068	.040	.021	.039	.024	.012	.013	.008	.004	
9.0	.109	.061	.029	.094	.053	.026	.065	.037	.018	.038	.022	.011	.012	.007	.004	
10.0	.104	.057	.026	.089	.050	.023	.062	.035	.016	.036	.021	.010	.012	.007	.003	

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25°C
Operators:YHX
Test Date:

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.456
Humidity:55%
Test Distance:1.160m [K=1.0000]
Remarks:

Checker: YHX

Assessor: ZQQ

UGR(Unified Glare Rating) Table

Test:U:230.16V I:0.0247A P:4.2239W PF:0.7445 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:453.773x1 lm										
NAME: 0017440229 SOLIS 4W 3000K 450LM					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: KLITE					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	26.4	27.5	26.6	27.7	27.9	26.8	27.9	27.0	28.1	28.3
3H	26.6	27.7	26.9	27.9	28.1	27.1	28.1	27.4	28.4	28.6
4H	26.7	27.7	27.0	27.9	28.1	27.2	28.2	27.5	28.4	28.7
6H	26.7	27.7	27.0	27.9	28.2	27.3	28.2	27.6	28.5	28.7
8H	26.7	27.6	27.0	27.9	28.1	27.3	28.2	27.6	28.5	28.8
12H	26.7	27.5	27.0	27.8	28.1	27.3	28.2	27.7	28.5	28.7
4H 2H	26.4	27.4	26.7	27.7	27.9	26.8	27.8	27.1	28.0	28.3
3H	26.8	27.6	27.1	27.9	28.2	27.2	28.1	27.6	28.4	28.7
4H	26.9	27.7	27.3	28.0	28.3	27.4	28.2	27.8	28.5	28.8
6H	27.0	27.7	27.4	28.1	28.4	27.6	28.3	28.0	28.6	29.0
8H	27.1	27.7	27.5	28.0	28.4	27.7	28.3	28.1	28.6	29.0
12H	27.0	27.6	27.5	28.0	28.4	27.7	28.3	28.1	28.6	29.0
8H 4H	27.0	27.6	27.4	28.0	28.3	27.4	28.1	27.8	28.4	28.8
6H	27.1	27.7	27.6	28.1	28.5	27.7	28.2	28.1	28.6	29.0
8H	27.2	27.6	27.6	28.1	28.5	27.8	28.2	28.2	28.6	29.1
12H	27.2	27.6	27.7	28.0	28.5	27.8	28.2	28.3	28.7	29.1
12H 4H	26.9	27.5	27.4	27.9	28.3	27.4	28.0	27.8	28.4	28.8
6H	27.1	27.6	27.6	28.0	28.4	27.7	28.1	28.1	28.5	29.0
8H	27.2	27.6	27.7	28.0	28.5	27.8	28.2	28.2	28.6	29.1
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 1.3 / - 1.9					+ 1.1 / - 1.6				
1.5H	+ 1.9 / - 1.5					+ 1.6 / - 1.4				
2.0H	+ 2.4 / - 1.6					+ 2.5 / - 1.6				

CIE Pub.117, 453.8 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -2.7)
Area: 0.00152 m2

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25°C
Operators:YHX
Test Date:

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.456
Humidity:55%
Test Distance:1.160m [K=1.0000]
Remarks:

Checker: YHX

Assessor: ZQQ

UTILIZATION FACTORS TABLE

Test:U:230.16V I:0.0247A P:4.2239W PF:0.7445 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:453.773x1 lm		
NAME: 0017440229 SOLIS 4W 3000K 450LM	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: KLITE	SUR.:	Shielding Angle:

REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	77	69	64	76	69	64	75	68	64	59
0.80	86	78	73	85	77	73	83	77	72	68
1.00	92	84	80	91	84	79	89	84	79	74
1.25	97	90	86	96	90	85	94	88	84	79
1.50	101	94	90	99	93	89	97	92	88	83
2.00	105	99	95	103	98	94	100	96	93	87
2.50	107	102	98	105	101	97	102	98	95	89
3.00	109	105	101	107	103	100	104	100	98	91
4.00	112	108	105	109	106	104	106	103	101	93
5.00	113	110	108	111	108	106	107	105	103	95
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature: 25°C
 Operators: YHX
 Test Date:


Checker: YHX

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.456
 Humidity: 55%
 Test Distance: 1.160m [K=1.0000]
 Remarks:

Assessor: ZQQ

ISOCANDELA DIAGRAM

Test:U:230.16V I:0.0247A P:4.2239W PF:0.7445 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:453.773x1 lm		
NAME: 0017440229 SOLIS 4W 3000K 450LM	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: KLITE	SUR.:	Shielding Angle:

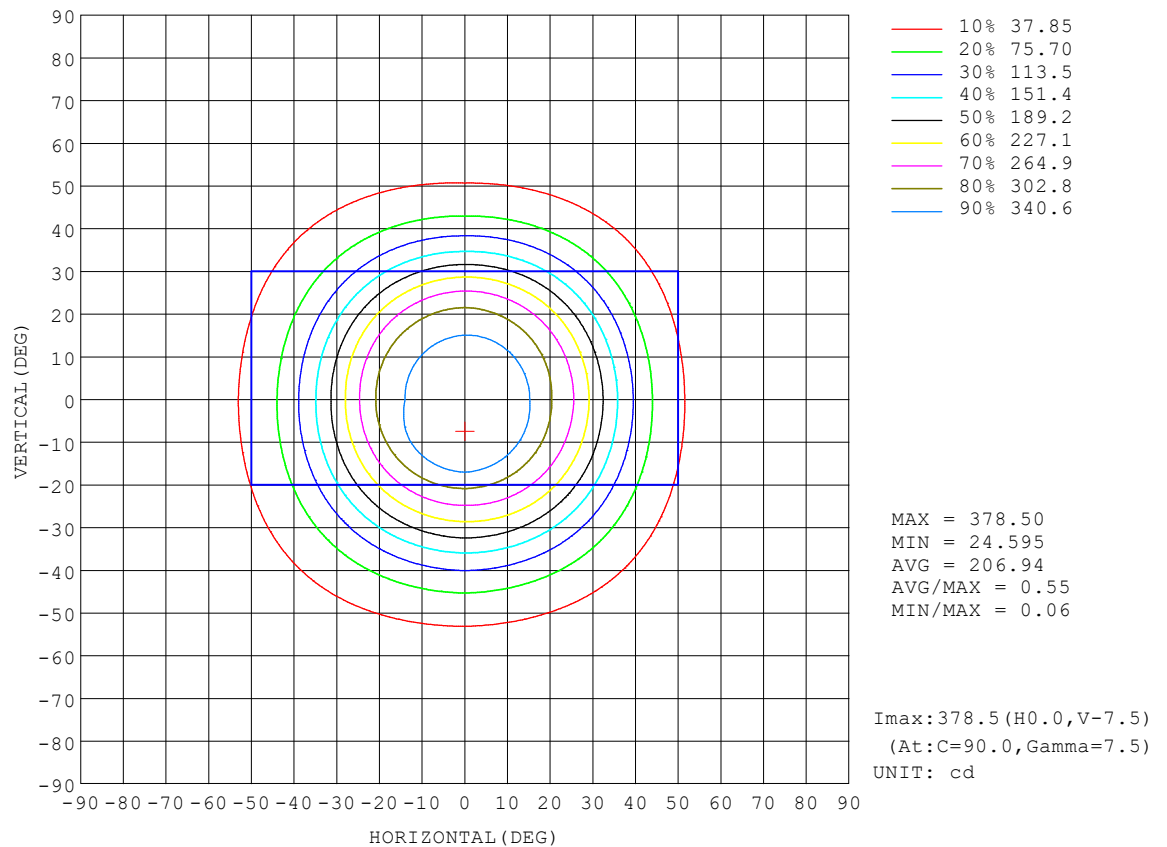

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25°C
 Operators:YHX
 Test Date:


Checker: YHX

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.456
 Humidity:55%
 Test Distance:1.160m [K=1.0000]
 Remarks:

Assessor: ZQQ

AAI Figure

Test:U:230.16V I:0.0247A P:4.2239W PF:0.7445 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:453.773x1 lm		
NAME: 0017440229 SOLIS 4W 3000K 450LM	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: KLITE	SUR.:	Shielding Angle:

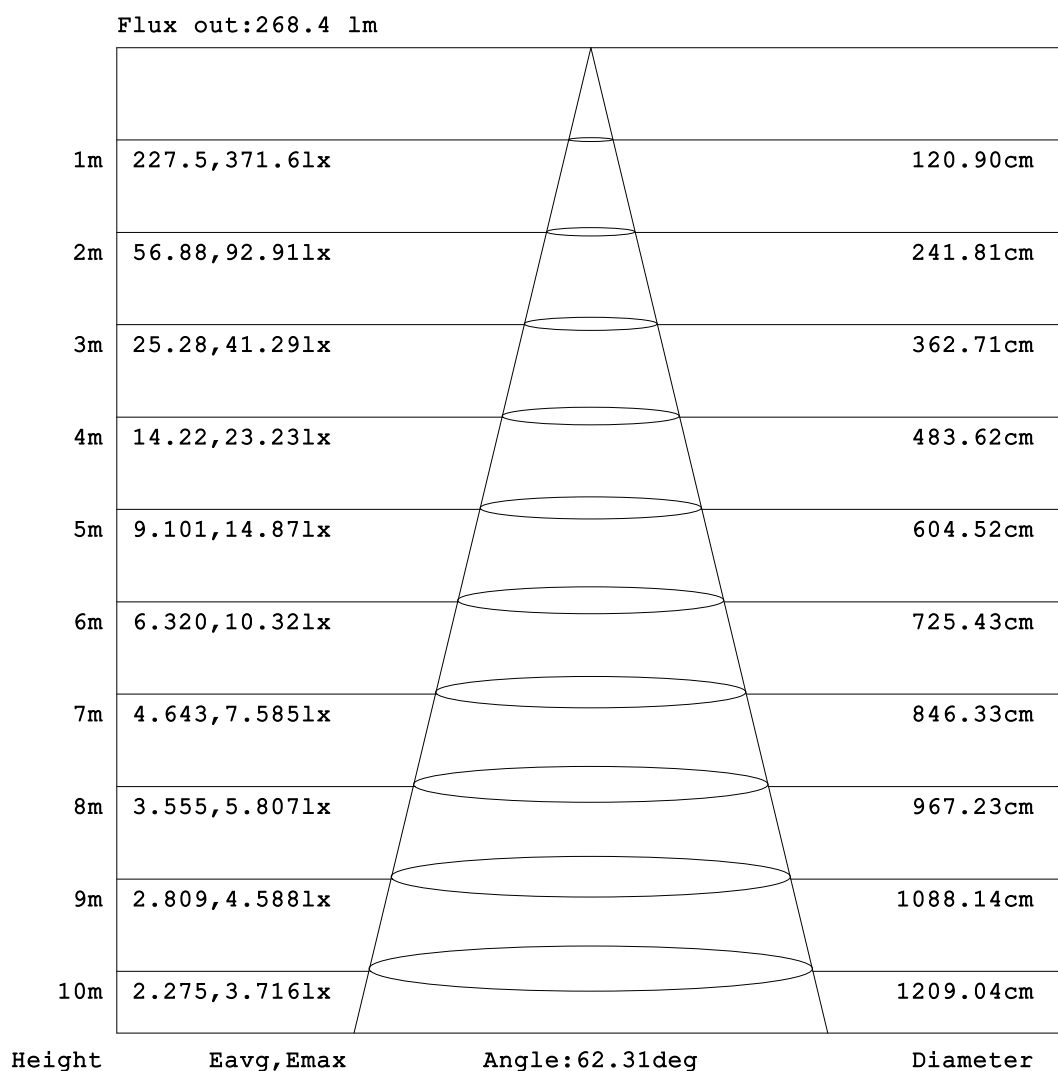

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature: 25°C
 Operators: YHX
 Test Date:


γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.456
 Humidity: 55%
 Test Distance: 1.160m [K=1.0000]
 Remarks:

Checker: YHX

Assessor: ZQQ

ISOLUX DIAGRAM

Test:U:230.16V I:0.0247A P:4.2239W PF:0.7445 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:453.773x1 lm		
NAME: 0017440229 SOLIS 4W 3000K 450LM	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: KLITE	SUR.:	Shielding Angle:

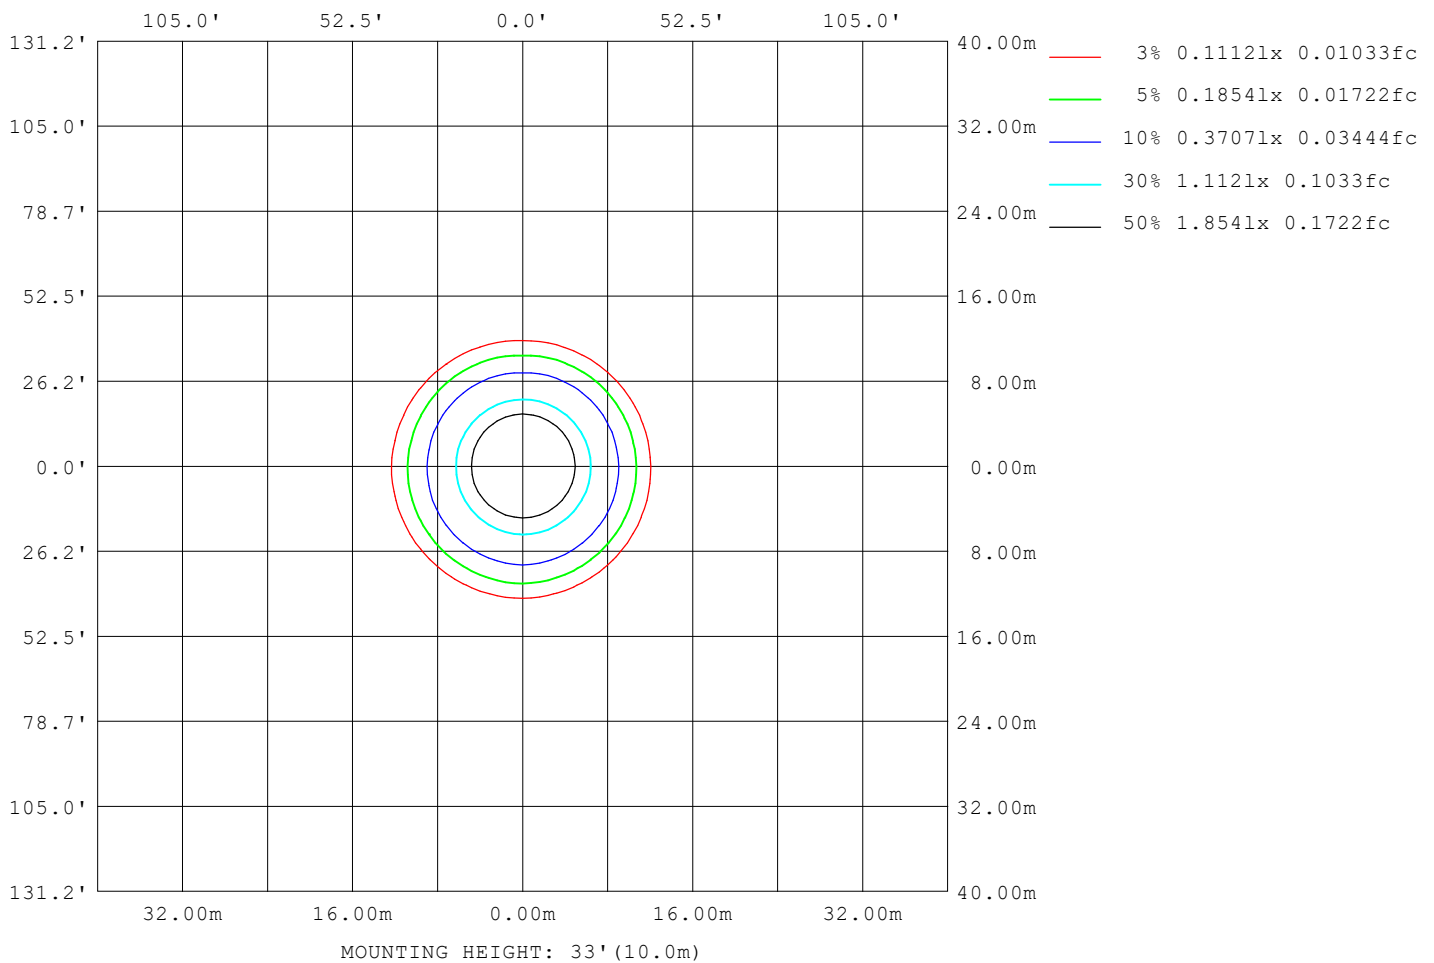

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25°C
Operators:YHX
Test Date:

Checker: YHX

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.456
Humidity:55%
Test Distance:1.160m [K=1.0000]
Remarks:

Assessor: ZQQ

LED Avg.L Report

Test:U:230.16V I:0.0247A P:4.2239W PF:0.7445 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:453.773x1 lm		
NAME: 0017440229 SOLIS 4W 3000K 450LM	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: KLITE	SUR.:	Shielding Angle:

AvgL	cd/m2
L_0~180 (65) av	21428
L_0~180 (75) av	16582
L_0~180 (85) av	12460
L_90~270 (65) av	22344
L_90~270 (75) av	16920
L_90~270 (85) av	12561
L_45 (65) av	22152
L_45 (75) av	16950
L_45 (85) av	12872

Standard: GB/T 29293-2012


C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25℃
 Operators:YHX
 Test Date:

Checker: YHX

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.456
 Humidity:55%
 Test Distance:1.160m [K=1.0000]
 Remarks:

Assessor: ZQQ

Planar Illuminance Curve

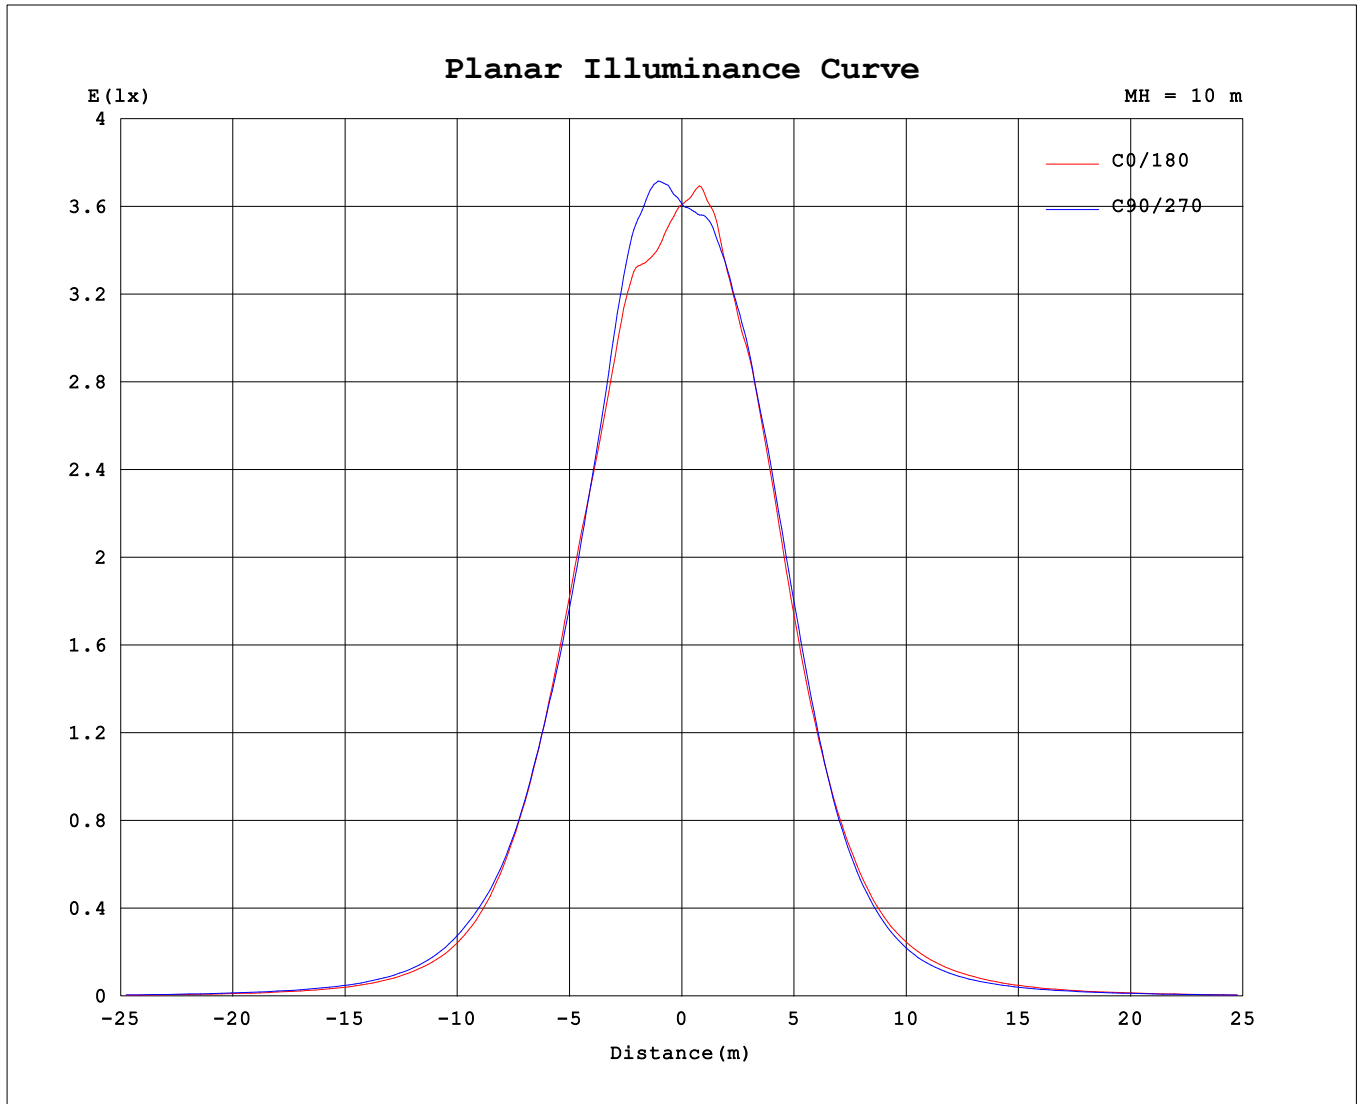

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature: 25°C
 Operators: YHX
 Test Date:

Checker: YHX

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.456
 Humidity: 55%
 Test Distance: 1.160m [K=1.0000]
 Remarks:

Assessor: ZQQ

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:230.16V I:0.0247A P:4.2239W PF:0.7445 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:453.773x1 lm		
NAME: 0017440229 SOLIS 4W 3000K 450LM	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: KLITE	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	90	180	270															
0	361	361	361	361															
5	349	375	373	360															
10	350	375	359	355															
15	343	358	336	341															
20	306	311	310	313															
25	270	263	261	269															
30	217	214	204	209															
35	161	162	150	147															
40	109	114	104	98.1															
45	68.9	78.1	69.9	62.2															
50	43.9	49.5	47.5	40.0															
55	27.4	32.4	32.4	26.6															
60	18.0	22.0	22.0	18.9															
65	12.2	15.4	15.3	13.3															
70	8.49	10.5	10.9	9.38															
75	5.54	6.96	7.51	6.35															
80	2.98	4.06	4.70	3.86															
85	0.91	1.67	2.39	1.66															
90	0.00	0.01	0.37	0.00															
95	0.00	0.00	0.00	0.00															
100	0.00	0.00	0.00	0.00															
105	0.00	0.00	0.00	0.00															
110	0.00	0.00	0.00	0.00															
115	0.00	0.00	0.00	0.00															
120	0.00	0.00	0.00	0.00															
125	0.00	0.00	0.00	0.00															
130	0.01	0.01	0.01	0.00															
135	0.03	0.02	0.03	0.03															
140	0.04	0.04	0.06	0.06															
145	0.06	0.06	0.09	0.09															
150	0.08	0.08	0.11	0.12															
155	0.10	0.10	0.14	0.14															
160	0.11	0.11	0.15	0.15															
165	0.11	0.11	0.15	0.15															
170	0.10	0.10	0.13	0.13															
175	0.06	0.07	0.10	0.10															
180	0.01	0.00	0.01	0.01															

C Range: 0 - 360DEG

C Interval: 90.0DEG

Test Speed: HIGH

Temperature:25°C

Operators:YHX

Test Date:

γ Range: 0 - 180DEG

γ Interval: 0.5DEG

Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.456

Humidity:55%

Test Distance:1.160m [K=1.0000]

Remarks:

Checker: YHX

Assessor: ZQQ