


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:230.18V I:0.0242A P:4.000 W PF:0.7390 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:450 x1 lm		
NAME: 0017440229 SOLIS 4W 4000K 450LM	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: LIT by Cardi	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 112.5 lm/W			
MODEL		Imax (cd)	460.0	S/MH(C0/180)	0.91
NOMINAL POWER(W)		LOR(%)	100.0	S/MH(C90/270)	0.90
RATED VOLTAGE(V)		TOTAL FLUX(lm)	450	η UP,DN(C0-180)	0.0,48.8
NOMINAL FLUX(lm)	450	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,51.2
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.75
TEST VOLTAGE(V)		η down (%)	100.0	CIBSE SHR MAX	0.95

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

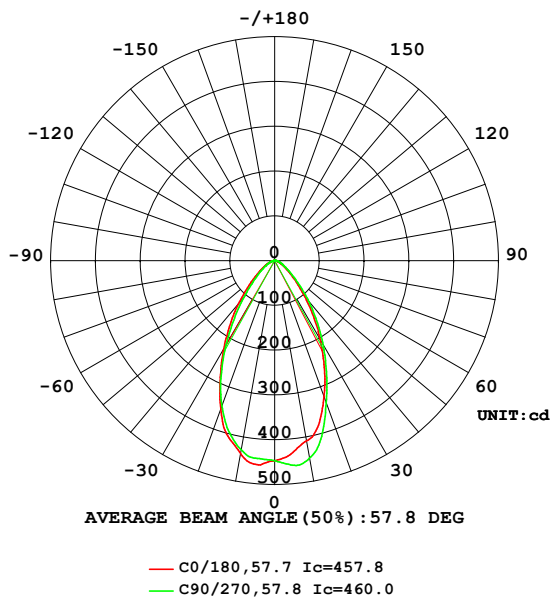

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

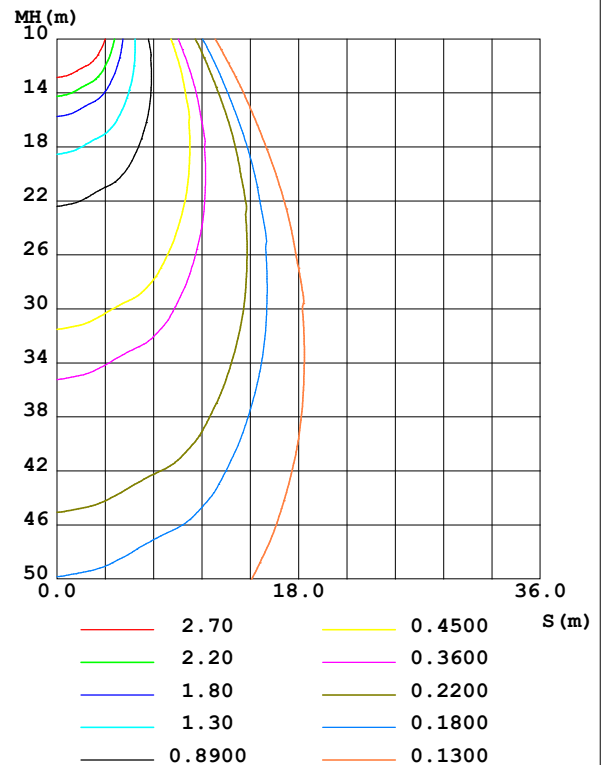

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature: 25°C
Operators: YHX
Test Date:

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.456
Humidity: 55%
Test Distance: 1.160m [K=1.0000]
Remarks:

Checker: YHX

Assessor: ZQQ

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C90	C180	C270					γ	Φ zone	Φ total	%lum, lamp
10	408.9	448.1	437.6	429.4					0- 10	42.23	42.23	8.45,8.45
20	323.2	337.3	352.7	344.8					10- 20	109.8	152.1	30.4,30.4
30	203.5	216.9	228.2	217.2					20- 30	126.7	278.7	55.8,55.8
40	104.7	118.6	126.1	107.3					30- 40	100.9	379.6	76,76
50	47.03	53.78	58.28	48.11					40- 50	60.39	440.0	88.1,88.1
60	21.33	25.45	27.29	23.27					50- 60	32.25	472.3	94.5,94.5
70	9.807	11.67	13.00	11.34					60- 70	16.97	489.2	97.9,97.9
80	3.319	4.111	5.201	4.482					70- 80	8.005	497.2	99.5,99.5
90	0	0	0.3444	0.0055					80- 90	2.063	499.3	100,100
100	0	0	0	0					90-100	0.0057	499.3	100,100
110	0	0	0	0					100-110	0	499.3	100,100
120	0	0	0	0					110-120	0	499.3	100,100
130	0.0219	0.0155	0.0077	0.0083					120-130	0.0025	499.3	100,100
140	0.0616	0.0540	0.0717	0.0726					130-140	0.0294	499.3	100,100
150	0.1052	0.0969	0.1354	0.1352					140-150	0.0570	499.4	100,100
160	0.1360	0.1300	0.1747	0.1744					150-160	0.0639	499.5	100,100
170	0.1209	0.1202	0.1634	0.1633					160-170	0.0436	499.5	100,100
180	0.0135	0.0098	0.0152	0.0167					170-180	0.0108	499.5	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 414.5 lm

%lum = 83.0%

%lamp = 83.0%

Conical surface Flux(120deg): 472.26 lm

%lum = 94.5%

%lamp = 94.5%

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25°C
 Operators:YHX
 Test Date:


Checker: YHX

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.456
 Humidity:55%
 Test Distance:1.160m [K=1.0000]
 Remarks:

Assessor: ZQQ

LUMINANCE LIMITATION CURVES

Test: U:230.18V I:0.0242A P:4.1107W PF:0.7390 Freq:49.99Hz UTHDi: 0.00% ITHDi: 0.00% KDisp: 0 Lamp Flux: 499.505x1 lm		
NAME: 0017440229 SOLIS 4W 4000K 450LM	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: KLITE	SUR.:	Shielding Angle:

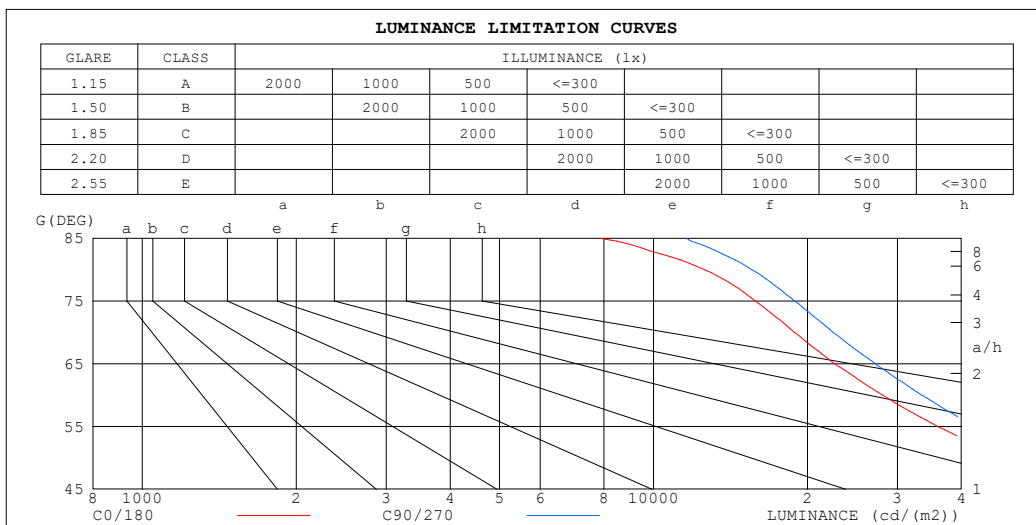

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	7860	11599
80	12576	15573
75	15824	18880
70	18865	22445
65	22622	27150
60	28070	33485
55	35994	42469
50	48143	55037
45	65289	75021

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25°C
Operators:YHX
Test Date:

Checker: YHX


γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.456
Humidity:55%
Test Distance:1.160m [K=1.0000]
Remarks:

Assessor: ZQQ

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:230.18V I:0.0242A P:4.1107W PF:0.7390 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:499.505x1 lm		
NAME: 0017440229 SOLIS 4W 4000K 450LM	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: KLITE	SUR.:	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.09	1.06	1.03	1.07	1.04	1.02	1.03	1.00	.98	.99	.97	.95	.95	.94	.93	.91
2.0	.99	.95	.90	.98	.93	.89	.94	.91	.87	.91	.88	.86	.88	.86	.84	.82
3.0	.91	.85	.80	.90	.84	.80	.87	.82	.78	.84	.80	.77	.82	.79	.76	.74
4.0	.84	.77	.72	.83	.77	.72	.80	.75	.71	.78	.74	.70	.76	.72	.69	.68
5.0	.77	.71	.66	.76	.70	.65	.75	.69	.65	.73	.68	.64	.71	.67	.63	.62
6.0	.72	.65	.60	.71	.64	.60	.69	.64	.59	.68	.63	.59	.66	.62	.58	.57
7.0	.67	.60	.55	.66	.60	.55	.65	.59	.55	.63	.58	.54	.62	.58	.54	.52
8.0	.62	.56	.51	.62	.55	.51	.61	.55	.51	.60	.54	.50	.58	.54	.50	.49
9.0	.58	.52	.47	.58	.52	.47	.57	.51	.47	.56	.51	.47	.55	.50	.47	.45
10.0	.55	.48	.44	.54	.48	.44	.54	.48	.44	.53	.48	.44	.52	.47	.44	.42

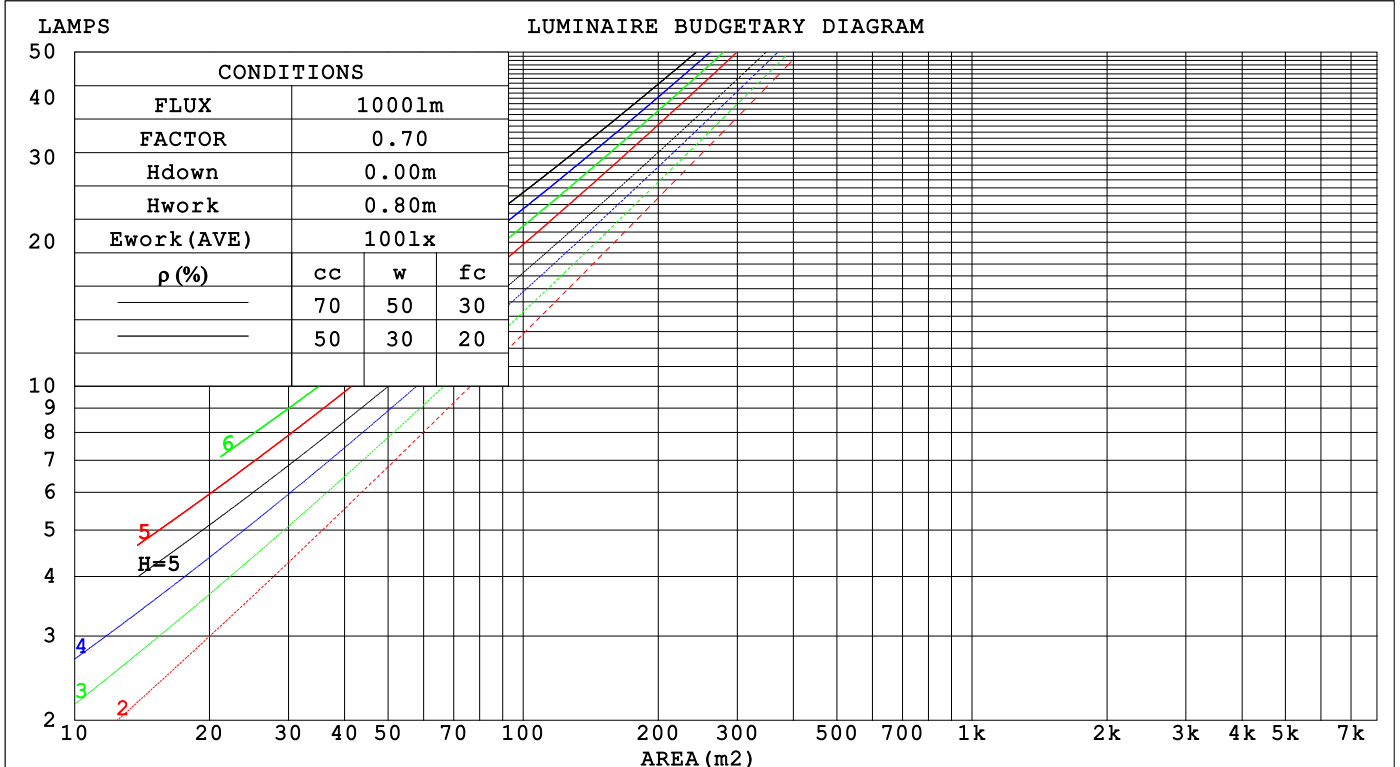

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25°C
Operators:YHX
Test Date:

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.456
Humidity:55%
Test Distance:1.160m [K=1.0000]
Remarks:

Checker: YHX

Assessor: ZQQ

WEC AND CCEC

Test:U:230.18V I:0.0242A P:4.1107W PF:0.7390 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:499.505x1 lm		
NAME: 0017440229 SOLIS 4W 4000K 450LM	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: KLITE	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0														
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0														
pfc	20%			20%			20%			20%			20%			0														
RCR	RCR:Room Cavity Ratio															Wall Exitance Coefficients(WEC)														
0.0																														
1.0	.214	.122	.039	.207	.118	.038	.195	.112	.036	.183	.106	.034	.172	.100	.032															
2.0	.206	.113	.035	.200	.110	.034	.189	.105	.033	.179	.100	.031	.169	.096	.030															
3.0	.195	.104	.031	.190	.102	.031	.180	.098	.030	.171	.094	.029	.163	.090	.028															
4.0	.184	.096	.028	.179	.094	.028	.171	.091	.027	.164	.088	.026	.156	.085	.026															
5.0	.174	.088	.026	.170	.087	.025	.163	.085	.025	.156	.082	.024	.149	.080	.024															
6.0	.164	.082	.024	.161	.081	.023	.154	.079	.023	.148	.077	.023	.143	.075	.022															
7.0	.156	.077	.022	.153	.076	.022	.147	.074	.021	.141	.073	.021	.136	.071	.021															
8.0	.148	.072	.020	.145	.071	.020	.140	.070	.020	.135	.068	.020	.130	.067	.020															
9.0	.140	.068	.019	.138	.067	.019	.133	.066	.019	.129	.065	.019	.125	.063	.018															
10.0	.134	.064	.018	.131	.063	.018	.127	.062	.018	.123	.061	.017	.120	.060	.017															

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.191	.191	.191	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.174	.157	.142	.149	.135	.122	.102	.093	.085	.059	.054	.049	.019	.017	.016	
2.0	.161	.133	.109	.138	.114	.094	.095	.079	.066	.055	.046	.038	.017	.015	.013	
3.0	.150	.114	.085	.129	.098	.074	.088	.068	.052	.051	.040	.031	.016	.013	.010	
4.0	.141	.100	.068	.121	.086	.059	.083	.060	.042	.048	.035	.025	.015	.011	.008	
5.0	.133	.089	.056	.114	.077	.049	.079	.054	.034	.046	.031	.020	.015	.010	.007	
6.0	.126	.080	.047	.108	.069	.041	.075	.048	.029	.043	.028	.017	.014	.009	.006	
7.0	.119	.072	.039	.103	.063	.034	.071	.044	.024	.041	.026	.014	.013	.008	.005	
8.0	.114	.066	.034	.098	.058	.030	.068	.040	.021	.039	.024	.012	.013	.008	.004	
9.0	.108	.061	.030	.093	.053	.026	.065	.037	.018	.038	.022	.011	.012	.007	.004	
10.0	.103	.057	.026	.089	.049	.023	.062	.035	.016	.036	.021	.010	.012	.007	.003	

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25°C
Operators:YHX
Test Date:

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.456
Humidity:55%
Test Distance:1.160m [K=1.0000]
Remarks:

Checker: YHX

Assessor: ZQQ

UGR(Unified Glare Rating) Table

Test:U:230.18V I:0.0242A P:4.1107W PF:0.7390 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:499.505x1 lm											
NAME: 0017440229 SOLIS 4W 4000K 450LM						TYPE:		WEIGHT:			
SPEC.:						DIM.:		SERIAL No.:			
MFR.: KLITE						SUR.:		Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	26.0	27.2	26.3	27.4	27.5	26.6	27.7	26.8	27.9	28.0	
	3H	26.3	27.4	26.6	27.6	27.8	26.9	28.0	27.2	28.2	28.4
	4H	26.5	27.4	26.7	27.7	27.9	27.0	28.0	27.3	28.3	28.5
	6H	26.5	27.4	26.8	27.7	27.9	27.1	28.0	27.4	28.3	28.5
	8H	26.5	27.4	26.8	27.6	27.9	27.1	28.0	27.4	28.3	28.5
	12H	26.5	27.3	26.8	27.6	27.9	27.1	28.0	27.4	28.2	28.5
4H 2H	26.2	27.1	26.4	27.4	27.6	26.6	27.6	26.9	27.8	28.1	
	3H	26.6	27.4	26.9	27.7	28.0	27.1	28.0	27.4	28.2	28.5
	4H	26.8	27.5	27.1	27.8	28.2	27.3	28.1	27.7	28.4	28.7
	6H	26.9	27.6	27.3	27.9	28.3	27.5	28.1	27.8	28.5	28.8
	8H	26.9	27.5	27.3	27.9	28.3	27.5	28.1	27.9	28.5	28.8
	12H	26.9	27.5	27.3	27.8	28.2	27.5	28.1	27.9	28.4	28.8
8H 4H	26.8	27.4	27.2	27.8	28.2	27.3	27.9	27.7	28.3	28.7	
	6H	27.0	27.5	27.4	27.9	28.3	27.5	28.0	28.0	28.4	28.9
	8H	27.0	27.5	27.5	27.9	28.3	27.6	28.0	28.0	28.5	28.9
	12H	27.0	27.4	27.5	27.9	28.3	27.6	28.0	28.1	28.5	28.9
12H 4H	26.8	27.3	27.2	27.7	28.1	27.3	27.9	27.7	28.2	28.6	
	6H	27.0	27.4	27.4	27.8	28.3	27.5	28.0	28.0	28.4	28.8
	8H	27.0	27.4	27.5	27.9	28.3	27.6	28.0	28.1	28.4	28.9
Variations with the observer position at spacings(CIE Pub.117):											
S = 1.0H	+ 1.1 / - 1.5					+ 1.0 / - 1.4					
1.5H	+ 1.4 / - 1.0					+ 1.4 / - 1.1					
2.0H	+ 2.0 / - 1.4					+ 2.1 / - 1.5					

CIE Pub.117, 499.5 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -2.4)
Area: 0.00152 m2

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25°C
Operators:YHX
Test Date:

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.456
Humidity:55%
Test Distance:1.160m [K=1.0000]
Remarks:

Checker: YHX

Assessor: ZQQ

UTILIZATION FACTORS TABLE

Test:U:230.18V I:0.0242A P:4.1107W PF:0.7390 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:499.505x1 lm		
NAME: 0017440229 SOLIS 4W 4000K 450LM	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: KLITE	SUR.:	Shielding Angle:

REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	76	68	63	76	68	63	75	68	63	58
0.80	85	77	72	84	77	72	83	76	72	67
1.00	91	84	79	90	84	79	89	84	78	73
1.25	97	90	85	96	89	85	93	88	84	79
1.50	100	94	89	99	93	89	96	92	88	82
2.00	104	99	95	103	98	94	100	96	92	86
2.50	107	102	98	105	100	97	102	98	95	88
3.00	109	104	101	107	103	100	103	100	98	91
4.00	111	108	105	109	106	103	105	103	101	93
5.00	113	110	107	111	108	106	107	105	103	95
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature: 25°C
 Operators: YHX
 Test Date:


Checker: YHX

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.456
 Humidity: 55%
 Test Distance: 1.160m [K=1.0000]
 Remarks:

Assessor: ZQQ

ISOCANDELA DIAGRAM

Test:U:230.18V I:0.0242A P:4.1107W PF:0.7390 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:499.505x1 lm		
NAME: 0017440229 SOLIS 4W 4000K 450LM	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: KLITE	SUR.:	Shielding Angle:

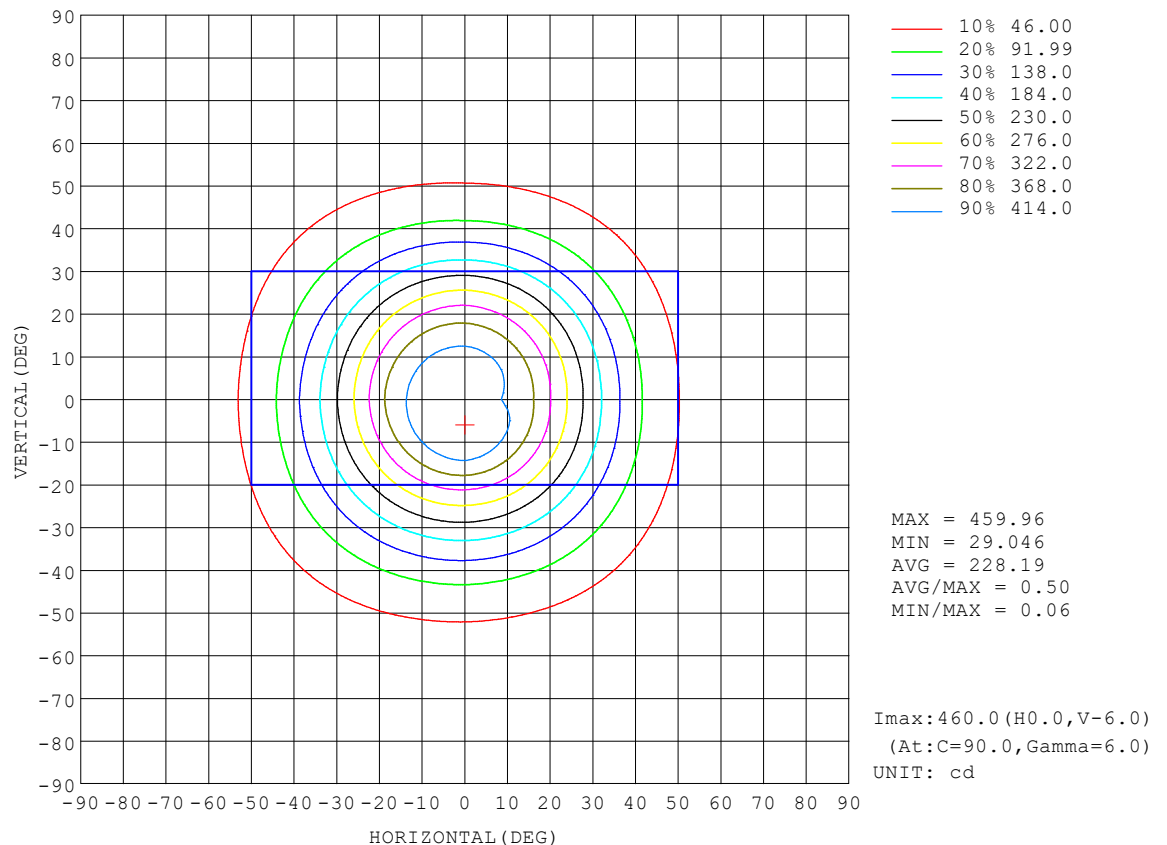

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25°C
Operators:YHX
Test Date:


Checker: YHX

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.456
Humidity:55%
Test Distance:1.160m [K=1.0000]
Remarks:

Assessor: ZQQ

AAI Figure

Test:U:230.18V I:0.0242A P:4.1107W PF:0.7390 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:499.505x1 lm		
NAME: 0017440229 SOLIS 4W 4000K 450LM	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: KLITE	SUR.:	Shielding Angle:

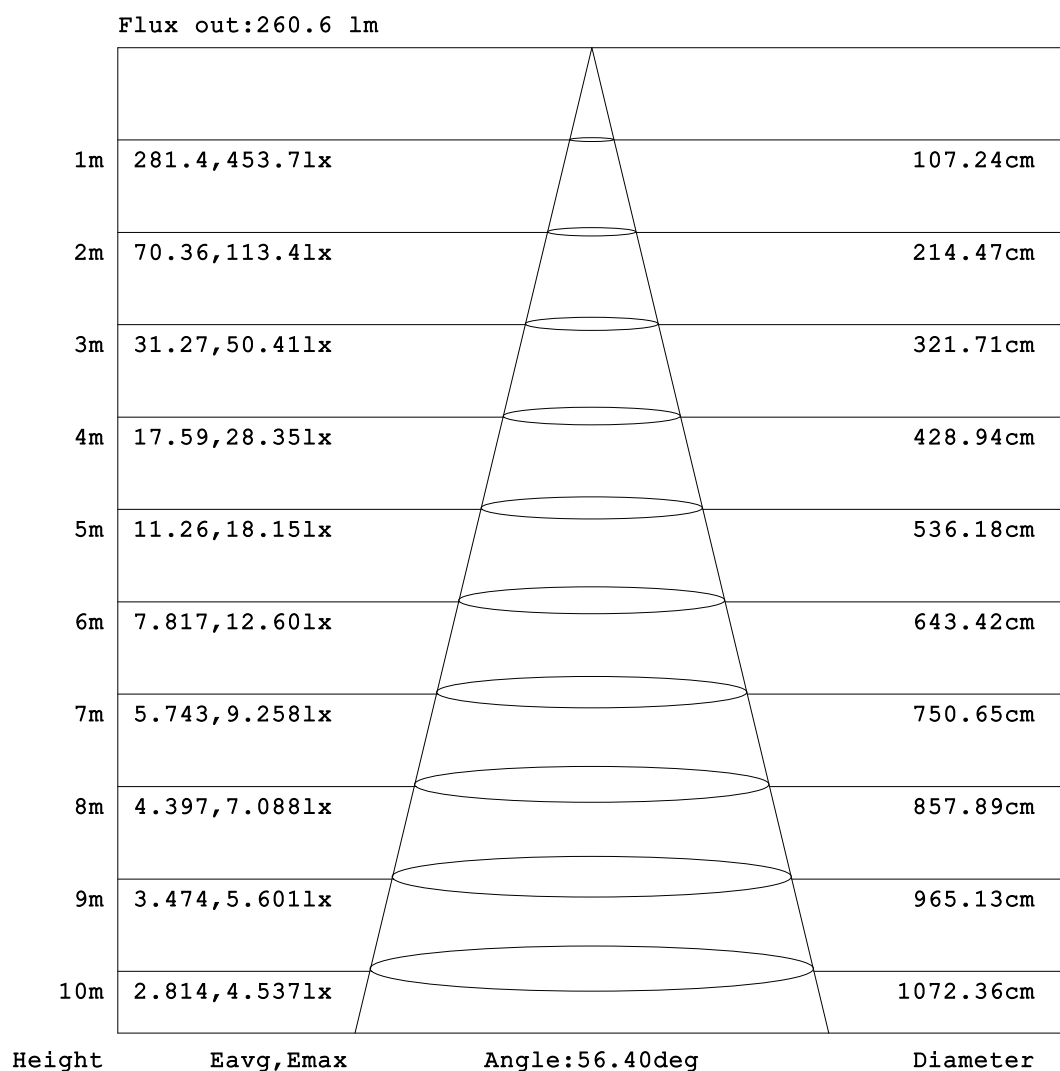

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature: 25°C
 Operators: YHX
 Test Date:


γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.456
 Humidity: 55%
 Test Distance: 1.160m [K=1.0000]
 Remarks:

Checker: YHX

Assessor: ZQQ

ISOLUX DIAGRAM

Test:U:230.18V I:0.0242A P:4.1107W PF:0.7390 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:499.505x1 lm		
NAME: 0017440229 SOLIS 4W 4000K 450LM	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: KLITE	SUR.:	Shielding Angle:

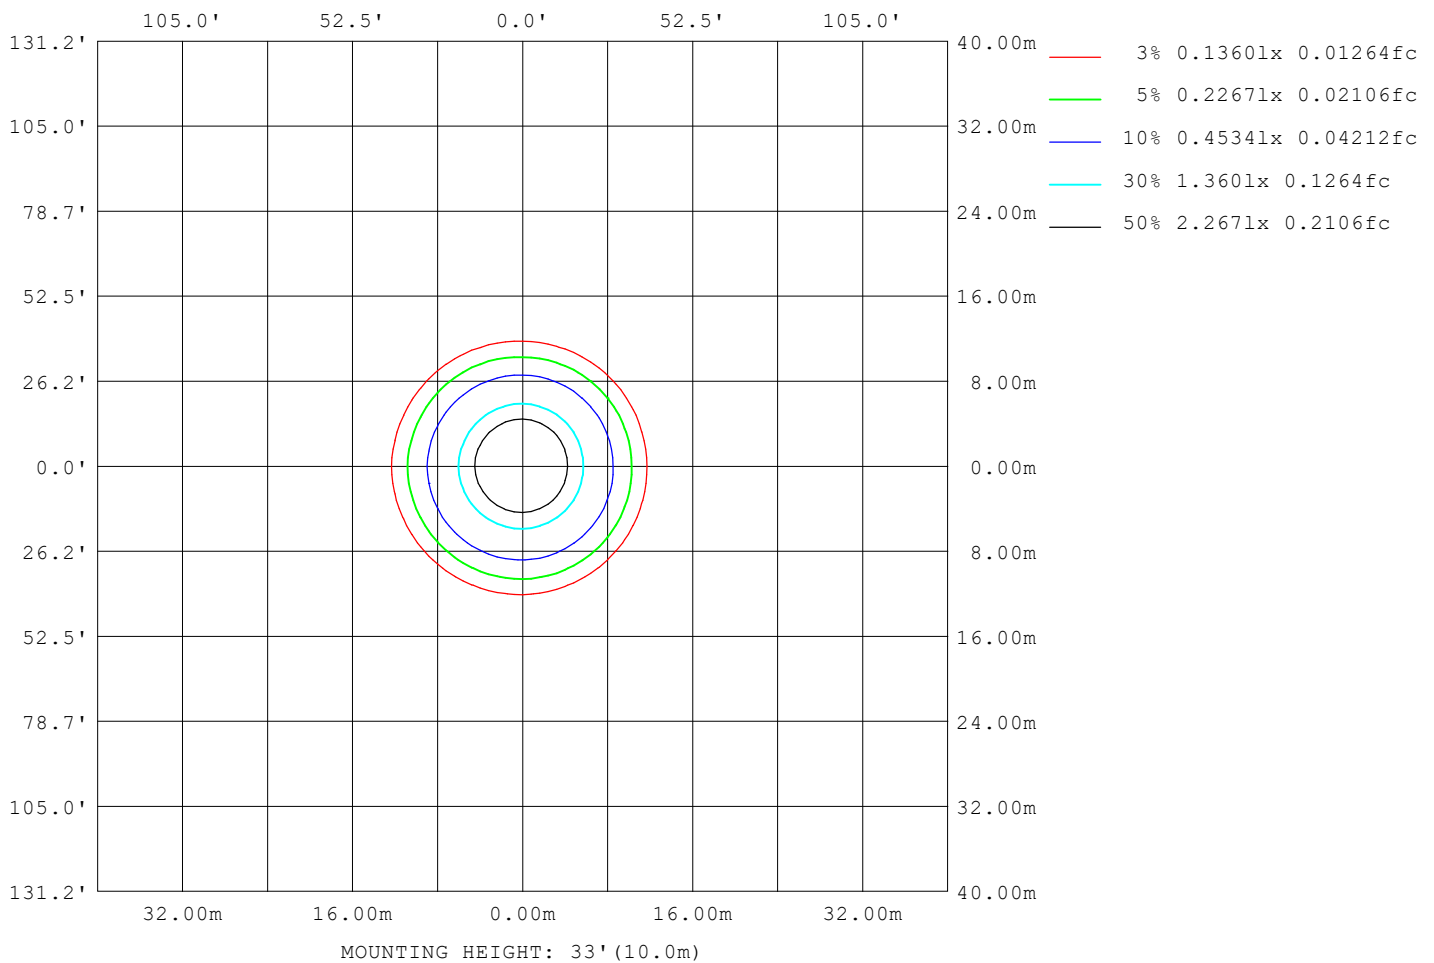

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25°C
Operators:YHX
Test Date:

Checker: YHX

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.456
Humidity:55%
Test Distance:1.160m [K=1.0000]
Remarks:

Assessor: ZQQ

LED Avg.L Report

Test:U:230.18V I:0.0242A P:4.1107W PF:0.7390 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:499.505x1 lm		
NAME: 0017440229 SOLIS 4W 4000K 450LM	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: KLITE	SUR.:	Shielding Angle:

AvgL	cd/m2
L_0~180 (65) av	26030
L_0~180 (75) av	18892
L_0~180 (85) av	13487
L_90~270 (65) av	26307
L_90~270 (75) av	19025
L_90~270 (85) av	13477
L_45 (65) av	26417
L_45 (75) av	19167
L_45 (85) av	13833

Standard: GB/T 29293-2012


C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25℃
Operators:YHX
Test Date:

Checker: YHX

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.456
Humidity:55%
Test Distance:1.160m [K=1.0000]
Remarks:

Assessor: ZQQ

Planar Illuminance Curve

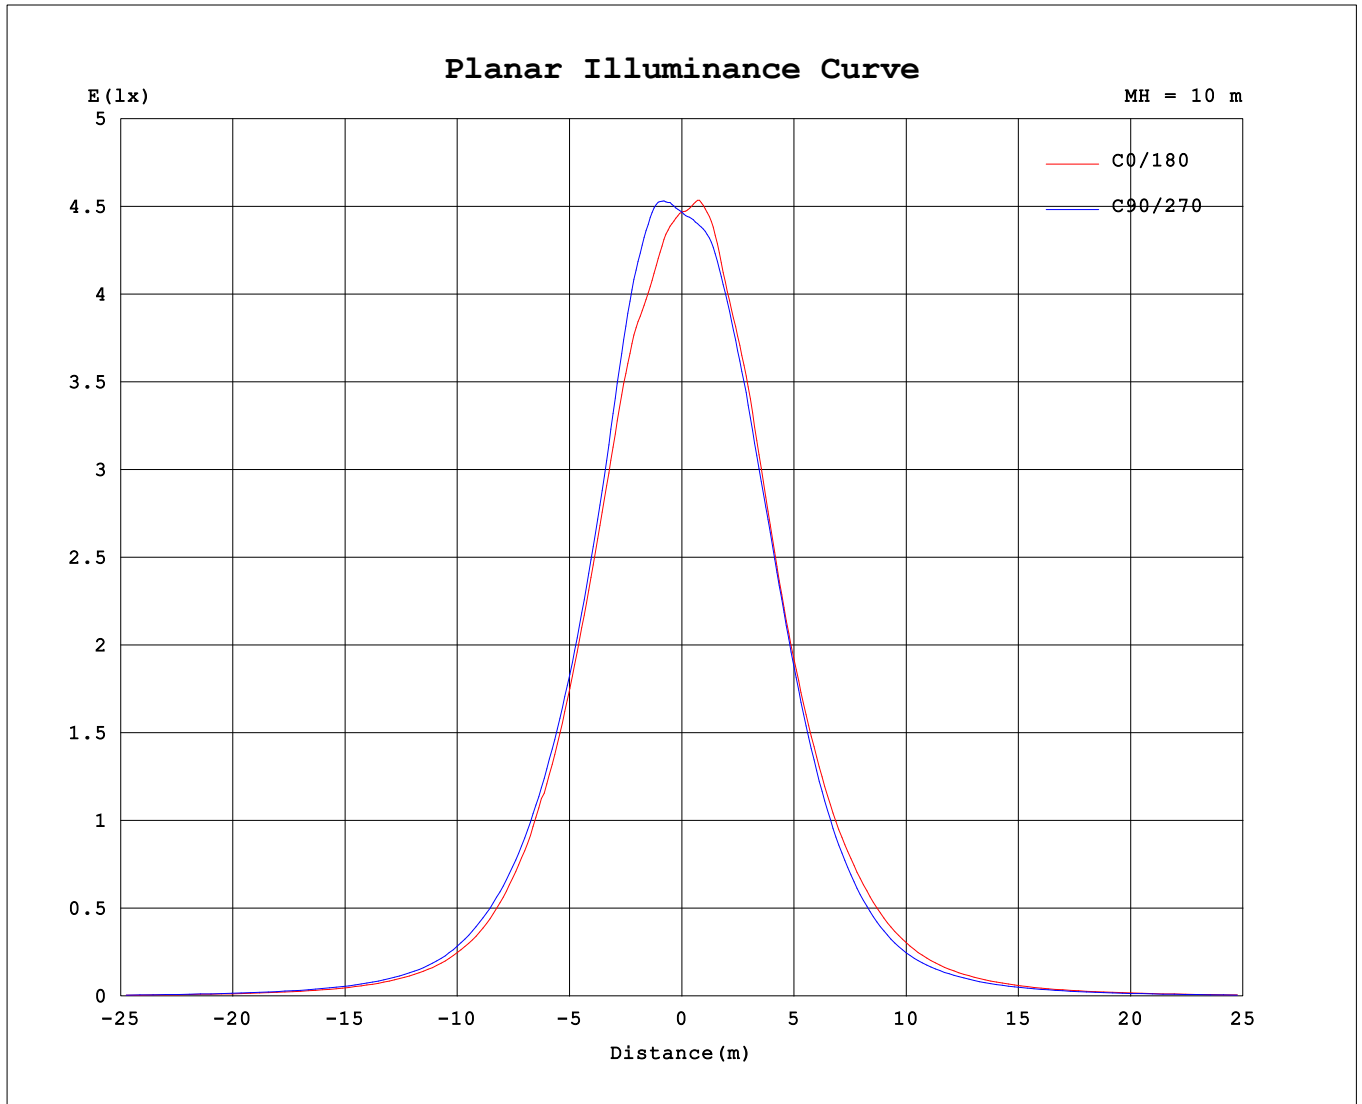

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature: 25°C
 Operators: YHX
 Test Date:

Checker: YHX

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.456
 Humidity: 55%
 Test Distance: 1.160m [K=1.0000]
 Remarks:

Assessor: ZQQ

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:230.18V I:0.0242A P:4.1107W PF:0.7390 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:499.505x1 lm		
NAME: 0017440229 SOLIS 4W 4000K 450LM	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: KLITE	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	90	180	270														
0	447	447	447	447														
5	432	458	457	443														
10	409	448	438	429														
15	380	406	405	395														
20	323	337	353	345														
25	263	274	288	284														
30	203	217	228	217														
35	151	164	173	157														
40	105	119	126	107														
45	70.2	80.6	86.2	70.1														
50	47.0	53.8	58.3	48.1														
55	31.4	37.0	39.8	33.0														
60	21.3	25.4	27.3	23.3														
65	14.5	17.4	18.9	16.4														
70	9.81	11.7	13.0	11.3														
75	6.22	7.43	8.64	7.54														
80	3.32	4.11	5.20	4.48														
85	1.04	1.54	2.53	2.03														
90	0.00	0.00	0.34	0.01														
95	0.00	0.00	0.00	0.00														
100	0.00	0.00	0.00	0.00														
105	0.00	0.00	0.00	0.00														
110	0.00	0.00	0.00	0.00														
115	0.00	0.00	0.00	0.00														
120	0.00	0.00	0.00	0.00														
125	0.00	0.00	0.00	0.00														
130	0.02	0.02	0.01	0.01														
135	0.04	0.03	0.04	0.04														
140	0.06	0.05	0.07	0.07														
145	0.08	0.08	0.10	0.10														
150	0.11	0.10	0.14	0.14														
155	0.12	0.12	0.16	0.16														
160	0.14	0.13	0.17	0.17														
165	0.14	0.13	0.18	0.18														
170	0.12	0.12	0.16	0.16														
175	0.08	0.08	0.12	0.12														
180	0.01	0.01	0.02	0.02														

C Range: 0 - 360DEG

C Interval: 90.0DEG

Test Speed: HIGH

Temperature:25℃

Operators:YHX

Test Date:

γ Range: 0 - 180DEG

γ Interval: 0.5DEG

Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.456

Humidity:55%

Test Distance:1.160m [K=1.0000]

Remarks:

Checker: YHX

Assessor: ZQQ