


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:230.10V I:0.0143A P:2.0W PF:0.6091 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:230 x1 lm		
NAME:PDF with rated value 0019590112 LAMP 2W 2700K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 115 lm/W			
MODEL		I _{max} (cd)	478.4	S/MH(C0/180)	0.48
NOMINAL POWER(W)	2	LOR(%)	100.0	S/MH(C90/270)	0.45
RATED VOLTAGE(V)	230	TOTAL FLUX(lm)	230	η UP,DN(C0-180)	0.6,57.3
NOMINAL FLUX(lm)	230	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.5,41.6
LAMPS INSIDE	1	η up (%)	1.1	CIBSE SHR NOM	0.50
TEST VOLTAGE(V)		η down (%)	98.9	CIBSE SHR MAX	0.60

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

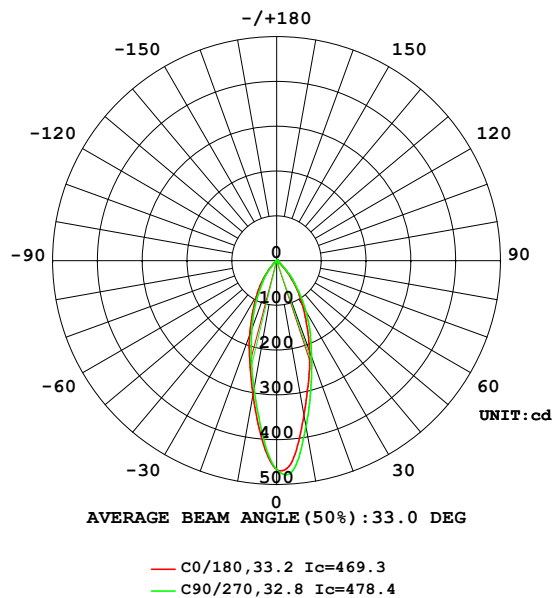

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

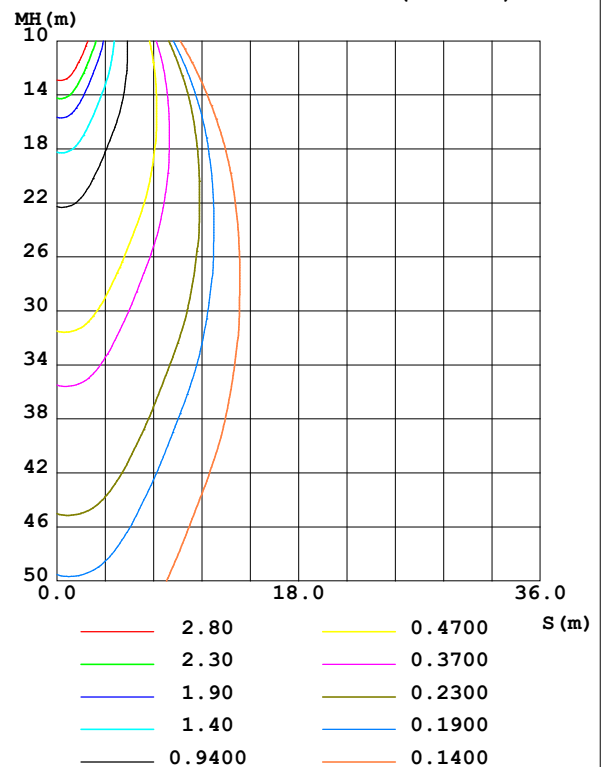

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25°C
Operators:YHX
Test Date:2025-09-09

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.456
Humidity:55%
Test Distance:1.160m [K=1.0000]
Remarks:

Checker: YHX

Assessor: ZQQ

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C90	C180	C270					γ	Φ zone	Φ total	%lum, lamp
10	351.8	377.1	304.7	291.5					0- 10	37.14	37.14	15.2,15.2
20	215.1	228.7	177.2	163.2					10- 20	71.34	108.5	44.3,44.3
30	116.9	132.2	89.96	76.52					20- 30	66.69	175.2	71.5,71.5
40	49.64	57.69	31.06	27.46					30- 40	43.53	218.7	89.3,89.3
50	9.613	8.902	5.462	4.533					40- 50	15.71	234.4	95.7,95.7
60	2.821	2.897	2.486	2.227					50- 60	3.732	238.1	97.2,97.2
70	1.611	1.677	1.496	1.393					60- 70	1.950	240.1	98,98
80	1.025	1.070	1.016	0.8769					70- 80	1.310	241.4	98.5,98.5
90	0.6381	0.6688	0.5234	0.4739					80- 90	0.8467	242.3	98.9,98.9
100	0.4906	0.4565	0.4591	0.4246					90-100	0.5158	242.8	99.1,99.1
110	0.5110	0.4754	0.4442	0.4413					100-110	0.4945	243.3	99.3,99.3
120	0.5653	0.4893	0.4891	0.4514					110-120	0.5005	243.8	99.5,99.5
130	0.4291	0.4509	0.3955	0.3786					120-130	0.3960	244.2	99.7,99.7
140	0.3525	0.3991	0.3426	0.3390					130-140	0.3074	244.5	99.8,99.8
150	0.3228	0.3648	0.3670	0.3694					140-150	0.2207	244.7	99.9,99.9
160	0.3381	0.3849	0.3906	0.3859					150-160	0.1721	244.9	100,100
170	0.1645	0.2516	0.1978	0.1953					160-170	0.0930	245.0	100,100
180	0	0	0	0					170-180	0.0075	245.0	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 229.56 lm

%lum = 93.7%

%lamp = 93.7%

Conical surface Flux(120deg): 238.15 lm

%lum = 97.2%

%lamp = 97.2%

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25°C
 Operators:YHX
 Test Date:2025-09-09


γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.456
 Humidity:55%
 Test Distance:1.160m [K=1.0000]
 Remarks:

Checker: YHX

Assessor: ZQQ

LUMINANCE LIMITATION CURVES

Test: U:230.10V I:0.0143A P:2.0057W PF:0.6091 Freq:49.99Hz UTHDi: 0.00% ITHDi: 0.00% KDisp: 0 Lamp Flux: 244.963x1 lm		
NAME: GU10-9D 2W 2700K 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: KLITE	SUR.:	Shielding Angle:

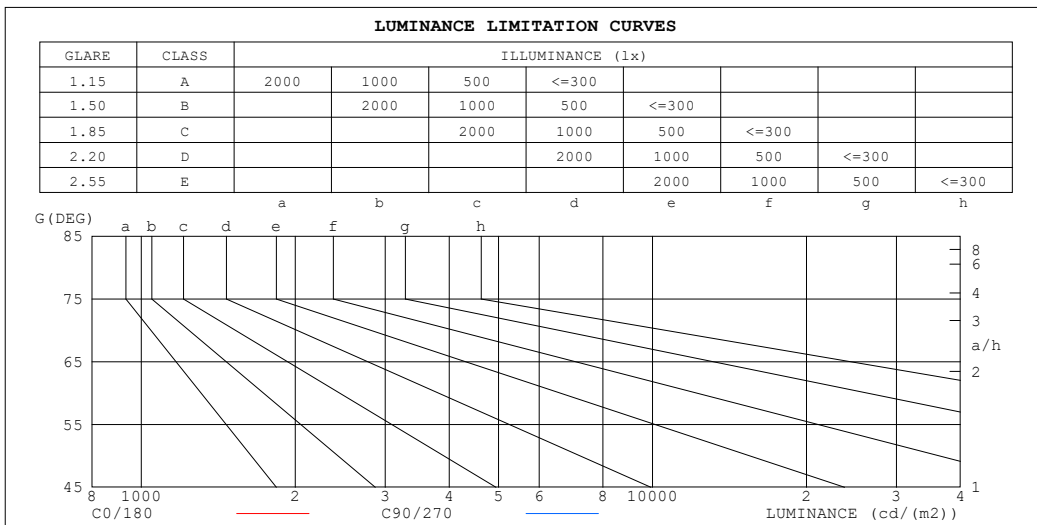

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	90	100
80	59	62
75	50	51
70	47	49
65	47	48
60	56	58
55	81	78
50	149	139
45	338	426

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25°C
Operators:YHX
Test Date:2025-09-09

Checker: YHX


γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.456
Humidity:55%
Test Distance:1.160m [K=1.0000]
Remarks:

Assessor: ZQQ

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:230.10V I:0.0143A P:2.0057W PF:0.6091 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:244.963x1 lm		
NAME: GU10-9D 2W 2700K 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: KLITE	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.10	1.10	1.10	1.06	1.06	1.06	1.01	1.01	1.01	.99
1.0	1.10	1.08	1.06	1.08	1.06	1.04	1.04	1.02	1.00	.00	.99	.97	.96	.95	.94	.92
2.0	1.03	.99	.95	1.01	.97	.94	.98	.95	.92	.94	.92	.90	.91	.90	.88	.86
3.0	.96	.91	.87	.95	.90	.86	.92	.88	.85	.89	.86	.83	.87	.84	.82	.80
4.0	.90	.84	.80	.89	.84	.80	.86	.82	.79	.84	.81	.78	.82	.79	.77	.75
5.0	.84	.79	.75	.83	.78	.74	.82	.77	.73	.80	.76	.73	.78	.75	.72	.70
6.0	.80	.74	.70	.79	.73	.69	.77	.72	.69	.76	.71	.68	.74	.71	.68	.66
7.0	.75	.69	.65	.74	.69	.65	.73	.68	.65	.72	.67	.64	.71	.67	.64	.62
8.0	.71	.65	.61	.71	.65	.61	.69	.64	.61	.68	.64	.61	.67	.63	.60	.59
9.0	.68	.62	.58	.67	.62	.58	.66	.61	.58	.65	.61	.57	.64	.60	.57	.56
10.0	.64	.59	.55	.64	.58	.55	.63	.58	.55	.62	.58	.54	.61	.57	.54	.53

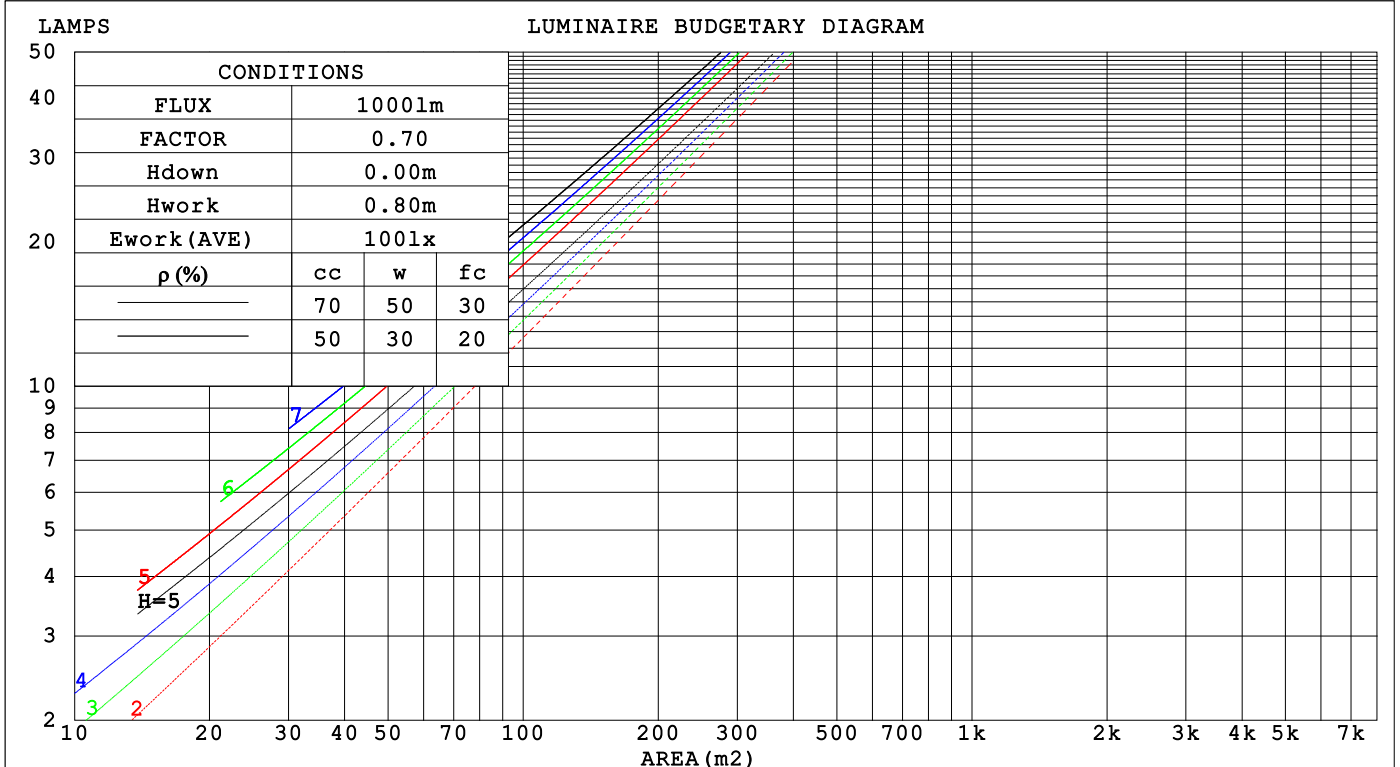

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25°C
Operators:YHX
Test Date:2025-09-09

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.456
Humidity:55%
Test Distance:1.160m [K=1.0000]
Remarks:

Checker: YHX

Assessor: ZQQ

WEC AND CCEC

Test:U:230.10V I:0.0143A P:2.0057W PF:0.6091 Freq:49.99Hz			UTHDi:0.00% ITHDi:0.00% KDisp:0			Lamp Flux:244.963x1 lm		
NAME: GU10-9D 2W 2700K 36D			TYPE:			WEIGHT:		
SPEC.:			DIM.:			SERIAL No.:		
MFR.: KLITE			SUR.:			Shielding Angle:		

pcc	80%			70%			50%			30%			10%			0														
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0														
pfc	20%			20%			20%			20%			20%			0														
RCR	RCR:Room Cavity Ratio															Wall Exitance Coefficients(WEC)														
0.0																														
1.0	.181	.103	.033	.174	.099	.031	.160	.092	.029	.148	.085	.027	.137	.079	.026															
2.0	.171	.094	.029	.165	.091	.028	.154	.086	.027	.144	.081	.025	.134	.076	.024															
3.0	.162	.086	.026	.157	.084	.025	.147	.080	.024	.138	.076	.023	.130	.072	.022															
4.0	.153	.080	.023	.149	.078	.023	.141	.075	.022	.133	.071	.022	.126	.068	.021															
5.0	.145	.074	.021	.142	.073	.021	.134	.070	.021	.128	.067	.020	.121	.065	.019															
6.0	.138	.069	.020	.135	.068	.020	.128	.066	.019	.123	.064	.019	.117	.062	.018															
7.0	.132	.065	.018	.129	.064	.018	.123	.062	.018	.118	.060	.018	.113	.059	.017															
8.0	.126	.061	.017	.123	.061	.017	.118	.059	.017	.113	.057	.017	.109	.056	.016															
9.0	.120	.058	.016	.118	.057	.016	.113	.056	.016	.109	.055	.016	.105	.053	.015															
10.0	.115	.055	.015	.113	.055	.015	.109	.053	.015	.105	.052	.015	.101	.051	.015															

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.199	.199	.199	.170	.170	.170	.116	.116	.116	.067	.067	.067	.021	.021	.021	
1.0	.180	.166	.153	.154	.142	.132	.105	.098	.091	.061	.057	.053	.019	.018	.017	
2.0	.165	.141	.121	.141	.121	.105	.097	.084	.073	.056	.049	.043	.018	.016	.014	
3.0	.152	.122	.098	.131	.105	.085	.090	.073	.060	.052	.043	.035	.017	.014	.012	
4.0	.142	.107	.081	.122	.093	.071	.084	.065	.050	.048	.038	.029	.016	.012	.010	
5.0	.133	.096	.068	.114	.083	.060	.079	.058	.042	.046	.034	.025	.015	.011	.008	
6.0	.125	.087	.059	.108	.075	.051	.074	.052	.036	.043	.031	.021	.014	.010	.007	
7.0	.119	.079	.051	.102	.068	.045	.071	.048	.032	.041	.028	.019	.013	.009	.006	
8.0	.113	.073	.045	.097	.063	.039	.067	.044	.028	.039	.026	.017	.013	.009	.005	
9.0	.108	.067	.040	.093	.059	.035	.064	.041	.025	.037	.024	.015	.012	.008	.005	
10.0	.103	.063	.036	.089	.055	.032	.062	.039	.023	.036	.023	.013	.012	.007	.004	

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25°C
Operators:YHX
Test Date:2025-09-09

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.456
Humidity:55%
Test Distance:1.160m [K=1.0000]
Remarks:

Checker: YHX

Assessor: ZQQ

UGR(Unified Glare Rating) Table

Test:U:230.10V I:0.0143A P:2.0057W PF:0.6091 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:244.963x1 lm										
NAME: GU10-9D 2W 2700K 36D					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: KLITE					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	9.4	10.3	9.6	10.5	10.7	9.9	10.8	10.1	11.0	11.2
3H	9.3	10.2	9.6	10.4	10.6	9.8	10.7	10.1	10.9	11.1
4H	9.3	10.1	9.6	10.3	10.6	9.8	10.6	10.1	10.8	11.1
6H	9.3	10.0	9.6	10.3	10.6	9.8	10.5	10.1	10.8	11.0
8H	9.3	10.0	9.6	10.3	10.6	9.8	10.5	10.1	10.8	11.1
12H	9.3	10.0	9.7	10.3	10.6	9.8	10.5	10.1	10.8	11.1
4H 2H	9.2	10.0	9.5	10.2	10.5	9.7	10.5	10.0	10.7	11.0
3H	9.1	9.8	9.5	10.1	10.4	9.6	10.3	10.0	10.6	10.9
4H	9.1	9.8	9.5	10.1	10.4	9.6	10.2	10.0	10.6	10.9
6H	9.2	9.7	9.6	10.1	10.5	9.7	10.2	10.0	10.6	10.9
8H	9.2	9.8	9.7	10.1	10.5	9.7	10.2	10.1	10.6	11.0
12H	9.3	9.8	9.7	10.2	10.6	9.8	10.2	10.2	10.6	11.1
8H 4H	9.1	9.6	9.5	9.9	10.3	9.5	10.0	9.9	10.4	10.8
6H	9.2	9.6	9.6	10.0	10.4	9.6	10.0	10.1	10.4	10.9
8H	9.3	9.6	9.7	10.1	10.5	9.7	10.1	10.2	10.5	11.0
12H	9.4	9.8	9.9	10.2	10.7	9.9	10.2	10.4	10.7	11.1
12H 4H	9.0	9.5	9.4	9.9	10.3	9.5	10.0	9.9	10.3	10.8
6H	9.2	9.5	9.6	10.0	10.4	9.6	10.0	10.1	10.4	10.9
8H	9.3	9.6	9.8	10.1	10.6	9.7	10.0	10.2	10.5	11.0
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 2.1 / - 4.9					+ 2.3 / - 5.2				
1.5H	+ 4.0 / - 4.8					+ 4.1 / - 5.2				
2.0H	+ 4.6 / - 2.1					+ 5.6 / - 2.4				

CIE Pub.117, 245.0 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -4.9)
Area: 0.1 m2

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25°C
Operators:YHX
Test Date:2025-09-09

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.456
Humidity:55%
Test Distance:1.160m [K=1.0000]
Remarks:

Checker: YHX

Assessor: ZQQ

UTILIZATION FACTORS TABLE

Test:U:230.10V I:0.0143A P:2.0057W PF:0.6091 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:244.963x1 lm		
NAME: GU10-9D 2W 2700K 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: KLITE	SUR.:	Shielding Angle:

REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	85	78	74	84	78	74	83	78	74	70
0.80	93	86	82	92	86	82	91	85	82	78
1.00	97	91	87	96	91	87	95	91	87	82
1.25	102	96	92	100	95	92	98	94	91	87
1.50	104	99	96	103	99	95	101	97	94	89
2.00	107	103	99	106	102	99	103	100	97	91
2.50	109	105	102	107	104	101	104	101	99	93
3.00	111	107	104	109	106	103	105	103	101	94
4.00	113	110	108	111	108	106	107	105	103	96
5.00	114	112	110	112	110	108	108	106	105	97
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25°C
Operators:YHX
Test Date:2025-09-09


Checker: YHX

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.456
Humidity:55%
Test Distance:1.160m [K=1.0000]
Remarks:

Assessor: ZQQ

ISOCANDELA DIAGRAM

Test:U:230.10V I:0.0143A P:2.0057W PF:0.6091 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:244.963x1 lm		
NAME: GU10-9D 2W 2700K 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: KLITE	SUR.:	Shielding Angle:

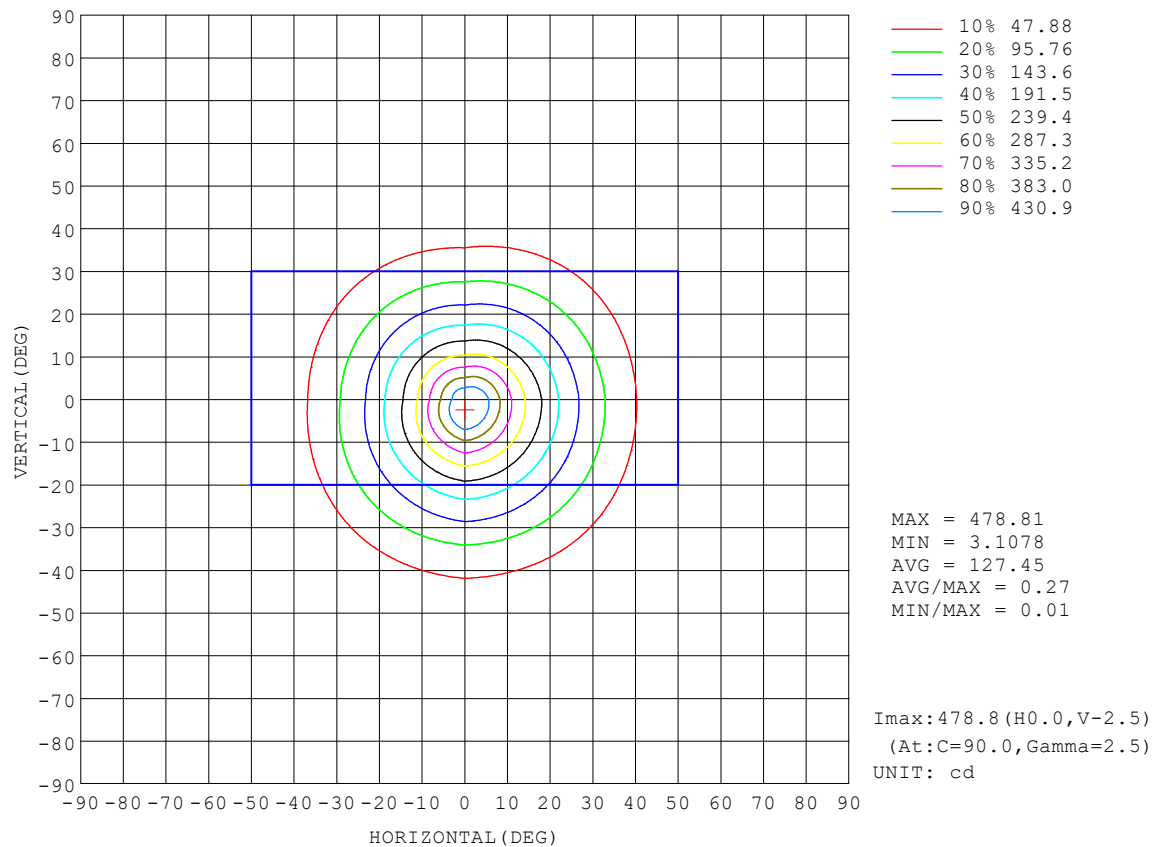

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25°C
 Operators:YHX
 Test Date:2025-09-09


Checker: YHX

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.456
 Humidity:55%
 Test Distance:1.160m [K=1.0000]
 Remarks:

Assessor: ZQQ

AAI Figure

Test:U:230.10V I:0.0143A P:2.0057W PF:0.6091 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:244.963x1 lm		
NAME: GU10-9D 2W 2700K 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: KLITE	SUR.:	Shielding Angle:

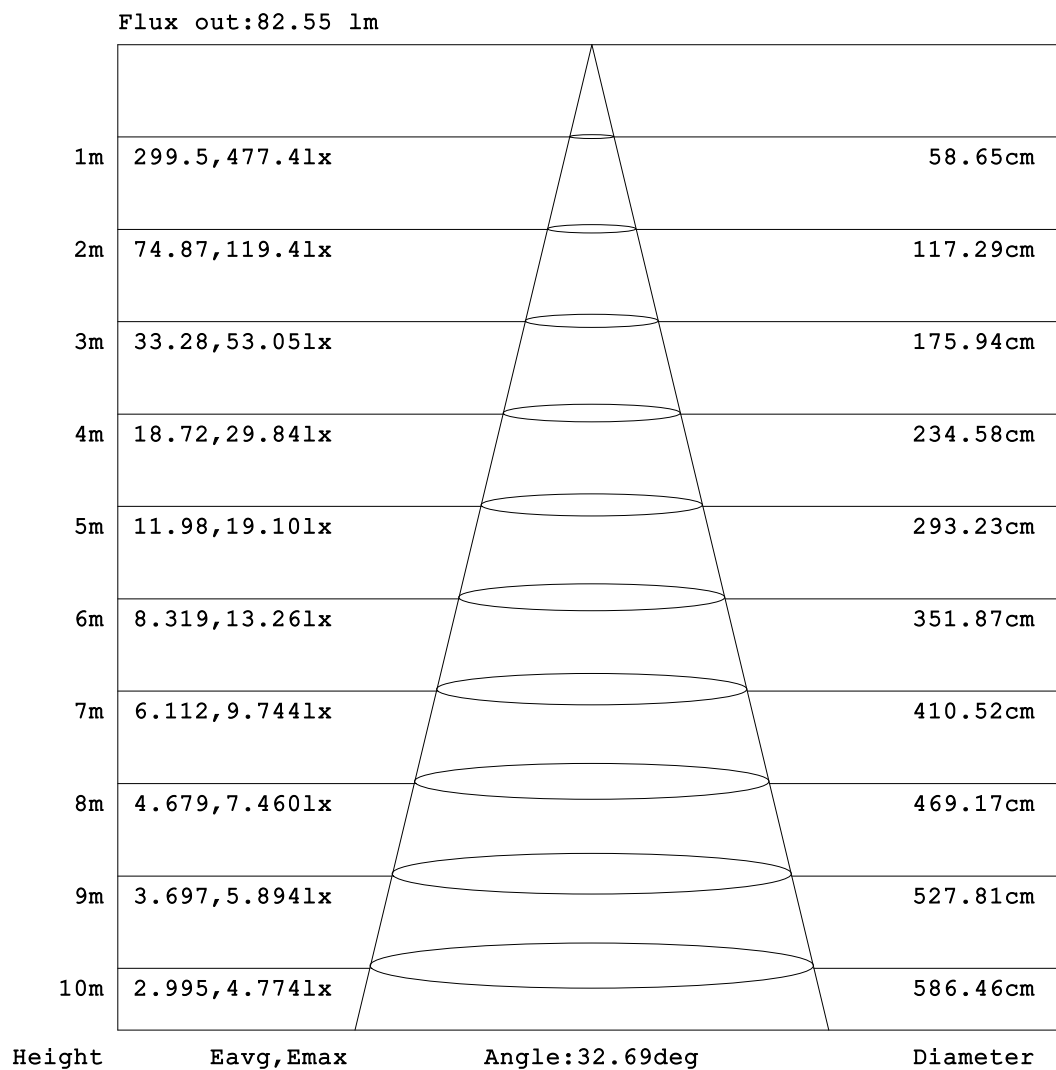

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25°C
Operators:YHX
Test Date:2025-09-09


γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.456
Humidity:55%
Test Distance:1.160m [K=1.0000]
Remarks:

Checker: YHX

Assessor: ZQQ

ISOLUX DIAGRAM

Test:U:230.10V I:0.0143A P:2.0057W PF:0.6091 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:244.963x1 lm		
NAME: GU10-9D 2W 2700K 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: KLITE	SUR.:	Shielding Angle:

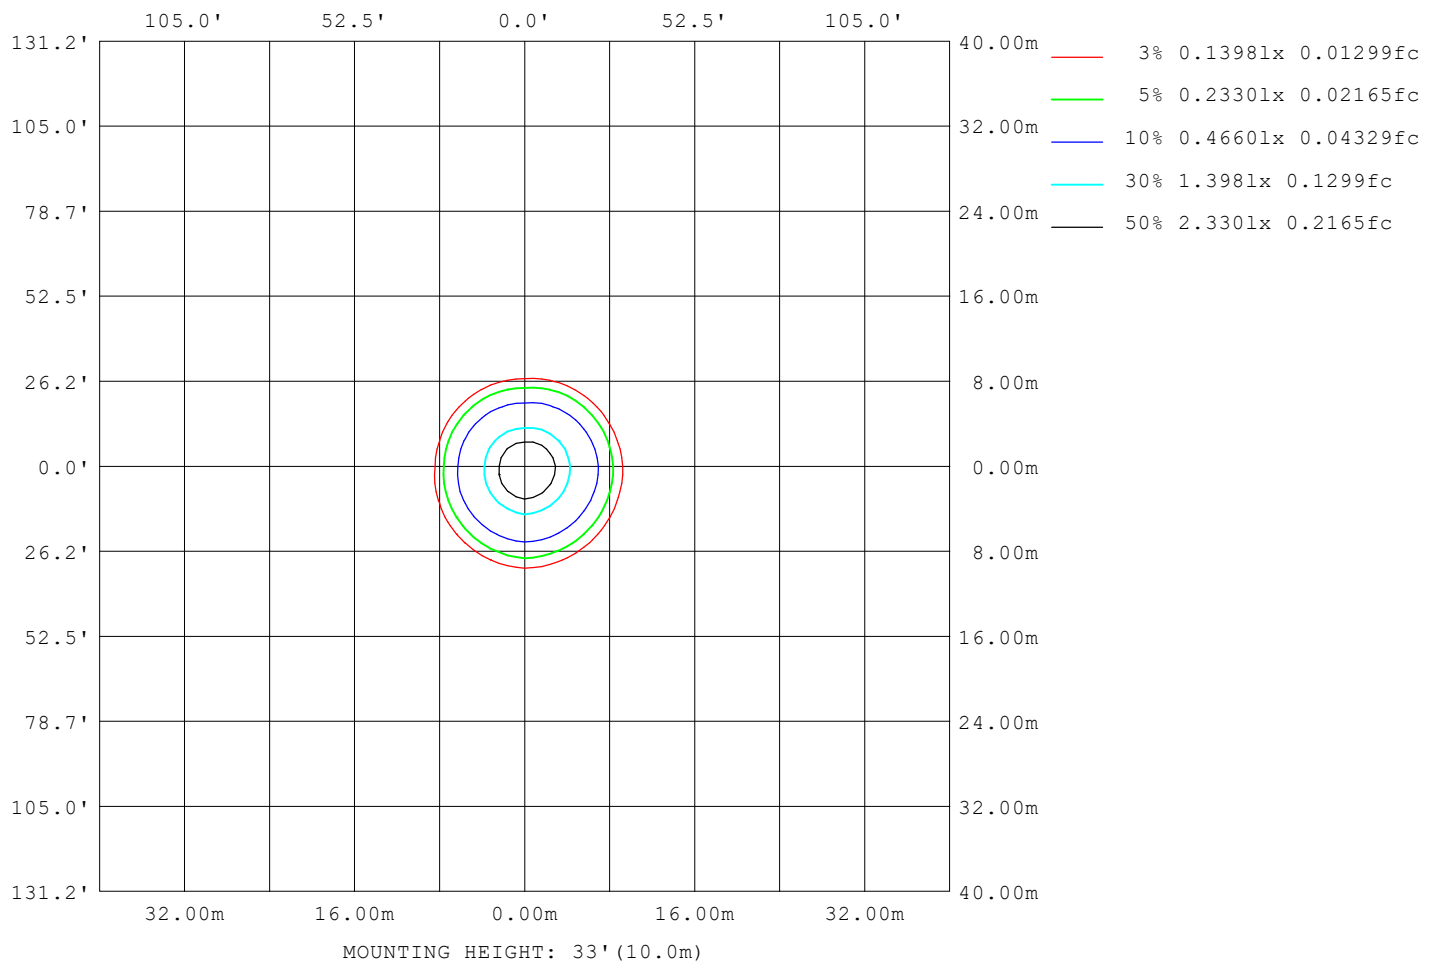

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25°C
Operators:YHX
Test Date:2025-09-09

Checker: YHX

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.456
Humidity:55%
Test Distance:1.160m [K=1.0000]
Remarks:

Assessor: ZQQ

LED Avg.L Report

Test:U:230.10V I:0.0143A P:2.0057W PF:0.6091 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:244.963x1 lm		
NAME: GU10-9D 2W 2700K 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: KLITE	SUR.:	Shielding Angle:

AvgL	cd/m2
L_0~180 (65) av	46
L_0~180 (75) av	48
L_0~180 (85) av	87
L_90~270 (65) av	45
L_90~270 (75) av	47
L_90~270 (85) av	88
L_45 (65) av	45
L_45 (75) av	47
L_45 (85) av	87

Standard: GB/T 29293-2012


C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25℃
Operators:YHX
Test Date:2025-09-09

Checker: YHX

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.456
Humidity:55%
Test Distance:1.160m [K=1.0000]
Remarks:

Assessor: ZQQ

Planar Illuminance Curve

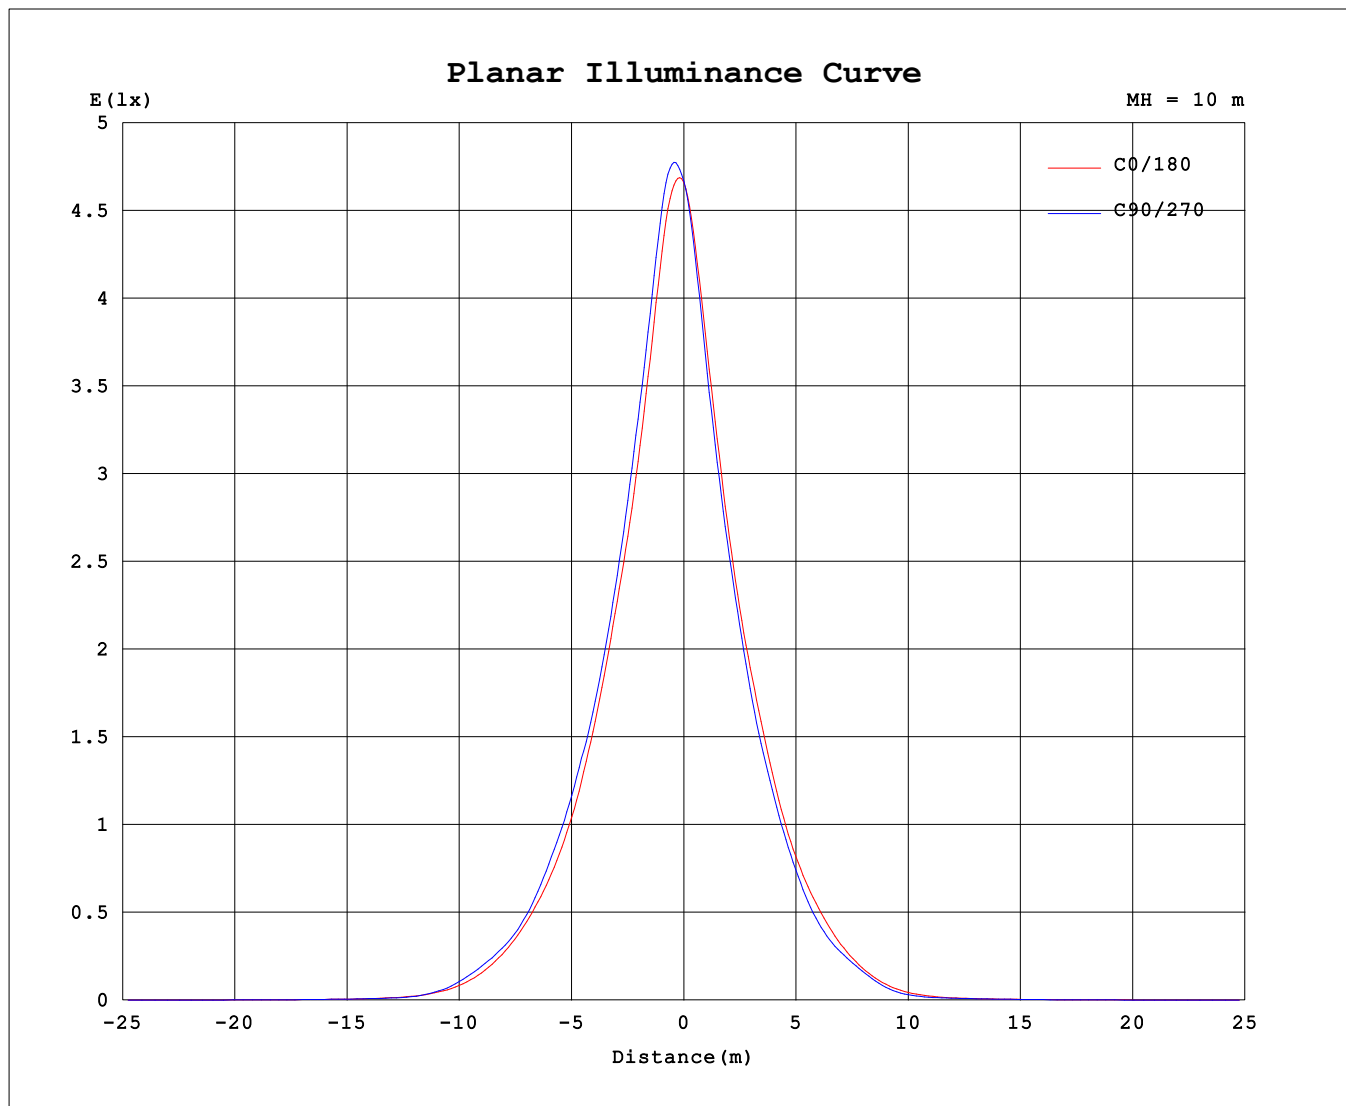

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature: 25°C
 Operators: YHX
 Test Date: 2025-09-09

Checker: YHX

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.456
 Humidity: 55%
 Test Distance: 1.160m [K=1.0000]
 Remarks:

Assessor: ZQQ

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:230.10V I:0.0143A P:2.0057W PF:0.6091 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:244.963x1 lm		
NAME: GU10-9D 2W 2700K 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: KLITE	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	90	180	270														
0	466	466	466	466														
5	441	465	395	383														
10	352	377	305	291														
15	277	296	232	221														
20	215	229	177	163														
25	160	178	127	117														
30	117	132	90.0	76.5														
35	81.6	88.7	58.1	49.8														
40	49.6	57.7	31.1	27.5														
45	23.9	30.1	12.8	8.96														
50	9.61	8.90	5.46	4.53														
55	4.63	4.45	3.45	3.16														
60	2.82	2.90	2.49	2.23														
65	1.98	2.03	1.90	1.74														
70	1.61	1.68	1.50	1.39														
75	1.28	1.31	1.18	1.10														
80	1.03	1.07	1.02	0.88														
85	0.79	0.87	0.73	0.66														
90	0.64	0.67	0.52	0.47														
95	0.50	0.49	0.43	0.40														
100	0.49	0.46	0.46	0.42														
105	0.53	0.47	0.44	0.42														
110	0.51	0.48	0.44	0.44														
115	0.51	0.51	0.54	0.55														
120	0.57	0.49	0.49	0.45														
125	0.43	0.44	0.43	0.42														
130	0.43	0.45	0.40	0.38														
135	0.41	0.44	0.38	0.39														
140	0.35	0.40	0.34	0.34														
145	0.33	0.37	0.35	0.35														
150	0.32	0.36	0.37	0.37														
155	0.33	0.38	0.40	0.39														
160	0.34	0.38	0.39	0.39														
165	0.32	0.36	0.33	0.33														
170	0.16	0.25	0.20	0.20														
175	0.03	0.04	0.05	0.05														
180	0.00	0.00	0.00	0.00														

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25℃
Operators:YHX
Test Date:2025-09-09

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.456
Humidity:55%
Test Distance:1.160m [K=1.0000]
Remarks:

Checker: YHX

Assessor: ZQQ